

FUJITSU

Halcyon



MINI-SPLIT HEATING AND COOLING SYSTEMS
FOR RESIDENTIAL AND LIGHT COMMERCIAL APPLICATIONS



A modern, energy-efficient home interior. The room features a white sofa with orange cushions, a brick fireplace with a TV mounted above it, and large windows overlooking a green yard. The floor is made of dark wood planks. A white air conditioning unit is visible on the left wall. The overall design is clean and contemporary.

QUIETLY REVOLUTIONIZING ENERGY-EFFICIENT HOME



COMFORT.

TABLE OF CONTENTS

FEATURES

Mini-Splits Defined	4
Individual Zoning	6
Comfort Solution	8
Energy Efficient	9
Comfort & Convenience	10
Applications	11
FGLair® App	12
WiFi Selection Guide	13
XLTH Story	14
Feature Explanation	15
System Feature Summary Table	16

MODEL LINEUP

Indoor and Outdoor Model Table	18
--------------------------------------	----

SINGLE-ZONE MINI-SPLITS

Wall Mount	20
Floor Mount	32
Compact Cassette	34
Slim Duct	36
Universal Floor/Ceiling	38
Ceiling Suspended	38
Large Cassette	40

MULTI-ZONE MINI-SPLITS

Overview	42
Indoor Units	
Wall Mount	46
Slim Duct	48
Compact Cassette	50
Floor Mount	52
Outdoor Units	
Multi-Zone (2-4 Zones)	54
XLTH Multi-Zone (2-3 Zones)	56
Flex-Zone (2-8 Zones)	58
Branch Boxes	60
Piping	61
Allowable Combinations	64

ACCESSORIES

Descriptions	67
Compatibility Chart	69

MISCELLANEOUS

Line Set Length Chart	70
Model Nomenclature	70



FUJITSU MINI-SPLITS: YEAR-ROUND, WHOLE-HOME OR BUSINESS ENERGY EFFICIENT HEATING AND COOLING

WHAT IS A MINI-SPLIT?

Halcyon systems eliminate the need for a basement or attic-located evaporator unit and bulky ductwork by using thin copper tubing that pumps refrigerant directly to discreet wall mounted or concealed units inside. Even more remarkable, this same unit works in reverse in winter, absorbing heat from the outside air and moving it indoors to heat your home. The result? Efficient cooling and heating for year-round, whole-house comfort in most climates.


Available in numerous mix-and-match capacities and configurations, there's a Halcyon mini-split system for even the most difficult to heat and cool areas.

HOW DOES A MINI-SPLIT WORK?

Like your refrigerator, heat pumps use electricity to pump refrigerant and transfer heat from one space to another. When we transfer heat from within our home to the outdoors, we call it "air conditioning". Conversely, when we transfer heat from the outdoors to within the home, we call it a "heat-pump".




WALL MOUNT UNIT

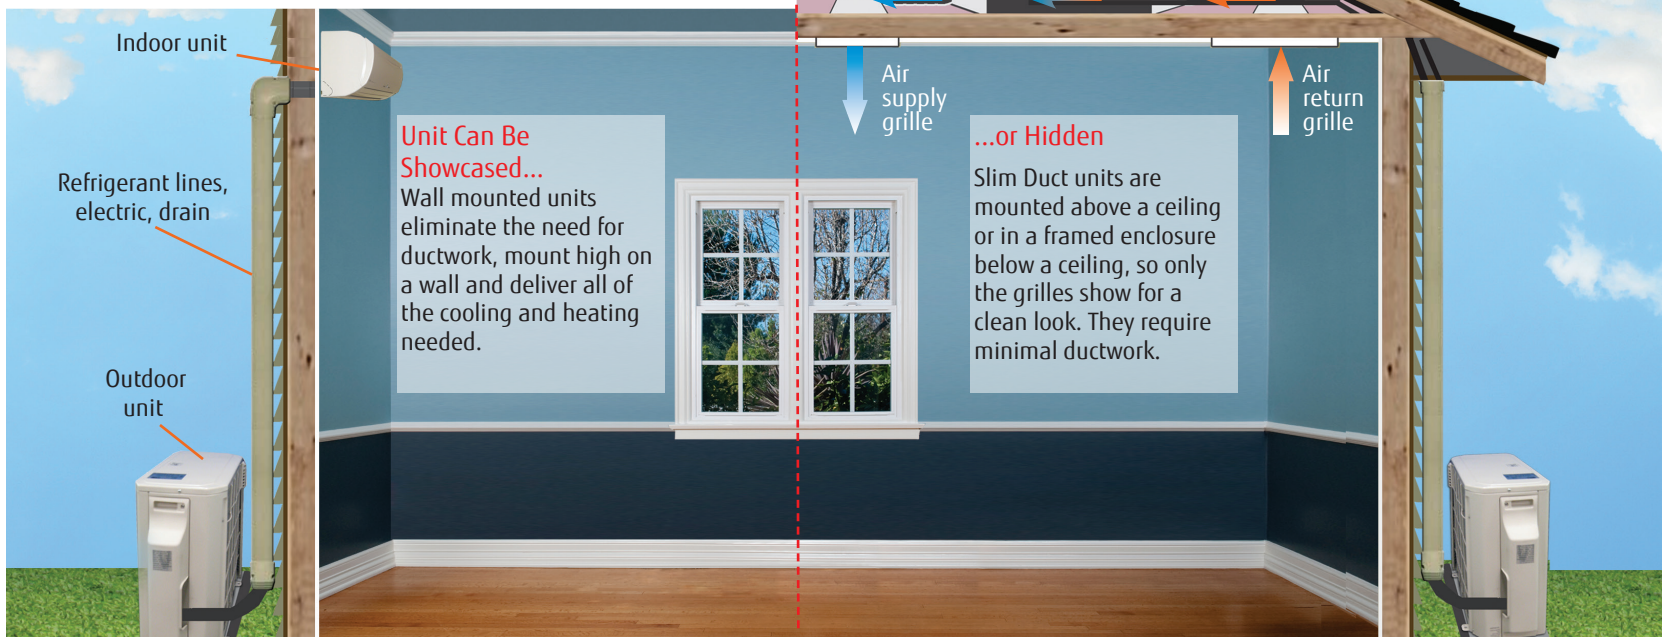


HEAT PUMPS PROVIDE HEAT WHEN IT IS COLD

Because refrigerant is naturally much colder than outdoor temperatures even on a very cold day, it actually absorbs heat from outdoors, and transfers the heat it absorbs outside to within your home. The refrigerant's physical properties do this naturally. We use efficient compressors to pump refrigerant via small copper tubing from outdoors to indoors. Because we move the heat rather than create it (as electric baseboard or resistant heat does), we can deliver up to 4 times the heat for the energy we consume as baseboard heat!

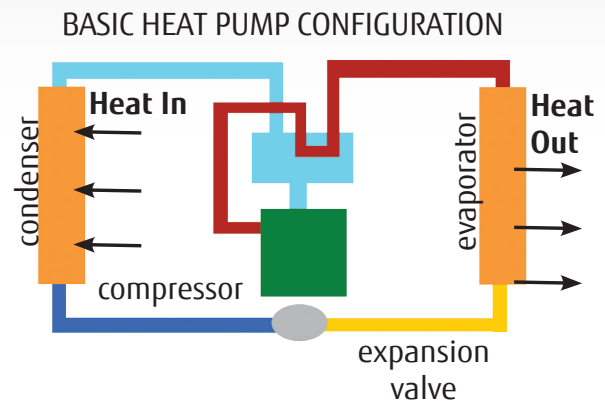


AIR CONDITIONERS PROVIDE COOLING WHEN IT'S WARM


Come spring and summer, simply reverse the process and put the same system into "cooling mode" and transfer heat from indoors to the outside. For many climates, the advanced technology that goes into these units creates a far more cost effective alternative to either gas or oil-fired units for heat, or a central ducted system for air conditioning. Fujitsu's full mini-split line up are heat pumps, which provide both heating and cooling.

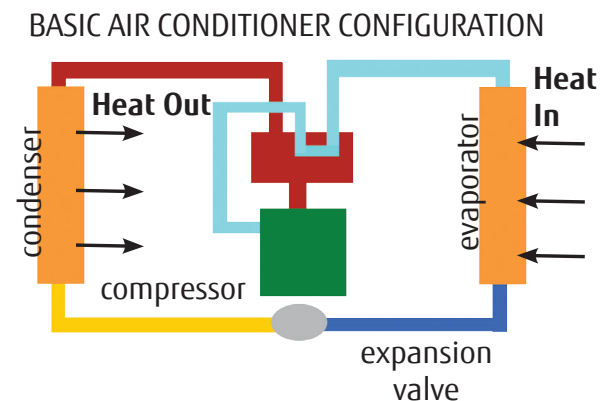

ELECTRIC HEATERS VERSUS HEAT PUMPS

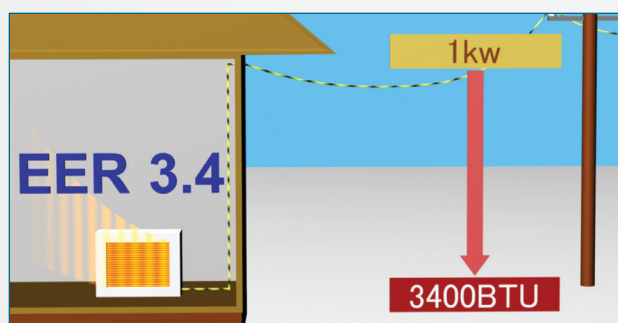

An electric heater converts electricity directly to heat, and if we assume that the heat loss is zero, the output from one kilowatt input is one kilowatt or 3,400 BTU and the EER is 3.4.

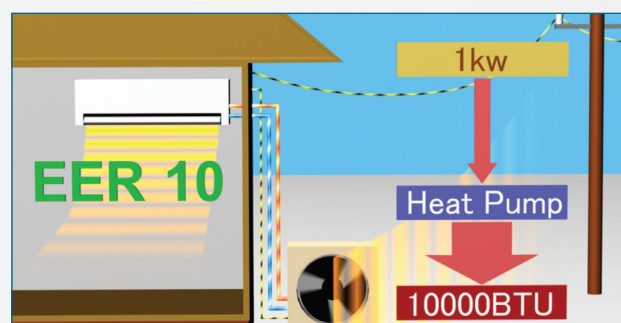

Heat pumps are more efficient than some other forms of heating because heat pumps do not actually create heat - they just move it from one place to another. For example, the output of an efficient 10 EER heat pump is almost triple that of an electric heater.

*EER (Energy Efficiency Rating) = Rated BTU capacity divided by total kW input.

INDIVIDUAL ZONING: PERSONALIZED WHOLE-HOME COMFORT

Halcyon HFI Systems are some of today's most advanced forms of heating and air conditioning. One outdoor unit can operate up to 8 indoor units simultaneously. Fujitsu's HFI Systems are super quiet as well as highly energy efficient.


- **HFI** - This symbol denotes indoor units that can be used in single OR multi-zone applications
- Each indoor unit can be operated independently via remote control
- Choose from a variety of indoor unit styles
- Provide both heating and cooling (not simultaneously)
- High energy efficiencies
- Quiet operation



WALL MOUNTED

They mount high on a wall, out of sight and do not require ductwork, increasing energy efficiency.

- Quiet operation
- Easy maintenance
- High delivered efficiency means lower utility bills

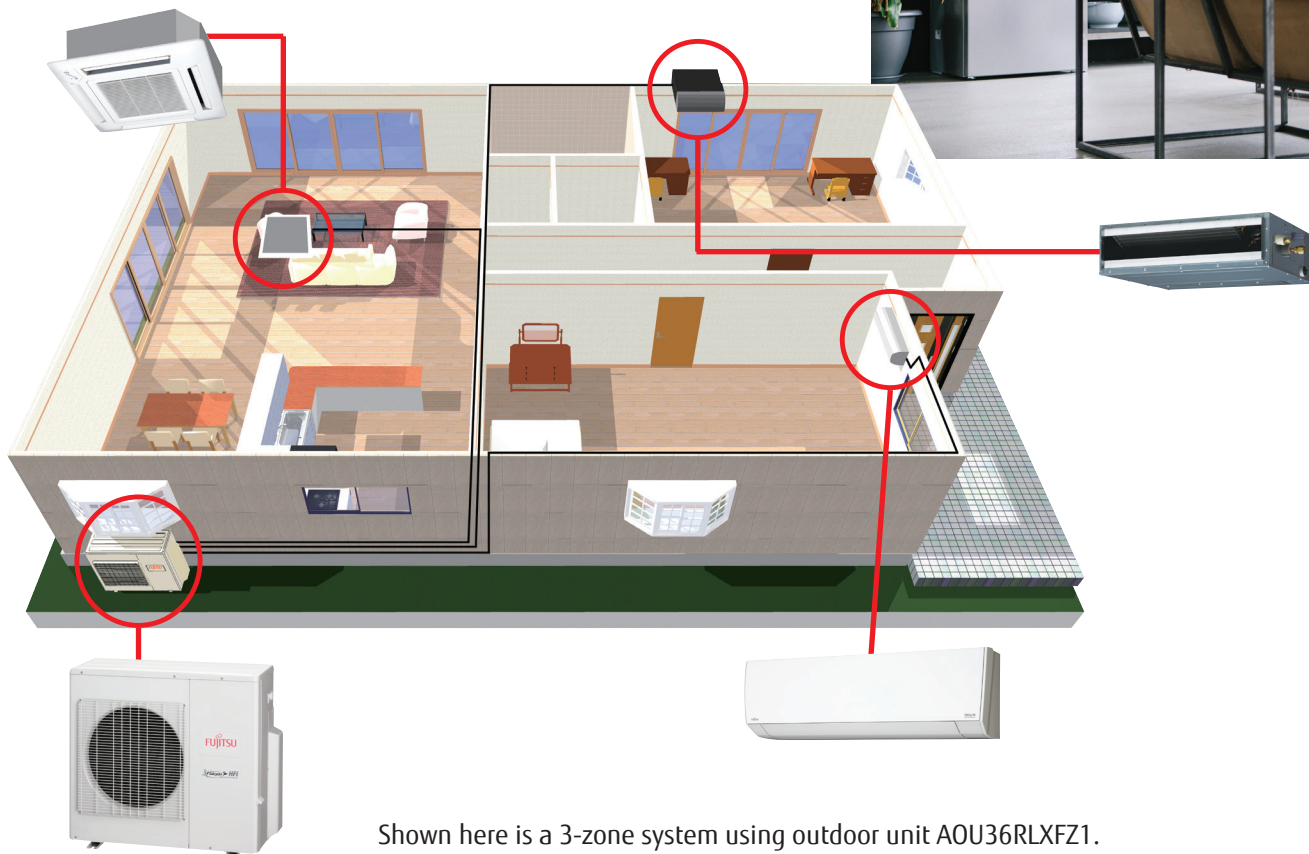

Shown here is a 3-zone system using outdoor unit AOU36RLXFZ1.



SLIM DUCT

Mounted in a ceiling or in a framed enclosure below a ceiling. They use minimal ductwork and remain very energy efficient.

- Concealed and out of sight
- Look of central air with the efficiency of a mini-split
- Less ducts = higher efficiency

FLOOR MOUNTED

Floor mount systems are ideal for residential radiator replacements or any room with limited upper wall space, like a kitchen or sunroom.

- Compact size fits easily under a standard window
- Features twin airflow for improved heat delivery and help those cold feet.
- Designer wireless remote control



COMPACT CASSETTE

Cassettes are extremely discreet, with only the grille showing in the ceiling. They use the latest fan technology to distribute the conditioned air evenly.


- Wired remote control (wireless is optional)
- Powerful turbo fan operation
- Fits into a standard 2' x 2' ceiling grid

A SOLUTION FOR ALL OF YOUR COMFORT NEEDS

DUCTLESS TECHNOLOGY

Don't waste money cooling and heating the ducts in your walls and attic. Fujitsu systems are ductless, meaning they install easily and won't take up valuable closet space. Since mini-splits have little to no ducting, they forego those energy losses typically associated with central forced-air systems. Duct losses in a central air system can easily account for more than 30% of energy consumption, especially if the ducts are not sealed tight or in an unconditioned space such as an attic or crawlspace.

CENTRAL AIR SYSTEM VERSUS FUJITSU HFI QUAD ZONE

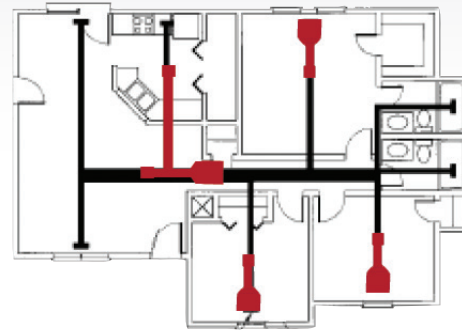

Thick black lines represent ducts of a central air system.

Red lines represent mini-ducts of a Fujitsu Quad Zone Slim Duct System.

WHOLE HOME OR BUSINESS COMFORT

Fujitsu's Halcyon HFI systems provide home and business owners just the right amount of heating and cooling needed by installing 2 to 8 indoor units connected to one outdoor unit. Indoor units vary by size and style and each creates its own "zone" of comfort, allowing you to heat or cool individual rooms, hallways and open spaces.



A YEAR ROUND SOLUTION

Revolutionary Halcyon heat pumps provide both heating and cooling for year round comfort in most climates. A simple push of a button on the remote control allows you to switch from heating to cooling (or vice versa) automatically.



Stay Comfortable.

OTHER APPLICATIONS

The 30RLXEH is specially engineered for spaces such as server rooms which require constant cool temperatures year round, and rooms that hold a large number of people (meeting spaces, classrooms, conference rooms).



ENERGY EFFICIENT: THE SMART CHOICE IN COMFORT

As much as half of the energy used in your home goes to heating and cooling. So, making smart decisions about your home's heating and air conditioning system can have a big effect on your utility bills – and your comfort.

WHERE DOES MY MONEY GO?



The high energy efficiencies of Halcyon systems slash utility bills by up to 25%. If your average annual utilities are \$4,200, Fujitsu can save you up to \$1,050 annually or \$10,500 in 10 yrs!*

*Savings may vary based on model selected, hours of operation and geographical location. Example given based on 33-SEER system versus 14-SEER system.

REBATES

To encourage customers to buy energy efficient products, many local utility companies offer significant rebates for the purchase of a ductless mini-split system. Go to Fujitsu's web site to search for local rebates and consumer loans. We provide a listing of rebates and offerings on qualifying Fujitsu mini-splits by zip code.

www.fujitsugeneral.com

ENERGY STAR® QUALIFIED SYSTEMS

If your HVAC equipment is more than 10 years old or not keeping your house comfortable, you should have it looked at by a professional HVAC contractor. If it is not performing efficiently or needs upgrading, consider replacing it with a unit that has earned ENERGY STAR®. Installed correctly, these high-efficiency heating and cooling units can save up to 25% on heating and cooling costs.


Fujitsu has 30 systems that are ENERGY STAR qualified in 2018. See the lineup chart on pages 18-19 for a full listing of all ENERGY STAR® qualified systems.



SEER..... ≥ 15.0

EER..... ≥ 12.5


HSPF..... ≥ 8.5

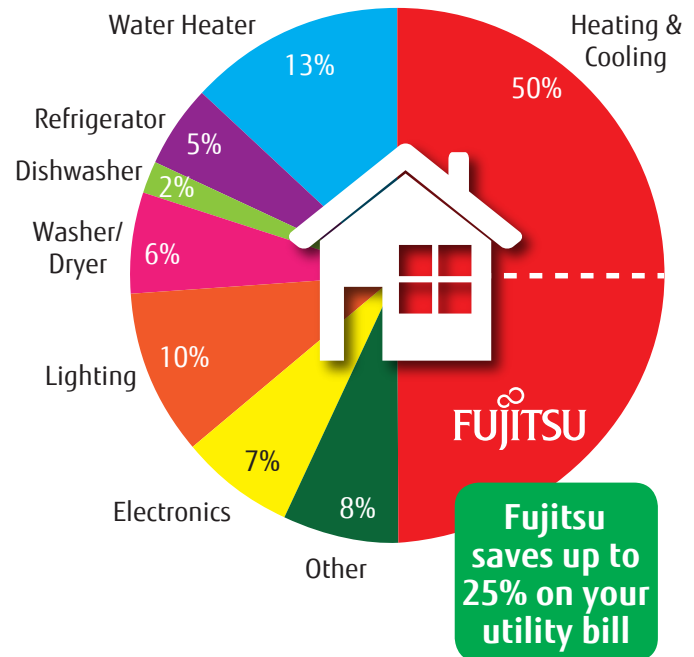

COMFORT AND CONVENIENCE

FLEXIBLE AND QUIET

Mini splits offer flexibility because they can be suspended from a ceiling, mounted flush behind a drop ceiling, hung on a wall or floor-standing. Ductless heat pumps allow for a peaceful inside environment by enabling the contractor to install components like compressors and motors outdoors.

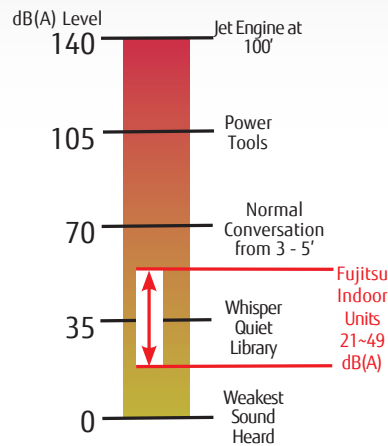


CONSTANT COMFORT THROUGH INVERTER TECHNOLOGY


Inverter technology is like cruise control for your heating or cooling system. Compressors only run as fast as they need to handle the cooling or heating demand. They can handle greater extremes in temperature, are smoother and more stable in operation, and reach the desired temperature more quickly than conventional air conditioners.

Inverter Benefits

- More heat at lower outdoor temperatures
- Lower RPMs = quieter operation
- Desired temperature in half the time
- Up to 30% more efficient
- Stable temperature

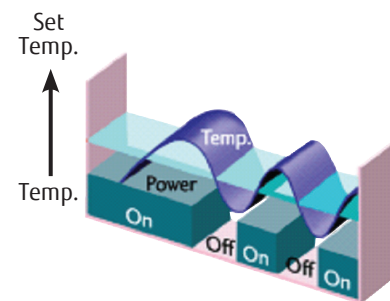

Conventional System

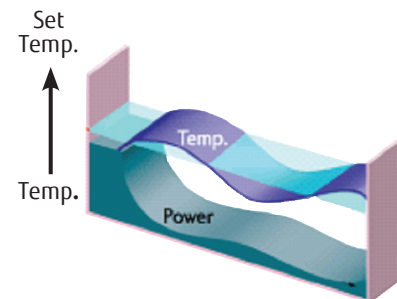

Inverter System

USER FRIENDLY CONTROL

Fujitsu is using ergonomics to expand the use of user friendly designs such as easy-to-read large LCD displays, easy-to-operate buttons, and displays with easily recognizable colors and icons. We are producing control systems that provide greater convenience for both individual and centralized control with operability suitable for the application.



Optional Wired Remote
UTY-RVNUM

Standard Wireless Remote for select systems



APPLICATIONS



WHERE CAN MINI-SPLITS BE USED?

Convenience stores
Fast food chains
Fire houses
Police stations
Bars
Sunrooms and additions
Warehouses
Nursing homes
Small offices
Older homes
New construction homes
Schools
Places of worship
Hospitals and
medical facilities
Restaurants
Computer rooms
Hotels and motels
ATM vestibules
Server rooms



JUST ABOUT ANY
PLACE THAT
REQUIRES
COMFORT!


FGLair® APP

Control your home's climate anytime, anywhere!

Access control functions remotely from any smartphone or tablet.



WALL UNIT




SLIM DUCT



FLOOR UNIT




CEILING CASSETTE

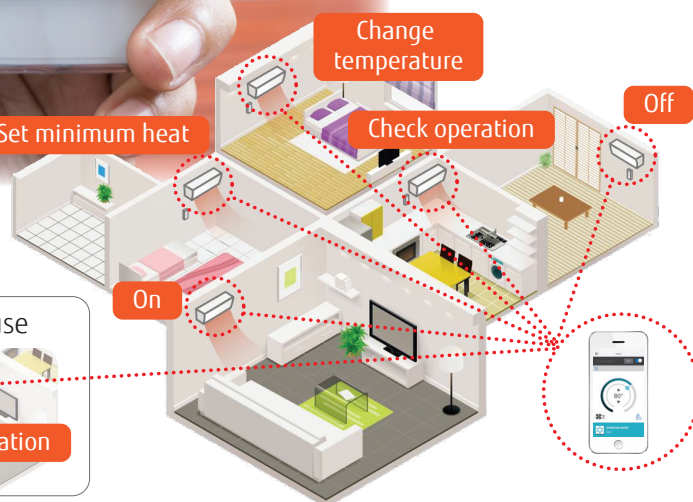

USER FRIENDLY INTERFACE

User friendly screen display facilitates easy operation.

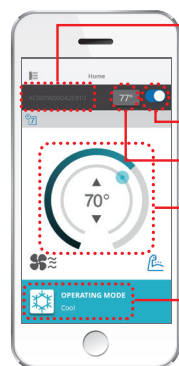

Individual AC name display

ON/OFF button

Room temperature*

Temperature setting

Operation mode

Control up to 24 systems using a single free account.

MAIN FUNCTIONS

- ON / OFF
- Operation mode
- Fan speed
- Louver position
- Set temperature control
- Weekly timer
- Minimum heat
- ESP function
- Error display
- Email notification





*Only applies to RLS3Y units. Feature not available with Wi-Fi module (UTY-TFNXZ2).



FGLair® is worldwide trademark of FUJITSU GENERAL LIMITED.

FUJITSU HALCYON WIFI SELECTION GUIDE

WIFI CONNECTABLE UNITS & MODULES

FGLAir®		IntesisHome®	
			
RLS3Y & RLS3YH (Built In)	WIFI Interface Module	IR Wireless Module	Wired Module
ASU 9/12/15 RLS3Y	UTY-TFNXZ2 (Add-on)	FJ-IR-WIFI-1NA (Add-on)	FJ-RC-WIFI-1NA (Add-on)

WHICH APP DOES IT USE?

FGLAir®	IntesisHome®
FGLAIR® APP FEATURES:	INTESISHOME® APP FEATURES:
<ul style="list-style-type: none"> • On/Off • Change Mode • Change Temp Setpoint • Fan Speed • Louver/Swing Position • Weekly Timer • Economy Setting • Emailed Error Alerts 	<ul style="list-style-type: none"> • On/Off • Change Mode • Change Temp Setpoint • Fan Speed • Louver/Swing Position • Weekly Timer • Fully Programmable • Alarm Notifications
App available on iOS and Android.	App available on iOS and Android. Can also be run through a web browser.

WHERE DOES IT MOUNT?

Built into the RLS3Y	On the wall next to IDU	Up to 20' away from IDU	On the wall next to IDU
----------------------	-------------------------	-------------------------	-------------------------

COMPATIBLE UNITS:

WALL MOUNTS:	WALL MOUNTS:	WALL MOUNTS:	WALL MOUNTS:
ASU9RLS3Y	ASU 7 / 9 / 12RLF ¹	ASU 7 / 9 / 12RLF	ASU 7 / 9 / 12RLF ^{6,7}
ASU12RLS3Y	ASU 7 / 9 / 12 / 15RLF1 ²	ASU 7 / 9 / 12 / 15RLF1	ASU 7 / 9 / 12 / 15RLF1 ^{6,7}
ASU15RLS3Y	ASU 9 / 12 / 15RLS2 ³	ASU 9 / 12 / 15RLS2	ASU 9 / 12 / 15RLS2 ^{6,8}
	ASU 9 / 12 / 15RLS3 ³	ASU 9 / 12 / 15RLS3	ASU 9 / 12 / 15RLS3 ^{6,8}
	ASU 18 / 24RLF	ASU 18 / 24RLF	ASU 18 / 24RLF
	ASU 30 / 36CLX1	ASU 30 / 36CLX1	ASU 30 / 36CLX1
	ASU30RLX	ASU30RLX	ASU30RLX
	ASU 18 / 24RLB	ASU 18 / 24RLB	ASU 18 / 24RLB
	ASU 30 / 36RLXB	ASU 30 / 36RLXB	ASU 30 / 36RLXB
	ASU30RLE	ASU 9/12RL2	ASU 18CL / 24CL1
		ASU 18CL / 24CL1	
	CASSETTES:	CASSETTES:	CASSETTES:
	AUU 7 / 9 / 12 / 18RLF	AUU 7 / 9 / 12 / 18RLF	AUU 7 / 9 / 12 / 18RLF
			AUU 18 / 24 / 36 / 42RCLX
	DUCTED:	DUCTED:	DUCTED:
	ARU 7 / 9 / 12 / 18 / 24RLF	ARU 7 / 9 / 12 / 18 / 24RLF ⁴	ARU 7 / 9 / 12 / 18 / 24RLF
	FLOOR MOUNTS:	FLOOR MOUNTS:	FLOOR MOUNTS:
	AGU 9 / 12 / 15RLF	AGU 9 / 12 / 15RLF	AGU 9 / 12 / 15RLF ⁶
	UTY-TFNXZ2 cannot be installed in conjunction with Wired Remote Controls.	UNIVERSAL / CEILING:	UNIVERSAL / CEILING:
		ABU 18 / 24RULX	ABU 18 / 24RULX
		ABU36RSLX	ABU36RSLX

¹ requires UTY-XCBXZ1

² requires UTY-XCBXZ2

³ requires UTY-TWBXF1

⁴ requires UTY-LRHUM

⁶ requires UTY-WIFI

⁷ requires UTY-XCBXZ2

⁸ requires UTY-TWBXF1

EXTRA LOW TEMPERATURE HEATING - XLTH

NOT ALL HEATING SYSTEMS ARE CREATED EQUAL

Without the right technology, a system won't work when its needed most.

PROTECTION FROM WINTERS' COLDEST TEMPERATURES


When the temperature drops you don't want to be left in the cold. It's important to choose a heat pump system rated for the climate you live in. If your system doesn't operate in severe conditions you and your family could be left without any heat at all.

Fujitsu's line of mini-split heat pumps come in different sizes, styles, and rated outdoor temperatures. The Extra Low Temperature Heating (XLTH) Series features outdoor condensing units engineered to operate in temperatures down to -15°F.



HIGH PERFORMANCE HEATING


Fujitsu XLTH units feature large heat exchangers and high capacity compressors. This gives our XLTH heat pumps the ability to extract heat even at very low outdoor temperatures. For example, at an indoor setpoint of 70°F, all RLS3YH and RLFFH models can deliver 100% or more of their rated heating capacity down to 3°F. All XLTH models also offer superior heating performance down to -15°F outdoor temperatures.



Fujitsu XLTH systems do not have a low temperature lockout, continuing to heat even below -15°F as conditions allow.

METAL FAN GUARD


While other models have a plastic fan guard, XLTH models use metal, which is most capable of withstanding the colder elements.

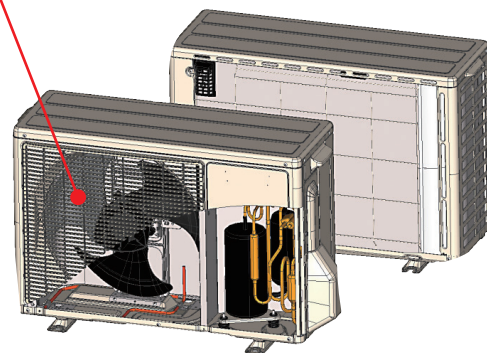

Without the right technology, condensate freezes to the bottom of the unit and reduces its efficiency and heating output.


IMPROVED HEATING CAPACITY

Heating capacity at low outdoor temperatures was improved by adopting a large heat exchanger and a high capacity compressor.

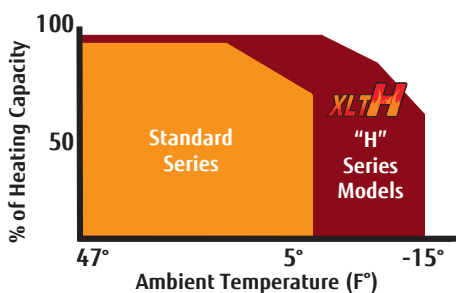

BASE PAN HEATER

- Equipped with a heater that prevents condensate from freezing
- Contoured base design discharges melted water through drain holes.
- Without a heater, freezing condensate can cause noise, damage to fan blade, condenser, and system performance.

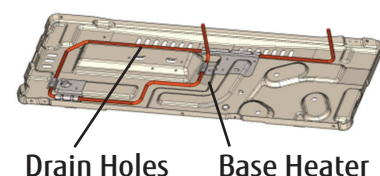

FEATURE EXPLANATION

ENERGY SAVING

SEER

Seasonal Energy Efficiency Rating. Used to express efficiency of an AC or Heat Pump. A higher rating means more efficient.

HSPF

Heating Seasonal Performance Factor, measures the efficiency of heating portion of your heat pump.



Economy Mode

Thermostat setting automatically changes according to the temperature to avoid unnecessary cooling and heating.



Energy Saver

Keeps room cool enough for comfort by using a relaxed thermostat setting reducing power consumption.



Energy Saving Program (ESP)

If a space is left without turning the unit off, ESP knows that it is unoccupied and 20 minutes later, temperature is adjusted accordingly until users return to the room. Function is disable in multi-zone installations.



ENERGY STAR® Qualified

Qualified products and practices help you save money and reduce greenhouse gas emissions by meeting strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and the U.S. Department of Energy.



Minimum Heat Mode

Sets room temperature to 50°F, keeping temperatures above freezing and reducing power consumption.

COMFORT



Auto Changeover (heating to cooling or vice-versa)*

Automatically alternates between heating or cooling if the room temperature falls 4°F below the set temperature when cooling or rises 4°F above set temperature when heating.



Auto Fan Mode

System starts in high fan speed and automatically adjusts downward as room begins to reach set temperature.



Auto Louver: 4 Way

Redirects airflow automatically with up/down and left/right motion.



Auto Louver: Up/Down

Redirects airflow automatically with seven position up and down motion which can be set to auto swing.



Auto Restart

Following a power failure, systems will automatically restart in the same operating mode as before, once power has been restored.



Dry Mode

This mode gives priority to reducing the level of humidity in the room, in conjunction with lowering the temperature.



Fresh Air Intake

Outside air can be introduced by attaching field supplied flexible duct to fresh air knockouts.



Outdoor Unit Low Noise+

Limits compressor and fan speed during high speed operation for noise reduction purposes.



Powerful Operation

20 minutes of continuous operation at maximum airflow and maximum compressor speed. Rapid cooling and heating makes the room comfortable quickly.



Quiet Mode (Indoor Unit)

An extra quiet fan speed to make sure you are not disturbed.

+ Function is bypassed during defrost and at low speed operation. This feature may limit cooling/heating capacity during high/low ambient conditions and increase energy consumption as system may need to operate longer due to reduced compressor speed.

* Auto Changeover is not designed to provide rapid changes between heating and cooling operation or simultaneous heating and cooling. This feature is not recommended for systems with more than one indoor unit unless all indoor units have similar heating and cooling requirements and have similar temperature set points. If all indoor units have similar heating and cooling requirements and have similar temperature set points, auto changeover will work.

CONVENIENCE



24 Hour Timer

Allows for one on/off cycle during a 24 hour period.



Sleep Timer

Automatically adjusts the temperature while you sleep to make you more comfortable.



Weekly Timer

Allows you to set on/off time twice a day and a different on/off time by day.

PERFORMANCE



Apple Catechin Filter (polyphenol ingredient from apples)

Dust, mold spores and microorganisms are absorbed onto the filter by static electricity and growth is inhibited. 3 - 12 month life expectancy.



Cold Prevention

Indoor coil will warm prior to fan operating, preventing cold air during heating mode.



Expanded Heating Performance

Delivers 100% of rated heating capacity at +5°F (-15°C).



High Ceiling Mode

Temperature at the top of a high ceiling room may be warmer than the space occupied; this mode adjusts for this difference.



Ion Deodorizing Filter

Deodorizes by decomposing absorbed odors using the oxidizing and reducing effects of ions generated by fine ceramic particles. 3 year life expectancy. Wash to restore surface action.



Pump Down Operation

Collects all refrigerant in system back into the outdoor unit when the unit is to be moved or before servicing the refrigerant circuit.



Remote Temperature Sensor

Room temperature sensor is located in optional wired remote control only.



Third Party Device Control

Turns system on or off using a normally closed circuit. Interface with third party devices such as home automation.



0°F Low Ambient Cooling

Can operate in cooling mode with outdoor temperatures as low as 0°F. Operation outside of factory specification is not recommended.



-5°F Low Ambient Cooling

Can operate in cooling mode with outdoor temperatures down to -5°F. Operation outside of factory specification is not recommended.

INSTALLATION



Base Pan Heater

Prevents condensate from freezing on the outdoor unit.



Blue Fin Heat Exchanger

Blue fin treatment to the outdoor unit's heat exchanger improves corrosion resistance.



Branch Duct Capable

Systems are capable of attaching field-supplied branch ducts providing up to 38% of the cooling up to 16 feet away.



Built-In Condensate Pump

Integrated into the indoor unit.



Daisy Chain

Ability to connect up to 16 identical style indoor units to one wired remote.



Long Piping Length

Long piping lengths between indoor and outdoor units provides flexibility and increased applications.



Slender Fit

Cassette body can be moved downward into the room 1-3/8" to accommodate limited ceiling space.



Standard Warranty

Fujitsu systems come standard with either a 6 Year Compressor / 2 Year Parts warranty or a 7 Year Compressor / 5 Year Parts warranty.



Extended Warranty




















Additional info on page 71. See full product warranty for details.

SYSTEM FEATURE SUMMARY













SYSTEM FEATURE SUMMARY	SEER	HSPF	Economy Mode	Energy Saver	Energy Saving Pgm (ESP)	ENERGY STAR® Qualified	Minimum Heat Mode	Auto Changeover	Auto Fan Mode	Auto Louver: 4 Way	Auto Louver: Up/ Down	Auto Restart	Dry Mode	Fresh Air Intake	Outdoor Unit Low Noise	Powerful Operation	Quiet Mode (Indoor Unit)	24 Hour Timer	Sleep Timer	Weekly Timer
MULTI-ZONE HEAT PUMPS	Floor Mount	21.5^	10.3^	●			●	●	●		●	●	●			●	●	●	●	□
	Cassette	21.5^	10.3^	●			▲	+	●		●	●	●	◆			●	▲	▲	●
	Slim Duct	14.7^	9.3^	●			▲	+	●			●	●	●			●	▲	▲	●
	Large Wall (RLF: 18, 24k BTU)	21.5^	10.3^	●			●	+	●	●		●	●				●	●	●	□
	Compact Wall (RLF1: 7-15k BTU)	21.5^	10.3^	●		*	●	+	●		●	●	●				●	●	●	□
SINGLE-ZONE HEAT PUMPS	LARGE CASSETTE	42RCLX	15.0	8.5		●		●	●		●	●	●	●						●
		36RCLX	14.0	8.5		●		●	●		●	●	●	●						●
		24RCLX	15.0	8.5		●		●	●		●	●	●	●						●
		18RCLX	16.0	8.5		●		●	●		●	●	●	●						●
	UNIVERSAL FLOOR / CEILING	36RSLX	14.0	8.5		□		●	●	●		●	●	●				●	●	□
		24RULX	15.0	8.5		□		●	●	●		●	●	●				●	●	□
		18RULX	16.0	8.5		□		●	●	●		●	●	●				●	●	□
	SLIM DUCT	18RLFCD	19.7	11.3	●		▲	●	●			●	●	●			●			●
		12RLFCD	20.0	11.5	●		▲	●	●			●	●	●			●			●
		9RLFCD	21.2	12.2	●		▲	●	●			●	●	●			●			●
	COMPACT CASSETTE	18RLFCC	20.1	11.5	●		▲	●	●		●	●	●	◆			●			●
		12RLFCC	21.9	12.2	●		▲	●	●		●	●	●	◆			●			●
		9RLFCC	24.0	13.0	●		▲	●	●		●	●	●	◆			●			●
	FLOOR MOUNT	15RLFFH	20.3	11.0	●		●	●	●		●	●	●			●	●	●	●	□
		15RLFF	20.3	11.2	●		●	●	●		●	●	●			●	●	●	●	□
		12RLFFH	22.7	11.3	●		●	●	●		●	●	●			●	●	●	●	□
		12RLFF	22.7	11.6	●		●	●	●		●	●	●			●	●	●	●	□
		9RLFFH	26.0	12.4	●		●	●	●		●	●	●			●	●	●	●	□
		9RLFF	26.0	12.6	●		●	●	●		●	●	●			●	●	●	●	□
	WALL MOUNT	36RLXB	15.5	9.0	●		●	●	●	●		●	●				●		●	□
		30RLXB	16.5	9.0	●		●	●	●	●		●	●				●		●	□
		30RLXEH	18.7	11.7	●	●	●	●	●	●		●	●		●	●	●		●	●
		24RLXFWH	19.5	10.0	●		●	●	●	●		●	●				●		●	●
		24RLXFW1	19.5	10.6	●		●	●	●	●		●	●				●	●	●	□
		24RLB	18.0	10.6	●		●	●	●	●		●	●				●		●	□
		18RLXFWH	20.0	10.4	●		●	●	●	●		●	●				●		●	●
		18RLXFW1	20.0	10.5	●		●	●	●	●		●	●				●	●	●	□
		18RLB	19.0	10.6	●		●	●	●	●		●	●				●		●	□
		15RLS3YH	25.3	13.3	●	●	●	●	●	●		●	●		●	●	●	●	●	●
		15RLS3Y	25.3	13.4	●	●	●	●	●	●		●	●		●	●	●	●	●	●
		12RLS3YH	29.3	13.8	●	●	●	●	●	●		●	●		●	●	●	●	●	●
		12RLS3Y	29.3	14.0	●	●	●	●	●	●		●	●		●	●	●	●	●	●
		12RLFW1	22.0	11.0	●		●	●	●	●	●	●	●			●	●	●	●	□
		12RL2	16.0	9.0	●			●	●		●	●	●			●	●		●	
		9RLS3YH	33.0	14.0	●	●	●	●	●	●		●	●		●	●	●	●	●	●
		9RLS3Y	33.0	14.2	●	●	●	●	●	●		●	●		●	●	●	●	●	●
		9RLFW1	23.0	11.0	●		●	●	●	●	●	●	●			●	●	●	●	□
		9RL2	16.0	9.0	●			●	●		●	●	●			●	●		●	

SINGLE-ZONE AND MULTI-ZONE SYSTEMS LINEUP



















SINGLE ZONE DUCTLESS HEAT PUMP SYSTEMS

BTU	9,000	12,000	15,000	
Wall Mount Highest SEER	 ASU9RLS3Y / AOU9RLS3 14°F -5°F	 ASU12RLS3Y / AOU12RLS3 14°F -5°F	 ASU15RLS3Y / AOU15RLS3 14°F -5°F	
Wall Mount Highest SEER plus XLtH	 ASU9RLS3Y / AOU9RLS3H 14°F -15°F	 ASU12RLS3Y / AOU12RLS3H 14°F -15°F	 ASU15RLS3Y / AOU15RLS3H 14°F -15°F	
Wall Mount High SEER	 ASU9RLF1 / AOU9RLF1 14°F 5°F	 ASU12RLF1 / AOU12RLF1 14°F 5°F		
Wall Mount Entry Level	 ASU9RL2 / AOU9RL2 15°F 15°F	 ASU12RL2 / AOU12RL2 15°F 15°F		
Floor Mount Highest SEER	 AGU9RLF / AOU9RLFF 14°F -5°F	 AGU12RLF / AOU12RLFF 14°F -5°F	 AGU15RLF / AOU15RLFF 14°F -5°F	
Floor Mount Highest SEER plus XLtH	 AGU9RLF / AOU9RLFFH 14°F -15°F	 AGU12RLF / AOU12RLFFH 14°F -15°F	 AGU15RLF / AOU15RLFFH 14°F -15°F	
Compact Cassette	 AAU9RLF / AOU9RLFC 14°F -5°F	 AAU12RLF / AOU12RLFC 14°F -5°F		
Slim Duct Horizontal/Vertical	 ARU9RLF / AOU9RLFC 14°F -5°F	 ARU12RLF / AOU12RLFC 14°F -5°F		
Universal Mount Floor/Ceiling				
Ceiling Suspended				
Large Cassette				









MULTI ZONE DUCTLESS HEAT PUMPS - INDOOR UNITS

BTU	7,000	9,000	12,000	15,000	18,000	24,000
Compact Wall Mount	 ASU7RLF1	 ASU9RLF1	 ASU12RLF1	 ASU15RLF1		
Large Wall Mount					 ASU18RLF	 ASU24RLF
Slim Duct	 ARU7RLF	 ARU9RLF	 ARU12RLF		 ARU18RLF	 ARU24RLF
Compact Cassette	 AAU7RLF	 AAU9RLF	 AAU12RLF		 AAU18RLF	
Floor Mount		 AGU9RLF	 AGU12RLF	 AGU15RLF		

Minimum Ambient Cooling Temperature:  Minimum Ambient Heating Temperature: 

	18,000	24,000	30,000	36,000	42,000
	 -5°F -15°F	 -5°F -15°F	 -5°F -15°F		
	 -5°F -5°F	 -5°F -5°F			
	 14°F 5°F	 14°F 5°F	 14°F 5°F	 14°F 5°F	
	 14°F -5°F				
	 14°F -5°F				
	 0°F 14°F	 0°F 14°F			
				 0°F 14°F	
	 0°F 14°F	 0°F 14°F		 0°F 14°F	 0°F 0°F

MULTI ZONE DUCTLESS HEAT PUMPS- OUTDOOR UNITS

BTU	18,000 (2 Indoor Units)	24,000 (2 - 3 Indoor Units)	36,000 (2* - 4 Indoor Units)	45,000 (2 - 5 Indoor Units)	48,000 (2 - 8 Indoor Units)
	 14°F 5°F	 14°F 5°F	 14°F 5°F	 14°F 5°F	 23°F 5°F
	 14°F -15°F	 14°F -15°F	 14°F -15°F		

* If AOU36RLXFZ1 is paired with two 18,000 BTU indoor units, you have to purchase optional kit Part #K9FZ1818.

+ The only combinations that qualify for ENERGY STAR® are:


AOU18RLXFZ with (2) ASU9RLF1
AOU18RLXFZ with (1) ASU7RLF1 + (1) ASU12RLF1
AOU18RLXFZ with (1) ASU9RLF1 + (1) ASU12RLF1

AOU18RLXFZH with (2) ASU9RLF1
AOU24RLXFZ with (2) ASU7RLF1 + (1) ASU9RLF1
AOU24RLXFZH with (2) ASU7RLF1 + (1) ASU9RLF1

AOU36RLXFZH with (4) ASU9RLF1


SINGLE-ZONE MINI-SPLIT SYSTEMS

Making the hottest places cool and the coolest places more comfortable

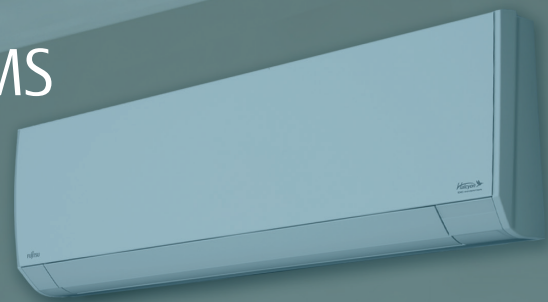

- Extensive lineup from 9,000 to 42,000 BTU
- 38 different systems available in 7 indoor unit styles
- Energy efficient systems with SEER ratings as high as 33.0 and HSPF as high as 14.2
- 25 ENERGY STAR® qualified systems
- Inverter Technology is used in all systems
- All systems feature environmentally friendly R410A refrigerant
- Quiet operation with indoor units as low as 21dB and outdoor units as low as 47dB

9, 12, 15,000 BTU_h WALL MOUNT HEAT PUMPS

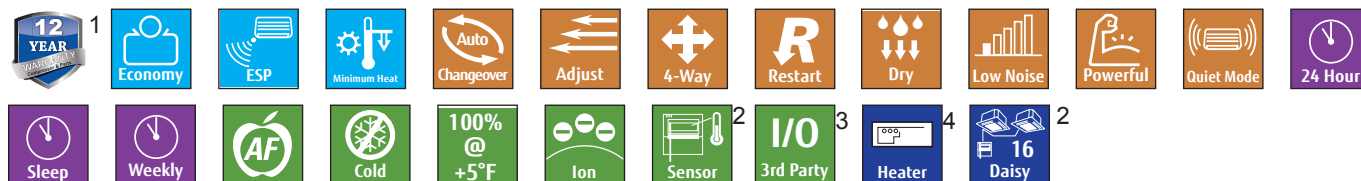

- 1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.
 2 Available only with optional wired Remote Control and optional interface kit.
 3 Available only with optional interface kit. Operation monitoring and On/Off control only.
 4 XLTH models only

ENERGY SAVING PROGRAM

These Halcyon systems know how to save you money even when you forget. If you leave the room without turning the unit off, ESP knows that you left and 20 minutes later, set temperature is increased by 4°F when cooling and reduced by 8°F when heating. When you come back to the room, it returns to previous operating mode. This prevents wasteful operation to save energy without you having to think about it. This feature can be deactivated if chosen.




HIGH PERFORMANCE HEATING

The RLS3Y model can operate down to -5°F. The RLS3YH can operate down to -15°F. See the full **XLTH** story on page 14.

BUILT-IN WI-FI

Remotely operate your heating and cooling system using a smartphone as a remote control. Details on page 12.

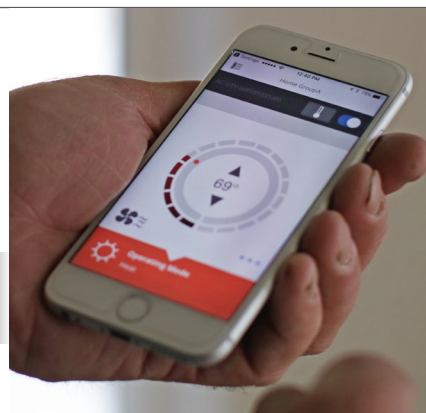

OPTIONAL ACCESSORIES

- Wired Remote Control: UTY-RVNUM
- Wired Remote Control: UTY-RNNUM
- Simple Remote Control: UTY-RSNUM
- Interface Kit: UTY-TWBXF1
- Dry Contact Wire Kit: UTY-XWZXZ5

SYSTEMS 9RLS3Y, 12RLS3Y, 15RLS3Y

HIGH HEAT SYSTEMS 9RLS3YH, 12RLS3YH, 15RLS3YH

UP TO 33.0 SEER



Performance					9RLS3Y		12RLS3Y		15RLS3Y		9RLS3YH		12RLS3YH		15RLS3YH		
Nominal Cooling	BTUh	9,000		12,000		14,500		9,000		12,000		14,500		9,000		14,500	
Min.-Max. Cooling	BTUh	3,100~12,000		3,100~13,600		3,100~18,400		3,100~12,000		3,100~13,600		3,100~18,400		3,100~12,000		3,100~18,400	
Nominal Heating	BTUh	12,000		16,000		18,000		12,000		16,000		18,000		12,000		18,000	
Min.-Max. Heating	BTUh	3,100~22,000		3,100~22,100		3,100~23,900		3,100~22,000		3,100~22,100		3,100~23,900		3,100~22,000		3,100~23,900	
SEER		33.0		29.3		25.3		33.0		29.3		25.3		33.0		29.3	
HSPF		14.2		14.0		13.4		14.0		13.8		13.3		14.0		13.3	
EER		18.0		15.2		13.9		18.0		15.2		13.9		18.0		15.2	
Cooling Operating Range	°F (°C)	14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)	
Heating Operating Range	°F (°C)	-5~75 (-21~24)		-5~75 (-21~24)		-5~75 (-21~24)		-15~75 (-26~24)		-15~75 (-26~24)		-15~75 (-26~24)		-15~75 (-26~24)		-15~75 (-26~24)	
Moisture Removal	Pt./h (l/h)	2.6 (1.2)		2.7 (1.3)		4.0 (1.9)		2.6 (1.2)		2.7 (1.3)		4.0 (1.9)		2.6 (1.2)		2.7 (1.3)	
Max Htg % of Model # Capacity at +5°F (-15°C)*		171%		138%		140%		171%		138%		140%		171%		138%	
Max Htg % of Model # Capacity at -5°F (-21°C)*		156%		125%		124%		156%		125%		124%		156%		125%	
Max Htg % of Model # Capacity at -15°F (-26°C)*		--		--		--		123%		98%		109%		123%		98%	
Fan																	
Air Circulation: Hi	CFM (m3/h)	489 (830)		489 (830)		547 (930)		489 (830)		489 (830)		547 (930)		489 (830)		547 (930)	
Medium	CFM (m3/h)	400 (680)		400 (680)		459 (780)		400 (680)		400 (680)		459 (780)		400 (680)		459 (780)	
Low	CFM (m3/h)	341 (580)		341 (580)		371 (630)		341 (580)		341 (580)		371 (630)		341 (580)		371 (630)	
Quiet	CFM (m3/h)	224 (380)		224 (380)		Clg 259 (440) Htg 294 (500)		224 (380)		224 (380)		Clg 259 (440) Htg 294 (500)		224 (380)		224 (380)	
Fan Speed Stage		4+Auto		4+Auto		4+Auto		4+Auto		4+Auto		4+Auto		4+Auto		4+Auto	
Sound																	
Indoor Level (Clg/Htg): Hi	dB(A)	42/41		42/41		45/45		42/41		42/41		45/45		42/41		45/45	
Medium	dB(A)	37/35		37/35		40/39		37/35		37/35		40/39		37/35		40/39	
Low	dB(A)	32/31		32/31		34/33		32/31		32/31		34/33		32/31		34/33	
Quiet	dB(A)	23/23		23/23		26/27		23/23		23/23		26/27		23/23		26/27	
Outdoor Level Clg/Htg	dB(A)	42/47		43/47		49/50		42/47		43/47		49/50		42/47		43/47	
Electrical																	
Voltage/Frequency/Phase		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1	
Circuit Breaker	Amps	15		15		20		15		15		20		15		20	
Current Rated/Max: Cooling	Amps	2.5/9.4		3.8/9.4		4.8/9.9		2.5/9.4		3.8/9.4		4.8/9.9		2.5/9.4		3.8/9.4	
Current Rated/Max: Heating	Amps	3.3/10.0		4.7/11.9		5.2/13.9		3.3/10.0		4.7/11.9		5.2/13.9		3.3/10.0		4.7/11.9	
Power Use Rated/Max: Cooling	kW	0.50/0.85		0.79/0.99		1.04/1.56		0.50/0.85		0.79/0.99		1.04/1.56		0.50/0.85		0.79/0.99	
Power Use Rated/Max: Heating	kW	0.66/1.93		1.01/1.94		1.15/2.19		0.66/1.93		1.01/1.94		1.15/2.19		0.66/1.93		1.01/1.94	
Size & Weight																	
Net Weight	lbs. (kg)	31 (14)	84 (38)	31 (14)	84 (38)	31 (14)	86 (39)	31 (14)	86 (39)	31 (14)	86 (39)	31 (14)	88 (40)	31 (14)	88 (40)	31 (14)	88 (40)
Dimensions: Height	Inch	11-5/8	24-7/16	11-5/8	24-7/16	11-5/8	24-7/16	11-5/8	24-7/16	11-5/8	24-7/16	11-5/8	24-7/16	11-5/8	24-7/16	11-5/8	24-7/16
	mm	295	620	295	620	295	620	295	620	295	620	295	620	295	620	295	620
Width	Inch	37	31-1/8	37	31-1/8	37	31-1/8	37	31-1/8	37	31-1/8	37	31-1/8	37	31-1/8	37	31-1/8
	mm	940	790	940	790	940	790	940	790	940	790	940	790	940	790	940	790
Depth	Inch	10-5/8	11-7/16	10-5/8	11-7/16	10-5/8	11-7/16	10-5/8	11-7/16	10-5/8	11-7/16	10-5/8	11-7/16	10-5/8	11-7/16	10-5/8	11-7/16
	mm	270	290	270	290	270	290	270	290	270	290	270	290	270	290	270	290
Refrigerant		R410A		R410A		R410A		R410A		R410A		R410A		R410A		R410A	
Additional Data																	
Air Direction: Horizontal		Automatic		Automatic		Automatic		Automatic		Automatic		Automatic		Automatic		Automatic	
Vertical		Automatic		Automatic		Automatic		Automatic		Automatic		Automatic		Automatic		Automatic	
Air Filter		Washable		Washable		Washable		Washable		Washable		Washable		Washable		Washable	
Minimum Lineset Length	Ft (m)	10 (3)		10 (3)		10 (3)		10 (3)		10 (3)		10 (3)		10 (3)		10 (3)	
Maximum Lineset Length	Ft (m)	66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')	
Max. Vertical Diff.	Ft (m)	49 (15)		49 (15)		49 (15)		49 (15)		49 (15)		49 (15)		49 (15)		49 (15)	
Lineset Size	Inch	Suc.3/8	Dis.1/4	Suc.3/8	Dis.1/4	Suc.1/2	Dis.1/4	Suc.3/8	Dis.1/4	Suc.3/8	Dis.1/4	Suc.3/8	Dis.1/4	Suc.1/2	Dis.1/4	Suc.1/2	Dis.1/4
* Based on model # capacity class (e.g. 9RLS3Y based on 9,000 BTUh) @ 70°F indoor setpoint. Refer to the Design & Technical Manual for more heating capacity data.		Indoor ASU9RLS3Y	Outdoor AO9RLS3Y	Indoor ASU12RLS3Y	Outdoor AO12RLS3Y	Indoor ASU15RLS3Y	Outdoor AO15RLS3Y	Indoor ASU9RLS3YH	Outdoor AO9RLS3YH	Indoor ASU12RLS3YH	Outdoor AO12RLS3YH	Indoor ASU15RLS3YH	Outdoor AO15RLS3YH	Indoor ASU9RLS3YH	Outdoor AO9RLS3YH	Indoor ASU12RLS3YH	Outdoor AO12RLS3YH

Note: Figures are based on 230 Volts.

9 AND 12,000 BTU_h WALL MOUNT HEAT PUMPS




1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.

2 Available only with optional wired remote control.

3 Available only with optional wired remote control and optional interface kit.

4 Available only with optional interface kit. Operation monitoring and On/Off control only.

BUILT IN FILTRATION




LONG-LIFE ION DEODORIZATION FILTER

The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine particle ceramic. The filter can be used for approximately 3 years if it is washed with water when dirty to restore its surface action.



APPLE-CATECHIN FILTER

Dust, mold spores and micro-organisms are absorbed onto the filter by static electricity and growth is inhibited and deactivated. Filter lasts 3-12 months.

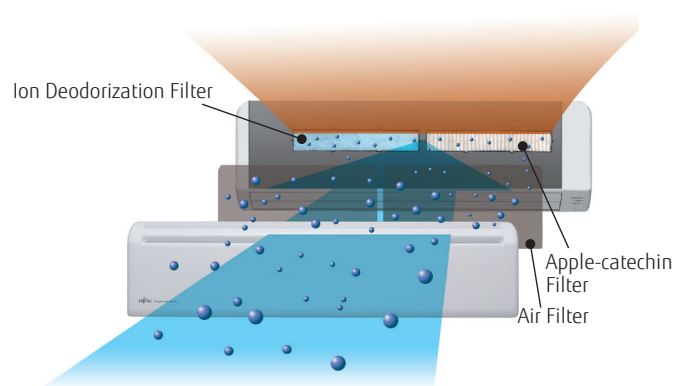

OPTIONAL ACCESSORIES

- Wired Remote Control: UTY-RVNUM*
- Wired Remote Control: UTY-RNNUM*
- Simple Remote Control: UTY-RSNUM*
- Dry Contact Wire Kit: UTY-XWZXZ5
- Interface Kit: UTY-XCBXZ2

* Wall mounted ASU9, 12RLF1 require accessory interface kit #UTY-XCBXZ2 in order to connect these devices to them.



HFI SYSTEMS 9RLFW1, 12RLFW1

UP TO 23 SEER

9RLFW1




12RLFW1



Performance		HFI		HFI	
Nominal Cooling	BTUh	9,000		12,000	
Min.-Max. Cooling	BTUh	1,700~10,900		3,100~13,300	
Nominal Heating	BTUh	12,000		16,000	
Min.-Max. Heating	BTUh	1,700~15,000		3,100~19,100	
SEER		23.0		22.0	
HSPF		11.0		11.0	
EER		13.8		12.5	
Cooling Operating Range	°F (°C)	14~115 (-10~46)		14~115 (-10~46)	
Heating Operating Range	°F (°C)	5~75 (-15~24)		5~75 (-15~24)	
Moisture Removal	Pt./h (l/h)	2.75 (1.3)		3.80 (1.8)	
Fan					
Air Circulation: Hi	CFM (m3/h)	441 (750)		441 (750)	
Medium	CFM (m3/h)	376 (640)		376 (640)	
Low	CFM (m3/h)	282 (480) Clg 306 (520) Htg		282 (480) Clg 306 (520) Htg	
Quiet	CFM (m3/h)	182 (310) Clg 194 (330) Htg		182 (310) Clg 194 (330) Htg	
Fan Speed Stage		4+Auto		4+Auto	
Sound					
Indoor Sound Level (Clg/Htg): Hi	dB(A)	43/43		43/43	
Medium	dB(A)	40/38		40/38	
Low	dB(A)	32/33		32/33	
Quiet	dB(A)	21/22		21/22	
Outdoor Sound Level Clg/Htg	dB(A)	48/48		49/49	
Electrical					
Voltage/Frequency/Phase		208-230/60/1		208-230/60/1	
Circuit Breaker	Amps	20		20	
Current Rated/Max: Cooling	Amps	3.2/6.0		4.4/6.5	
Current Rated: Heating	Amps	4.2/7.5		5.9/9.0	
Power Use Rated/Max: Cooling	kW	0.65/1.27		0.96/1.40	
Power Use Rated: Heating	kW	0.89/1.60		1.28/1.99	
Size & Weight					
Net Weight	lbs. (kg)	18 (8)	60 (27)	18 (8)	80 (36)
Dimensions: Height	Inch	10-1/2	21-1/4	10-1/2	21-1/4
	mm	268	540	268	540
Width	Inch	33-1/16	26	33-1/16	31
	mm	840	660	840	790
Depth	Inch	8	11-7/16	8	11-7/16
	mm	203	290	203	290
Refrigerant		R410A		R410A	
Additional Data					
Air Direction: Horizontal		Manual		Manual	
Vertical		Automatic		Automatic	
Air Filter		Washable		Washable	
Minimum Lineset Length	Ft (m)	10 (3)		10 (3)	
Maximum Lineset Length	Ft (m)	66 (20.1) (pre-charge: 49')		66 (20.1) (pre-charge: 49')	
Max. Vertical Diff.	Ft (m)	49 (15)		49 (15)	
Lineset Size	Inch	Suc. 3/8	Dis. 1/4	Suc. 3/8	Dis. 1/4
		Indoor ASU9RLF1	Outdoor AOU9RLFW1	Indoor ASU12RLF1	Outdoor AOU12RLFW1

Note: Figures are based on 230 Volts.

18 AND 24,000 BTU_h WALL MOUNT HEAT PUMPS

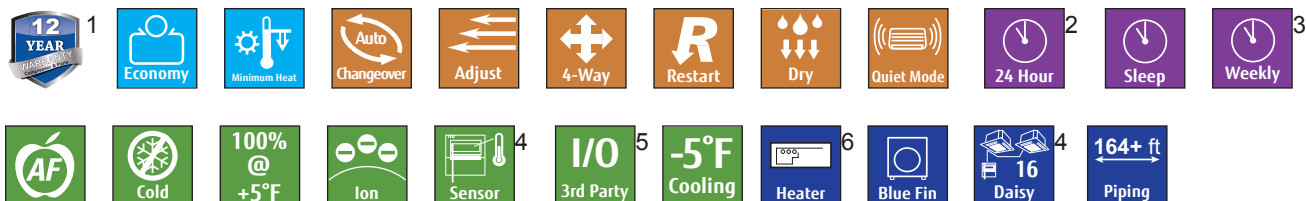

1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.

2 RLXFW1 systems only.

3 RLXFW1 systems require optional wired remote control.

4 Available only with optional wired remote control.


5 Available only with optional Interface kit. Operation monitoring and On/Off control only.

6 RLXFWH models only.

HIGH PERFORMANCE HEATING CAPACITY

Stay comfortable at low ambient temperatures! The RLXFW1 systems can deliver 100% or more of rated heating capacity at 5°F (-15°C) and operates down to -5°F (-21°C).

The RLXFWH model can operate down to -15°F. See the full **XLTH** story on page 14.

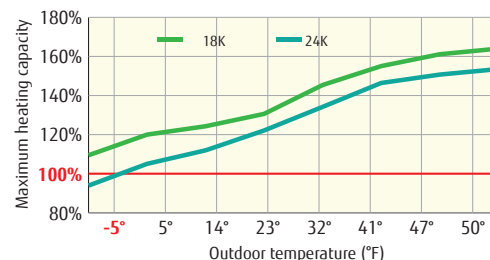


Based on 70° indoor setpoint

RLXFW1

OPTIONAL ACCESSORIES

- Wired Remote Control: UTY-RVNUM
- Wired Remote Control: UTY-RNNUM
- Simple Remote Control: UTY-RSNUM
- Dry Contact Wire Kit: UTY-XWZX

RLXFWH

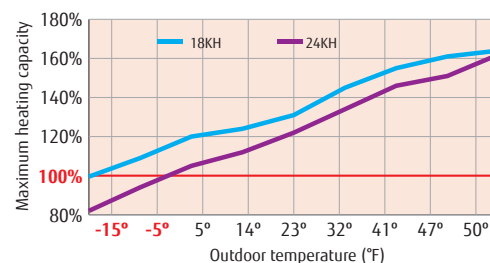





Based on 70° indoor setpoint



HFI SYSTEMS 18RLXFW1, 24RLXFW1

HIGH HEAT SYSTEMS 18RLXFWH, 24RLXFWH


UP TO 20 SEER

		18RLXFW1		24RLXFW1		18RLXFWH		24RLXFWH	
UP TO 20 SEER									
Performance		HFI		HFI		XLH		XLH	
Nominal Cooling	BTUh	18,000		22,000		18,000		22,000	
Min.-Max. Cooling	BTUh	7,000~23,000		9,900~27,300		7,000~23,000		9,900~27,300	
Nominal Heating	BTUh	21,600		25,200		21,600		25,200	
Min.-Max. Heating	BTUh	7,000~29,000		7,500~36,200		7,000~29,000		7,500~36,200	
SEER		20.0		19.5		20.0		19.5	
HSPF		10.5		10.6		10.4		10.5	
EER		13.3		12.5		13.3		12.5	
Cooling Operating Range	°F (°C)	-5~115 (-20~46)		-5~115 (-20~46)		-5~115 (-20~46)		-5~115 (-20~46)	
Heating Operating Range	°F (°C)	-5~75 (-20~24)		-5~75 (-20~24)		-15~75 (-26~24)		-15~75 (-26~24)	
Moisture Removal	Pt./h (l/h)	5.9 (2.8)		6.3 (3.0)		5.9 (2.8)		6.3 (3.0)	
Max Htg % of Model # Capacity at +5°F (-15°C)*		120%		105%		120%		105%	
Max Htg % of Model # Capacity at -5°F (-21°C)*		109%		94%		109%		94%	
Max Htg % of Model # Capacity at -15°F (-26°C)*		-		-		100%		82%	
Fan									
Air Circulation: Hi	CFM (m3/h)	541 (920)		Clg 659 (1,120) Htg 677 (1,150)		541 (920)		Clg 659 (1,120) Htg 677 (1,150)	
Medium	CFM (m3/h)	435 (740)		530 (900)		435 (740)		530 (900)	
Low	CFM (m3/h)	365 (620)		435 (740)		365 (620)		435 (740)	
Quiet	CFM (m3/h)	Clg 306 (520) Htg 318 (540)		365 (620)		Clg 306 (520) Htg 318 (540)		365 (620)	
Fan Speed Stage		4+Auto		4+Auto		4+Auto		4+Auto	
Sound									
Indoor Level (Clg/Htg): Hi	dB(A)	43/44		49/49		43/44		49/49	
Medium	dB(A)	37/37		42/42		37/37		42/42	
Low	dB(A)	33/33		37/37		33/33		37/37	
Quiet	dB(A)	28/28		33/33		28/28		33/33	
Outdoor Level Clg/Htg	dB(A)	47/50		54/55		47/50		54/55	
Electrical									
Voltage/Frequency/Phase		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1	
Circuit Breaker	Amps	20		30		20		20	
Current Rated/Max: Cooling	Amps	6.2/13.5		7.9/15.0		6.2/13.5		7.9/15	
Current Rated/Max: Heating	Amps	7.8/14.5		8.6/15.5		7.8/14.5		8.6/15.5	
Power Use Rated/Max: Cooling	kW	1.35/3.01		1.76/3.42		1.35/3.01		1.76/3.42	
Power Use Rated/Max: Heating	kW	1.80/3.23		2.38/3.53		1.75/3.23		1.94/3.53	
Size & Weight									
Net Weight	lbs. (kg)	31 (14)	134 (61)	31 (14)	134 (61)	31 (14)	135 (61)	31 (14)	135 (61)
Dimensions: Height	Inch	12-5/8	32-3/4	12-5/8	32-3/4	12-5/8	32-3/4	12-5/8	32-3/4
	mm	320	830	320	830	320	830	320	830
Width	Inch	39-1/4	35-3/8	39-1/4	35-3/8	39-1/4	35-3/8	39-1/4	35-3/8
	mm	998	900	998	900	998	900	998	900
Depth	Inch	9	13	9	13	9	13	9	13
	mm	228	330	228	330	228	330	228	330
Refrigerant		R410A		R410A		R410A		R410A	
Additional Data									
Air Direction: Horizontal		Automatic		Automatic		Automatic		Automatic	
Vertical		Automatic		Automatic		Automatic		Automatic	
Air Filter		Washable		Washable		Washable		Washable	
Minimum Lineset Length	Ft (m)	16 (5)		16 (5)		16 (5)		16 (5)	
Maximum Lineset Length	Ft (m)	164 (50) (pre-charge: 66')		164 (50) (pre-charge: 66')		164 (50) (pre-charge: 65')		164 (50) (pre-charge: 65')	
Max. Vertical Diff.	Ft (m)	98 (30)		98 (30)		30 (98)		30 (98)	
Lineset Size	Inch	Suc. 5/8	Dis. 3/8	Suc. 5/8	Dis. 3/8	Suc. 5/8	Dis. 3/8	Suc. 5/8	Dis. 3/8
* Based on model # capacity class (e.g. 9RLS3Y based on 9,000 BTUh) @ 70°F indoor setpoint. Refer to the Design & Technical Manual for more heating capacity data.		Indoor ASU18RLF	Outdoor AOU18RLXFW1	Indoor ASU24RLF	Outdoor AOU24RLXFW1	Indoor ASU18RLF	Outdoor AOU18RLXFWH	Indoor ASU24RLF	Outdoor AOU24RLXFWH

* Based on model # capacity class (e.g. 9RLS3Y based on 9,000 BTUh) @ 70°F indoor setpoint. Refer to the Design & Technical Manual for more heating capacity data.

Note: Figures are based on 230 Volts.

30,000 BTU_h WALL MOUNT HEAT PUMP

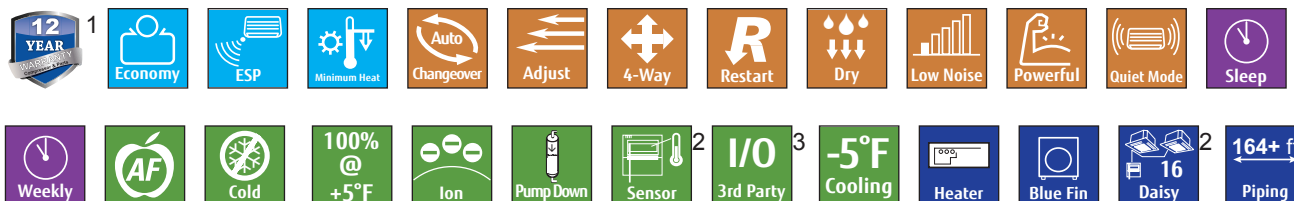

1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.

2 Available only with optional wired remote control.

3 Available only with optional Interface kit.

EXTENDED LINESET

Long piping lengths between indoor and outdoor units provides flexibility and increased applications.

SERVER ROOM MODE

Server rooms can generate a tremendous amount of heat, and require cooling 24 hours a day. The strain of such a heat load is best handled with a redundant cooling system. Pairing two 30RLXEH systems together in Server Room Mode offers a unique solution for keeping network servers cool.

Two 30RLXEH systems can be set up to work together in Lead Lag[^] operation:

- Alternative Operation – units alternate operation, so neither unit is running at the same time.
- Backup Operation – if an error occurs on one unit, the second unit will turn on.
- Supporting Operation – if the setpoint cannot be reached with one unit alone, the second unit will come on to satisfy the demand for cooling.

[^] Wired remotes cannot be used when using this feature. This includes UTY-RNRUZ1, UTY-RVNUM, UTY-RNNUM, UTY-RSNUM.


LOCK OUT FUNCTION

This feature is set by the contractor on behalf of the Commercial Property Owner to prevent either Cooling or Heating operation from occurring. This is not a function that can be set by a tenant, user, or home owner.

HIGH PERFORMANCE HEATING CAPACITY

The RLXEH model can operate down to -15°F. See the full **XLTH** story on page 14.

MAX PIPE LENGTH
System 30RLXEH
246 ft. (75m)



Max Height Diff.
98 ft.
(30m)

ADDITIONAL APPLICATIONS THAT MAY REQUIRE LOW AMBIENT COOLING:

- Conference/Meeting/Training Rooms
- Social Gathering spots
- Places of Worship

OPTIONAL ACCESSORIES

- Wired Touch Panel Remote Controller: UTY-RNRUZ1[^]
- Wired Remote Control: UTY-RVNUM[^]
- Wired Remote Control: UTY-RNNUM[^]
- Simple Remote Control: UTY-RSNUM[^]
- Dry Contact Wire Kit: UTY-XWZX
- Interface Kit: UTY-XCSXZ1
- Interface Kit Box: UTZ-GXXB
- Outdoor Unit Input/Output Connector: UTY-XWZXZ3

The 30RLXEH is specially engineered for spaces such as server rooms which require constant cool temperatures year round, and rooms that hold a large number of people (meeting spaces, classrooms, conference rooms).


HIGH-HEAT SYSTEM 30RLXEH

UP TO 18.7 SEER

30RLXEH



XLH

Performance			
Nominal Cooling	BTUh	30,000	
Min.-Max. Cooling	BTUh	9,900~32,400	
Nominal Heating	BTUh	32,000	
Min.-Max. Heating	BTUh	8,000~37,500	
SEER		18.7	
HSPF		11.7	
EER		12.5	
Cooling Operating Range	°F (°C)	-5~115 (-20~46)	
Heating Operating Range	°F (°C)	-15~75 (-26~24)	
Moisture Removal	Pt./h (l/h)	9.7 (4.6)	
Max Htg % of Model # Capacity at +5°F (-15°C)*		107%	
Max Htg % of Model # Capacity at -5°F (-21°C)*		91%	
Max Htg % of Model # Capacity at -15°F (-26°C)*		76%	
Fan			
Air Circulation: Hi	CFM (m3/h)	812 (1,380)	
Medium	CFM (m3/h)	665 (1,130)	
Low	CFM (m3/h)	536 (910)	
Quiet	CFM (m3/h)	418 (710)	
Fan Speed Stage		4+Auto	
Sound			
Indoor Sound Level (Clg/Htg): Hi	dB(A)	50/49	
Medium	dB(A)	45/44	
Low	dB(A)	38/38	
Quiet	dB(A)	32/32	
Outdoor Sound Level Clg/Htg	dB(A)	53/54	
Electrical			
Voltage/Frequency/Phase		208-230/60/1	
Circuit Breaker	Amps	30	
Current Rated: Cooling	Amps	10.6	
Current Rated: Heating	Amps	12.0	
Power Use Rated/Max: Cooling	kW	2.40/3.83	
Power Use Rated/Max: Heating	kW	2.74/4.28	
Size & Weight			
Net Weight	lbs. (kg)	40 (18)	205 (93)
Dimensions: Height	Inch	13-3/8	50-13/16
	mm	340	1,290
Width	Inch	45-1/4	35-3/8
	mm	1,150	900
Depth	Inch	11	13
	mm	280	330
Refrigerant		R410A	
Additional Data			
Air Direction: Horizontal		Automatic	
Vertical		Automatic	
Air Filter		Washable	
Minimum Lineset Length	Ft (m)	16 (5)	
Maximum Lineset Length	Ft (m)	246 (75) (pre-charge: 65')	
Max. Vertical Diff.	Ft (m)	30 (98)	
Lineset Size	Inch	Suc. 5/8	Dis. 3/8
*Based on model # capacity class (e.g. 9RLS3Y based on 9,000 BTUh) @ 70°F indoor setpoint. Refer to the Design & Technical Manual for more heating capacity data.		Indoor ASU30RLEH	Outdoor AOU30RLEH
Note: Figures are based on 230 Volts			

Note: Figures are based on 230 Volts.

9 AND 12,000 BTU_h, 115V, WALL MOUNT HEAT PUMPS



1



1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in residence. See full warranty for details.

FUNCTION

Stylish, slim and elegant, these popular wall mounted units are designed for single rooms. Indoor units have a clean, aesthetic design and are small but mighty and shorter in length than competing units, helping them blend into any room.

EASY MAINTENANCE

Front panel is easily removed for cleaning.

APPLICATIONS

This category of equipment is ideal for smaller spaces where spot cooling or heating is required. Residential applications including sunrooms and additions are made easier with these 115 volt heat pumps. Do you have a warm or cool spot in your home? Fujitsu mini-splits can provide extra cooling or heating capacity for those hard to cool areas. Commercially, their small size makes them ideal for small offices, providing individual temperature control.



SYSTEMS 9RL2, 12RL2

16.0 SEER		9RL2		12RL2	
Performance					
Nominal Cooling	BTUh	9,000		12,000	
Min.-Max. Cooling	BTUh	1,700~10,700		3,100~12,500	
Nominal Heating	BTUh	10,000		14,000	
Min.-Max. Heating	BTUh	1,700~12,000		3,100~16,000	
SEER		16.0		16.0	
HSPF		9.0		9.0	
EER		10.8		10.0	
Cooling Operating Range	°F (°C)	15~115 (-10~46)		15~115 (-10~46)	
Heating Operating Range	°F (°C)	15~75 (-10~24)		15~75 (-10~24)	
Moisture Removal	Pt./h (l/h)	2.7 (1.3)		3.8 (1.8)	
Fan					
Air Circulation: Hi	CFM (m3/h)	436 (740)		436 (740)	
Medium	CFM (m3/h)	353 (600)		353 (600)	
Low	CFM (m3/h)	265 (450)		265 (450)	
Quiet	CFM (m3/h)	191 (325)		191 (325)	
Fan Speed Stage		4 + Auto		4 + Auto	
Sound					
Indoor Sound Level (Clg/Htg): Hi	dB(A)	43/43		43/43	
Medium	dB(A)	38/38		38/38	
Low	dB(A)	33/33		33/33	
Quiet	dB(A)	23/23		23/23	
Outdoor Sound Level Clg/Htg	dB(A)	47/48		51/51	
Electrical					
Voltage/Frequency/Phase		115/60/1		115/60/1	
Circuit Breaker	Amps	15		20	
Current Rated: Cooling	Amps	7.5		10.9	
Current Rated: Heating	Amps	7.0		11.0	
Power Use Rated: Cooling	kW	0.83		1.20	
Power Use Rated: Heating	kW	0.77		1.21	
Size & Weight					
Net Weight	lbs. (kg)	16 (7)	64 (29)	16 (7)	69 (31)
Dimensions: Height	Inch	10-5/16	21-1/4	10-5/16	21-1/4
	mm	262	540	262	540
Width	Inch	32-9/32	26	32-9/32	26
	mm	820	660	820	660
Depth	Inch	8-1/8	11-11/32	8-1/8	11-11/32
	mm	206	290	206	290
Refrigerant		R410A		R410A	
Additional Data					
Air Direction: Horizontal		Manual		Manual	
Vertical		Automatic		Automatic	
Air Filter		Washable		Washable	
Minimum Lineset Length	Ft (m)	10 (3)		10 (3)	
Maximum Lineset Length	Ft (m)	66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')	
Max. Vertical Diff.	Ft (m)	49 (15)		49 (15)	
Lineset Diameter	Inch	Suc. 3/8	Dis. 1/4	Suc. 3/8	Dis. 1/4
		Indoor ASU9RL2	Outdoor AOU9RL2	Indoor ASU12RL2	Outdoor AOU12RL2

Note: Figures are based on 115 Volts.

18, 24, 30, 36,000 BTU_h WALL MOUNT HEAT PUMPS



AOU18RLB
AOU24RLB



AOU30RLXB
AOU36RLXB



1



2



1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.

2 Available only with optional wired remote control.

3 Available only with optional Interface kit.

4 RLXB models only.

FUNCTION

Stylish, slim and elegant, these wall mounted ductless heat pumps are designed for single rooms. Ideal for spaces requiring additional capacity but are limited on space. With more efficient zone control, ductless mini-splits are perfect for renovations, restorations, conversions, and add-ons.

LOCK OUT FUNCTION

This feature is set by the contractor on behalf of the Commercial Property Owner to prevent either Cooling or Heating operation from occurring. This is not a function that can be set by a tenant, user, or home owner.

OPTIONAL ACCESSORIES

- Wired Remote Control: UTY-RVNUM
- Wired Remote Control: UTY-RNNUM
- Simple Remote Control: UTY-RSNUM
- Dry Contact Wire Kit: UTY-XWZX



SYSTEMS 18RLB, 24RLB, 30RLXB, 36RLXB

UP TO 19.0 SEER



24RLB


30RLXB

36RLXB

Performance		18RLB		24RLB		30RLXB		36RLXB	
Nominal Cooling	BTUh	18,000		24,000		30,000		33,000	
Min.-Max. Cooling	BTUh	3,100~19,000		3,100~25,000		9,900~32,400		9,900~34,100	
Nominal Heating	BTUh	18,000		24,000		30,000		34,000	
Min.-Max. Heating	BTUh	7,000~20,000		7,500~27,000		8,000~33,000		10,200~35,000	
SEER		19.0		18.0		16.5		15.5	
HSPF		10.6		10.6		9.0		9.0	
EER		12.5		10.0		9.5		8.5	
Cooling Operating Range	°F (°C)	14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)	
Heating Operating Range	°F (°C)	5~75 (-15~24)		5~75 (-15~24)		5~75 (-15~24)		5~75 (-15~24)	
Moisture Removal	Pt./h (l/h)	4.0 (1.9)		6.3 (3.0)		9.7 (4.6)		10.1 (4.8)	
Fan		18RLB		24RLB		30RLXB		36RLXB	
Air Circulation: Hi	CFM (m3/h)	542 (920)		659 (1,120) Clg 647 (1,100) Htg		659 (1,120) Clg 677 (1,150) Htg		695 (1,180)	
Medium	CFM (m3/h)	439 (740)		530 (900)		530 (900)		530 (900)	
Low	CFM (m3/h)	365 (620)		436 (740)		436 (740)		436 (740)	
Quiet	CFM (m3/h)	306 (520)		365 (620)		365 (620)		365 (620)	
Fan Speed Stage		4+Auto		4+Auto		4+Auto		4+Auto	
Sound		18RLB		24RLB		30RLXB		36RLXB	
Indoor Sound Level (Clg/Htg): Hi	dB(A)	42/43		47/47		47/49		50/50	
Medium	dB(A)	35/36		41/42		42/42		42/42	
Low	dB(A)	31/33		35/36		37/37		37/37	
Quiet	dB(A)	26/28		31/33		32/33		32/33	
Outdoor Sound Level Clg/Htg	dB(A)	51/50		54/55		52/55		52/55	
Electrical		18RLB		24RLB		30RLXB		36RLXB	
Voltage/Frequency/Phase		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1	
Circuit Breaker	Amps	15		20		30		30	
Current Rated/Max: Cooling	Amps	6.4/8.3		10.5/11.8		13.8/16.8		17.0/18.0	
Current Rated/Max: Heating	Amps	5.8/11.8		8.5/13.8		12.3/18.8		14.8/18.8	
Power Use Rated: Cooling	kW	1.44/1.89		2.40/2.69		3.16/3.83		3.88/4.10	
Power Use Rated: Heating	kW	1.29/2.69		1.93/3.14		2.80/4.28		3.39/4.28	
Size & Weight		18RLB		24RLB		30RLXB		36RLXB	
Net Weight	lbs. (kg)	31 (14)	86 (39)	31 (14)	86 (39)	31 (14)	134 (61)	31 (14)	134 (61)
Dimensions: Height	Inch	12-5/8	24-7/16	12-5/8	24-7/16	12-5/8	32-11/16	12-5/8	32-11/16
	mm	320	620	320	620	320	830	320	830
Width	Inch	39-5/16	31-1/8	39-5/16	31-1/8	39-5/16	35-7/16	39-5/16	35-7/16
	mm	998	790	998	790	998	900	998	900
Depth	Inch	9	11-7/16	9	11-7/16	9	13	9	13
	mm	228	290	228	290	228	330	228	330
Refrigerant		R410A		R410A		R410A		R410A	
Additional Data		18RLB		24RLB		30RLXB		36RLXB	
Air Direction: Horizontal		Automatic		Automatic		Automatic		Automatic	
Vertical		Automatic		Automatic		Automatic		Automatic	
Air Filter		Washable		Washable		Washable		Washable	
Minimum Piping Length	Ft (m)	10 (3)		10 (3)		16 (5)		16 (5)	
Maximum Piping Length	Ft (m)	66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		165 (50) (pre-charge: 66')		165 (50) (pre-charge: 66')	
Maximum Vertical Differential	Ft (m)	49 (15)		49 (15)		98 (30)		98 (30)	
Lineset Size	Inch	Suc.1/2	Dis.1/4	Suc.1/2	Dis.1/4	Suc.5/8	Dis.3/8	Suc.5/8	Dis.3/8
		Indoor ASU18RLB	Outdoor AOU18RLB	Indoor ASU24RLB	Outdoor AOU24RLB	Indoor ASU30RLXB	Outdoor AOU30RLXB	Indoor ASU36RLXB	Outdoor AOU36RLXB

Note: Figures are based on 230 Volts.

9, 12, 15,000 BTU_h FLOOR MOUNT HEAT PUMPS

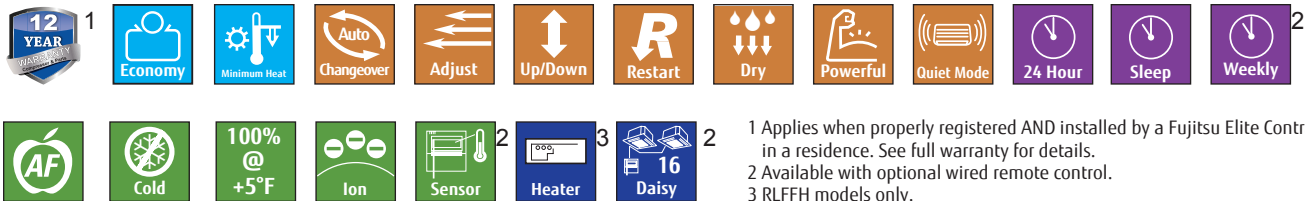

1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.
2 Available with optional wired remote control.
3 RLFFH models only.

IDEAL RADIATOR REPLACEMENT



At less than 24" high and 30" wide, floor mount models fit easily under a standard window and can replace a radiator twice its size while producing more capacity.

BASE PAN HEATER (RLFFH MODELS)



RLFF models can operate down to -5°F. RLFFH models can operate down to -15°F. See the full **XLTH** story on page 14.

OPTIONAL ACCESSORIES

- Wired Remote Control: UTY-RVNUM
- Wired Remote Controller: UTY-RNNUM
- Simple Remote Control: UTY-RSNUM
- Dry Contact Wire Kit: UTY-XWZXZ5

TWO FANS AND WIDE AIRFLOW


Having both upper and lower airflow quickly warms or cools the entire room. Floor mount can be set in "Upward Airflow Only" when occupants wish not to have feet warmed or cooled.

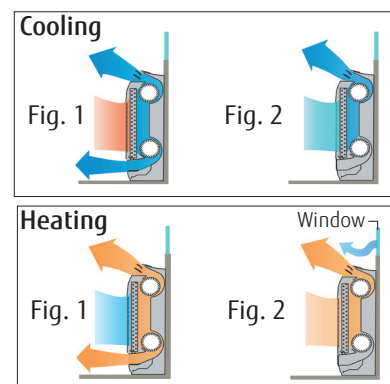

- Cooling**
1. Upon startup, both top and bottom louvers open.
 2. As the room temperature nears the setpoint, only the top louver stays open to help prevent cold air from falling.

- Heating**
1. Upon startup, both top and bottom louvers open.
 2. Closer to setpoint, only the top louver stays open to help prevent cold drafts from windows.

FLEXIBLE AND EASY INSTALLATION

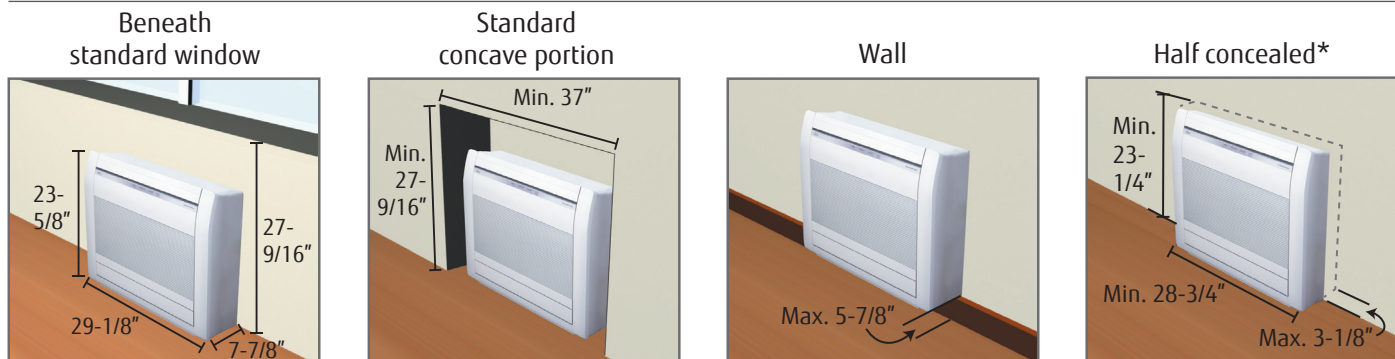







*Field supplied insulation required

HFI SYSTEMS 9RLFF, 12RLFF, 15RLFF

HIGH HEAT SYSTEMS 9RLFFH, 12RLFFH, 15RLFFH

UP TO 26 SEER

UP TO 26 SEER		 9RLFF		 12RLFF		 15RFF		 9RLFFH		 12RLFFH		 15RLFFH	
Performance		HFI		HFI		HFI		XLH		XLH		XLH	
Nominal Cooling	BTUh	9,000		12,000		14,200		9,000		12,000		14,200	
Min.-Max. Cooling	BTUh	3,100~13,000		3,100~14,300		3,100~17,700		3,100~13,000		3,100~14,300		3,100~17,700	
Nominal Heating	BTUh	12,000		16,000		18,000		12,000		16,000		18,000	
Min.-Max. Heating	BTUh	3,100~18,800		3,100~22,100		3,100~23,900		3,100~18,800		3,100~19,500		3,100~20,800	
SEER		26.0		22.7		20.3		26.0		22.7		20.3	
HSPF		12.6		11.6		11.2		12.4		11.3		11.0	
EER		16.0		13.1		12.5		16.0		13.1		12.5	
Cooling Operating Range	°F (°C)	14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)		14~115 (-10~46)	
Heating Operating Range	°F (°C)	-5~75 (-21~24)		-5~75 (-21~24)		-5~75 (-21~24)		-15~75 (-26~24)		-15~75 (-26~24)		-15~75 (-26~24)	
Moisture Removal	Pt./h (l/h)	2.75 (1.3)		3.8 (1.8)		4.44 (2.1)		2.75 (1.3)		3.8 (1.8)		4.44 (2.1)	
Max Htg % of Model # Capacity at +5°F (-15°C)*		149%		125%		118%		149%		125%		118%	
Max Htg % of Model # Capacity at -5°F (-21°C)*		130%		111%		107%		130%		111%		107%	
Max Htg % of Model # Capacity at -15°F (-26°C)*		--		--		--		115%		100%		96%	
Fan													
Air Circulation: Hi	CFM (m3/h)	335 (570)		335 (570)		383 (650)		335 (570)		335 (570)		383 (650)	
Medium	CFM (m3/h)	271 (460)		271 (460)		306 (520)		271 (460)		271 (460)		306 (520)	
Low	CFM (m3/h)	212 (360)		212 (360)		235 (400)		212 (360)		212 (360)		235 (400)	
Quiet	CFM (m3/h)	159 (270)		159 (270)		159 (270)		159 (270)		159 (270)		159 (270)	
Fan Speed Stage		4+Auto		4+Auto		4+Auto		4+Auto		4+Auto		4+Auto	
Sound													
Indoor Level (Clg/Htg): Hi	dB(A)	40/40		40/40		44/43		40/40		40/40		44/43	
Medium	dB(A)	35/35		35/35		38/37		35/35		35/35		38/37	
Low	dB(A)	29/29		29/29		31/29		29/29		29/29		31/29	
Quiet	dB(A)	23/23		23/23		23/23		23/23		23/23		23/23	
Outdoor Level Clg/Htg	dB(A)	50/50		52/52		54/54		50/50		52/52		54/54	
Electrical													
Voltage/Frequency/Phase		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1	
Circuit Breaker	Amps	15		15		20		15		15		20	
Current Rated: Cooling	Amps	2.9		4.2		5.1		2.9		4.2		5.1	
Current Rated: Heating	Amps	4.1		6.7		7.0		4.1		6.7		7.0	
Power Use Rated: Cooling	kW	.56		.97		1.13		.56		.97		1.13	
Power Use Rated: Heating	kW	.88		1.44		1.58		.88		1.44		1.58	
Size & Weight													
Net Weight	lbs. (kg)	31 (14)	84 (38)	31 (14)	84 (38)	31 (14)	86 (39)	31 (14)	86 (39)	31 (14)	86 (39)	31 (14)	88 (40)
Dimensions: Height	Inch	23-5/8	24-7/16	23-5/8	24-7/16	23-5/8	24-7/16	23-5/8	24-7/16	23-5/8	24-7/16	23-5/8	24-7/16
	mm	600	620	600	620	600	620	600	620	600	620	600	620
Width	Inch	29-1/8	31-1/8	29-1/8	31-1/8	29-1/8	31-1/8	29-1/8	31-1/8	29-1/8	31-1/8	29-1/8	31-1/8
	mm	740	790	740	790	740	790	740	790	740	790	740	790
Depth	Inch	7-7/8	11-7/16	7-7/8	11-7/16	7-7/8	11-7/16	7-7/8	11-7/16	7-7/8	11-7/16	7-7/8	11-7/16
	mm	200	290	200	290	200	290	200	290	200	290	200	290
Refrigerant		R410A		R410A		R410A		R410A		R410A		R410A	
Additional Data													
Air Direction: Horizontal		Manual		Manual		Manual		Manual		Manual		Manual	
Vertical		Auto		Auto		Auto		Auto		Auto		Auto	
Air Filter		Washable		Washable		Washable		Washable		Washable		Washable	
Minimum Lineset Length	Ft (m)	10 (3)		10 (3)		10 (3)		10 (3)		10 (3)		10 (3)	
Maximum Lineset Length	Ft (m)	66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')		66 (20) (pre-charge: 49')	
Max. Vertical Differential	Ft (m)	49 (15)		49 (15)		49 (15)		49 (15)		49 (15)		49 (15)	
Lineset Size	Inch	Suc. 3/8	Dis. 1/4	Suc. 3/8	Dis. 1/4	Suc. 1/2	Dis. 1/4	Suc. 3/8	Dis. 1/4	Suc. 3/8	Dis. 1/4	Suc. 1/2	Dis. 1/4
* Based on model # capacity class (e.g. 9RLS3Y based on 9,000 BTUh) @ 70°F indoor setpoint. Refer to the Design & Technical Manual for more heating capacity data.		Indoor AGU9RLF	Outdoor AOU9RLFF	Indoor AGU12RLF	Outdoor AOU12RLFF	Indoor AGU15RLF	Outdoor AOU15RLFF	Indoor AGU9RLF	Outdoor AOU9RLFFH	Indoor AGU12RLF	Outdoor AOU12RLFFH	Indoor AGU15RLF	Outdoor AOU15RLFFH


* Based on model # capacity class (e.g. 9RLS3Y based on 9,000 BTUh) @ 70°F indoor setpoint. Refer to the Design & Technical Manual for more heating capacity data.

Note: Figures are based on 230 Volts.

9, 12, 18,000 BTUh COMPACT CASSETTE HEAT PUMPS



Compact Cassette Grille UTG-CCGF shown is sold separately and must be ordered with each compact cassette.

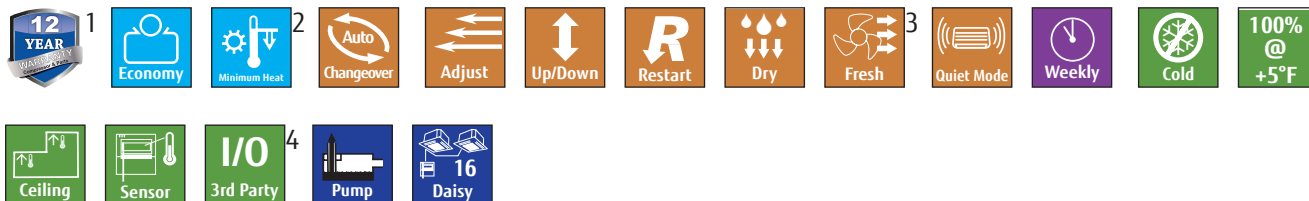


- 1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.
- 2 Available only with optional wireless remote control.
- 3 Requires Fujitsu's Optional Fresh Air Kit part #UTZ-VXAA. Allows for a 4-inch flex duct connection. Requires a field supplied duct booster fan capable of 60 CFM at .2"W.C. or 90 CFM at .4"W.C. For fan static pressure requirements, see installation manual. Add hood, filter and duct losses for fan total static pressure requirements. Will add 4" to the height of the indoor unit.
- 4 Available only with optional Interface kit. Operation monitoring and On/Off control only.

FUNCTION

Compact cassettes provide comfort cooling or heating for small room applications. Features include high efficiency up to 24.0 SEER, heating at low temperatures down to -5°F, compact design, quiet operation, a standard wired remote control, and the ability to bring in fresh air through the optional Fresh Air Kit.

EASY INSTALLATION


Fits into a standard ceiling tile*.

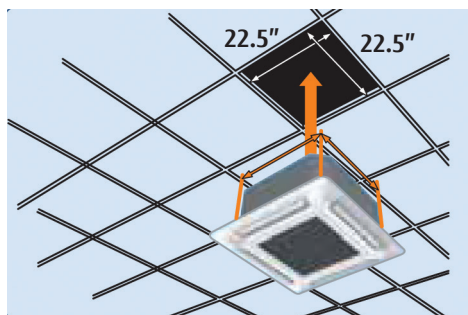

*Dimensions of outer grille are 27-9/16" x 27-9/16" and may overlap adjacent tiles.

2-STAGE TURBO FAN


Air distribution is evenly spread across the heat exchanger by the 2 stage turbo fan which produces two separate airflow streams.

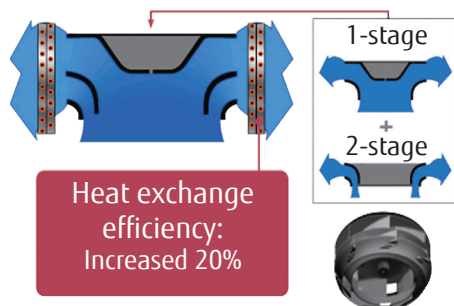

QUIET OPERATION


Optimization of wing form (laminar wing design) and number of wings (7 blades) enables as low as 27 dB.

Designed by CFD-analysis (fluid) simulations

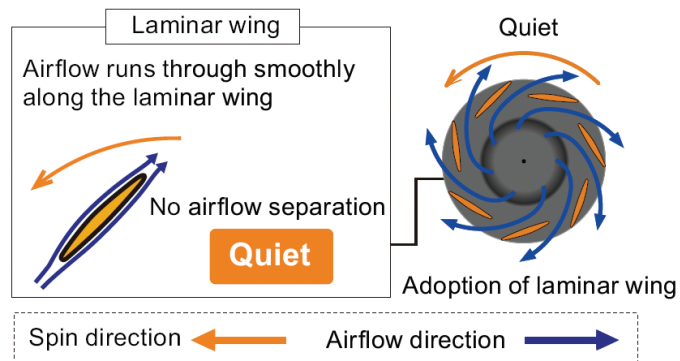

OPTIONAL ACCESSORIES

- Wired Remote Control: UTY-RVNUM
- Wireless remote UTY-LNHU
- Fresh Air Kit³ UTZ-VXAA
Mixes room air which then passes through the heat exchanger.



HFI SYSTEMS 9RLFCC, 12RLFCC, 18RLFCC

UP TO 24.0 SEER

9RLFCC



12RLFCC




18RLFCC

Performance		HFI			HFI			HFI		
Nominal Cooling	BTUh	9,000			12,000			18,000		
Min.-Max. Cooling	BTUh	3,100~12,000			3,100~13,600			3,100~20,100		
Nominal Heating	BTUh	12,000			16,000			21,600		
Min.-Max. Heating	BTUh	3,100~18,000			3,100~19,400			3,100~25,600		
SEER		24.0			21.9			20.1		
HSPF		13.0			12.2			11.5		
EER		14.5			12.8			11.2		
Cooling Operating Range	°F (°C)	14~115 (-10~46)			14~115 (-10~46)			14~115 (-10~46)		
Heating Operating Range	°F (°C)	-5~75 (-21~24)			-5~75 (-21~24)			-5~75 (-21~24)		
Moisture Removal	Pt./h (l/h)	1.3 (.06)			2.5 (1.2)			4.6 (2.2)		
Fan										
Air Circulation: Hi	CFM (m3/h)	318 (540) Clg or Htg			359 (610) Clg or Htg			400 (680) Clg 471 (800) Htg		
Medium	CFM (m3/h)	288 (490) Clg or Htg			312 (530) Clg or Htg			341 (580) Clg 400 (680) Htg		
Low	CFM (m3/h)	259 (440) Clg or Htg			277 (470) Clg or Htg			288 (490) Clg 341 (580) Htg		
Quiet	CFM (m3/h)	230 (390) Clg or Htg			241 (410) Clg or Htg			241 (410) Clg 265 (450) Htg		
Fan Speed Stage		4+auto			4+auto			4+auto		
Sound										
Indoor Sound Level (Clg/Htg): Hi	dB(A)	33/34			37/37			40/44		
Medium	dB(A)	32/32			33/33			36/40		
Low	dB(A)	29/29			31/31			32/36		
Quiet	dB(A)	28/27			28/28			28/30		
Outdoor Sound Level Clg/Htg	dB(A)	48/49			49/50			54/55		
Electrical										
Voltage/Frequency/Phase		208-230/60/1			208-230/60/1			208-230/60/1		
Circuit Breaker	Amps	15			15			20		
Current Rated: Cooling	Amps	3.0			4.4			7.1		
Current Rated: Heating	Amps	4.1			6.7			7.7		
Power Use Rated/Max: Cooling	kW	0.62/1.40			0.94/1.45			1.61/2.15		
Power Use Rated/Max: Heating	kW	0.89/1.80			1.44/2.00			1.76/2.60		
Size & Weight										
Net Weight	lbs. (kg)	33 (15)		84 (38)	33 (15)		84 (38)	33 (15)		86 (39)
Dimensions: Height	Inch	9-11/16	1-15/16	24-1/2	9-11/16	1-15/16	24-1/2	9-11/16	1-15/16	24-1/2
	mm	245	49	620	245	49	620	245	49	620
Width	Inch	22-7/16	27-9/16	31-3/32	22-7/16	27-9/16	31-3/32	22-7/16	27-9/16	31-3/32
	mm	570	700	790	570	700	790	570	700	790
Depth	Inch	22-7/16	27-9/16	11-11/32	22-7/16	27-9/16	11-11/32	22-7/16	27-9/16	11-11/32
	mm	570	700	290	570	700	290	570	700	290
Refrigerant		R410A			R410A			R410A		
Additional Data										
Air Direction: Vertical		Automatic			Automatic			Automatic		
Air Filter		Washable			Washable			Washable		
Minimum Lineset Length	Ft (m)	10 (3)			10 (3)			10 (3)		
Maximum Lineset Length	Ft (m)	66 (20) (pre-charge: 49')			66 (20) (pre-charge: 49')			66 (20) (pre-charge: 49')		
Max. Vertical Diff.	Ft (m)	49 (15)			49 (15)			49 (15)		
Lineset Size	Inch	suc 3/8		dis 1/4	suc 3/8		dis 1/4	suc 1/2		dis 1/4
		Indoor AUU9RLF	Grille UTG-CCGF	Outdoor AOU9RLFC	Indoor AUU12RLF	Grille UTG-CCGF	Outdoor AOU12RLFC	Indoor AUU18RLF	Grille UTG-CCGF	Outdoor AOU18RLF

Note: Figures are based on 230 Volts.

9, 12, 18,000 BTUh SLIM DUCT HEAT PUMPS



1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.

2 Available only with optional wireless remote control.


3 Available only with optional Interface kit. Operation monitoring and On/Off control only.

FUNCTION


Slim ducts provide cooling or heating for small room applications such as offices, restaurants, convenience stores, motels, dorms, in retrofit and new construction. Long maximum combined piping length of 66' and 49' in height allow for versatile installations. Either horizontal or vertical flexibility and low height enables compact soffit or cabinet installation.

SLIM DUCT

Built-in drain pump allows for installation of slim duct unit in smaller spaces than traditional units.

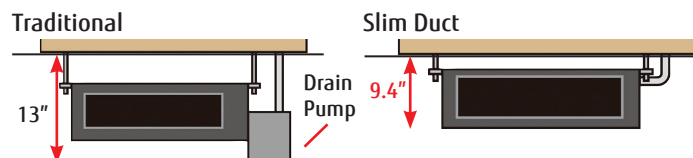


RETURN AIR-INTAKE CHOICES



FLEXIBLE INSTALLATION

Unit can be placed horizontally or vertically. However, internal drain pump will not operate when the unit is mounted in a vertical configuration.

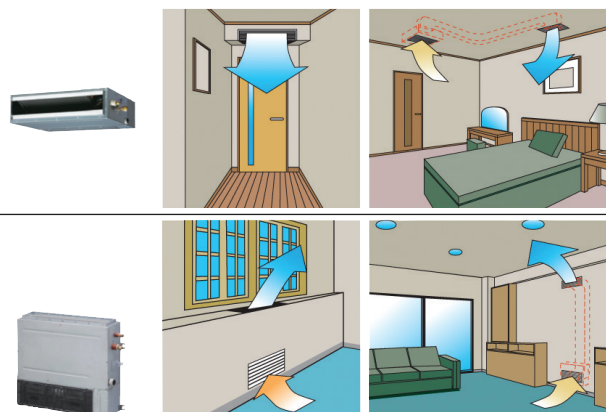

OPTIONAL ACCESSORIES

- Wired Remote Control: UTY-RVNUM
- Wireless Remote and Receiver UTY-LRHUM
- Auto Louver Grille Kit UTD-GXSA-W (for ARU7/9/12)
UTD-GXSB-W (for ARU18)




FIELD SUPPLIED FILTERS USED WITH SLIM DUCT UNITS

Although Slim Duct units come with factory filters, when return ductwork is used field supplied filters are more practical to use. They can be installed at the unit or for more convenient servicing, in filter grilles. See the guidelines to the right to determine filter sizes.

The chart includes CFM, external static pressure capability and a typical filter size for each model. Filters are sized to keep velocities and static pressure loss low. This will ensure sufficient static pressure is available for ductwork, fittings and supply and return grilles.



Alternative filter sizes with equivalent face areas can be used. After deducting filter loss, available static pressure values are shown.



A fiberglass filter is shown in blue to the left. A MERV 8 pleated filter is shown in white.

	ARU 9RLF	ARU 12RLF	ARU 18RLF
CFM	353	383	547
Typical Filter Size	12 x 20	12 x 20	14 x 25
Velocity, FPM	212	230	228
Unit External SP, in. W.C.	0.36	0.36	0.36
1" Fiberglass Filter			
SP Loss, in. W.C.	0.04	0.05	0.04
Available Static Pressure	0.32	0.31	0.32
1" MERV 8 Pleated Filter			
SP Loss, in. W.C.	0.12	0.14	0.14
Available Static Pressure	0.24	0.22	0.22
2" MERV 8 Pleated Filter			
SP Loss, in. W.C.	0.07	0.08	0.08
Available Static Pressure	0.29	0.28	0.28

HFI SYSTEMS 9RLFCD, 12RLFCD, 18RLFCD

UP TO 21.5 SEER		9RLFCD				12RLFCD				18RLFCD					
															
Performance		HFI				HFI				HFI					
Nominal Cooling	BTUh	9,000				12,000				18,000					
Min.-Max. Cooling	BTUh	3,100~12,000				3,100~13,600				3,100~20,100					
Nominal Heating	BTUh	12,000				16,000				21,600					
Min.-Max. Heating	BTUh	3,100~18,000				3,100~19,400				3,100~25,600					
SEER		21.5				20.0				19.7					
HSPF		12.2				11.5				11.3					
EER		14.5				12.8				12.0					
Cooling Operating Range	°F (°C)	14~115 (-10~46)				14~115 (-10~46)				14~115 (-10~46)					
Heating Operating Range	°F (°C)	-5~75 (-21~24)				-5~75 (-21~24)				-5~75 (-21~24)					
Moisture Removal	Pt./h (l/h)	1.5 (.07)				2.7 (1.3)				4.2 (2.0)					
Fan															
Air Circulation: Hi	CFM (m3/h)	353 (600)				383 (650)				554 (940)					
Medium	CFM (m3/h)	324 (550)				353 (600)				518 (880)					
Low	CFM (m3/h)	294 (500)				324 (550)				483 (820)					
Quiet	CFM (m3/h)	265 (450)				283 (480)				442 (750)					
Fan Speed Stage		4+auto				4+auto				4+auto					
Sound															
Indoor Sound Level (Clg/Htg): Hi	dB(A)	28/28				29/29				32/32					
Medium	dB(A)	27/26				28/28				30/30					
Low	dB(A)	26/25				27/27				29/29					
Quiet	dB(A)	25/24				26/24				27/27					
Outdoor Sound Level Clg/Htg	dB(A)	48/49				49/50				54/55					
Electrical															
Voltage/Frequency/Phase		208-230/60/1				208-230/60/1				208-230/60/1					
Circuit Breaker	Amps	15				15				20					
Current Rated: Cooling	Amps	3.0				4.4				6.6					
Current Rated: Heating	Amps	3.9				6.0				7.3					
Power Use Rated/Max: Cooling	kW	0.62/1.40				0.94/1.45				1.50/2.15					
Power Use Rated/Max: Heating	kW	0.85/1.80				1.30/2.00				1.67/2.60					
Size & Weight															
Net Weight	lbs. (kg)	41 (19)				84 (38)	41 (19)				84 (38)	50 (23)			
Dimensions: Height	Inch	7-25/32	5-15/16	6	24-1/2	7-25/32	5-15/16	6	24-1/2	7-25/32	5-15/16	6	24-1/2		
	mm	198	151	152	620	198	151	152	620	198	151	152	620		
Width	Inch	27-9/16	25-19/32	22	31-3/32	27-9/16	25-19/32	22	31-3/32	35-7/16	33-15/32	30	31-3/32		
	mm	700	650	559	790	700	650	559	790	900	850	762	790		
Depth	Inch	24-13/32	3/4	3/4 Flat	11-11/32	24-13/32	3/4	3/4 Flat	11-11/32	24-13/32	3/4	3/4 Flat	11-11/32		
	mm	620	19	19 Flat	290	620	19	19 Flat	290	620	19	19 Flat	290		
Refrigerant		R410A				R410A				R410A					
Additional Data															
Static Pressure in. W. C.		0 ~ 0.36				0 ~ 0.36				0 ~ 0.36					
Air Filter		Washable				Washable				Washable					
Minimum Lineset Length	Ft (m)	10 (3)				10 (3)				10 (3)					
Maximum Lineset Length	Ft (m)	66 (20) (pre-charge: 49')				66 (20) (pre-charge: 49')				66 (20) (pre-charge: 49')					
Max. Vertical Diff.	Ft (m)	49 (15)				49 (15)				49 (15)					
Lineset Size	Inch	suc 3/8				dis 1/4	suc 3/8				dis 1/4	suc 1/2			
		Indoor ARU9RLF	SUPPLY DUCT FLANGE	RETURN DUCT	Outdoor AO19RLF	Indoor ARU12RLF	SUPPLY DUCT FLANGE	RETURN DUCT	Outdoor AO12RLF	Indoor ARU18RLF	SUPPLY DUCT FLANGE	RETURN DUCT	Outdoor AO18RLF		

Note: Figures are based on 230 Volts.

18, 24, 36,000 BTU/h CEILING & UNIVERSAL HEAT PUMPS



1 Available only with optional wired remote control.

2 Fresh air knockout available. Fresh air fan and ductwork field supplied. See Design and Technical Manual for details.

APPLICATIONS

The universal floor/ceiling mount 18RULX and 24RULX are ideal for a house of worship to mount beneath stained glass windows. Lower in height than the pews, they do not disturb the aesthetics of the space. With long piping lengths of 165' the outdoor units can also be placed remotely out of sight. Another popular application for this model is in hallways where wall space is limited. The 36RSLX is popular where fresh air intake and high capacity is required like a restaurant or bar. They are also often suspended from threaded rod and used in multiple to condition large warehouse spaces.

FUNCTION

The 18RULX and the 24RULX are universal mount. They can mount low on the wall or transverse mount them on the ceiling. The 36RSLX can only be mounted on the ceiling, can take in fresh air and can throw air farther.


OPTIONAL ACCESSORIES

- Wired Remote Control UTY-RNBYU*
- Weekly Timer
- Full Function Wired Remote
- Child Lock Capable



*Requires dip switch change on indoor unit.

- Condensate Pump UTR-DPB24T
- OEM design plug and play
- Rated for 11.8" of vertical lift.
- Available only for System 36RSLX.




SYSTEMS 18RULX, 24RULX, 36RSLX

UP TO 16 SEER

UP TO 16 SEER		18RULX		24RULX		36RSLX	
Performance							
Nominal Cooling	BTUh	17,800		22,200		34,100	
Min.-Max. Cooling	BTUh	5,000~21,600		5,000~27,300		8,500~36,000	
Nominal Heating	BTUh	21,500		24,000		36,500	
Min.-Max. Heating	BTUh	5,000~25,600		5,000~29,000		9,200~42,700	
SEER		16.0		15.0		14.0	
HSPF		8.5		8.5		8.5	
EER		10.9		9.9		8.1	
Cooling Operating Range	°F (°C)	0~115 (-18~46)		0~115 (-18~46)		0~115 (-18~46)	
Heating Operating Range	°F (°C)	14~75 (-10~24)		14~75 (-10~24)		14~75 (-10~24)	
Moisture Removal	Pt./h (l/h)	5.3 (2.5)		7.4 (3.5)		7.4 (3.5)	
Fan							
Air Circulation: Hi	CFM (m3/h)	459 (780)		518 (880)		1089 (1850)	
Medium	CFM (m3/h)	383 (650)		436 (740)		977 (1660)	
Low	CFM (m3/h)	324 (550)		371 (630)		842 (1430)	
Quiet	CFM (m3/h)						
Fan Speed Stage		3 + Auto		3 + Auto		3 + Auto	
Sound							
Indoor Sound Level (Clg/Htg): Hi	dB(A)	43/43 (Clg/Htg)		47/47 (Clg/Htg)		48/48 (Clg/Htg)	
Medium	dB(A)	39/39 (Clg/Htg)		43/43 (Clg/Htg)		45/43 (Clg/Htg)	
Low	dB(A)	35/35 (Clg/Htg)		38/38 (Clg/Htg)		41/39 (Clg/Htg)	
Quiet	dB(A)						
Outdoor Sound Level Clg/Htg	dB(A)	51/53		53/55		54/55	
Electrical							
Voltage/Frequency/Phase		208-230/60/1		208-230/60/1		208-230/60/1	
Circuit Breaker	Amps	20		20		30	
Current Rated/Max: Cooling	Amps	7.1/12.5		9.8/12.5		18.3/18.8	
Current Rated/Max: Heating	Amps	9.8/12.5		10.2/12.5		15.3/18.8	
Power Use Rated/Max: Cooling	kW	1.63/2.88		2.25/2.88		4.22/4.35	
Power Use Rated/Max: Heating	kW	2.25/2.88		2.35/2.88		3.50/4.35	
Size & Weight							
Net Weight	lbs. (kg)	62 (28)	141 (64)	62 (28)	141 (64)	106 (48)	141 (64)
Dimensions: Height	Inch	7-7/8	32-3/4	7-7/8	32-3/4	9-1/2	32-3/4
	mm	199	830	199	830	240	830
Width	Inch	39-1/8	35-1/2	39-1/8	35-1/2	65-1/2	35-1/2
	mm	990	900	990	900	1660	900
Depth	Inch	25-7/8	13	25-7/8	13	27-5/8	13
	mm	655	330	655	330	700	330
Refrigerant		R410A		R410A		R410A	
Additional Data							
Air Direction: Horizontal		Automatic		Automatic		Automatic	
Vertical		Automatic		Automatic		Automatic	
Air Filter		Washable		Washable		Washable	
Front Grille		Permanent		Permanent		Permanent	
Minimum Lineset Length	Ft (m)	16 (5)		16 (5)		16 (5)	
Maximum Lineset Length	Ft (m)	165 (50) (pre-charge: 49')		165 (50) (pre-charge: 49')		165 (50) (pre-charge: 49')	
Max. Vertical Diff.	Ft (m)	66 (20)		66 (20)		98 (30)	
Lineset Size	Inch	Suc. 1/2	Dis. 1/4	Suc. 5/8	Dis. 3/8	Suc. 5/8	Dis. 3/8
		Indoor ABU18RULX	Outdoor AOU18RLX	Indoor ABU24RULX	Outdoor AOU24RLX	Indoor ABU36RSLX	Outdoor AOU36RLX

Note: Figures are based on 230 Volts.

18, 24, 36, 42,000 BTUh LARGE CASSETTE HEAT PUMPS

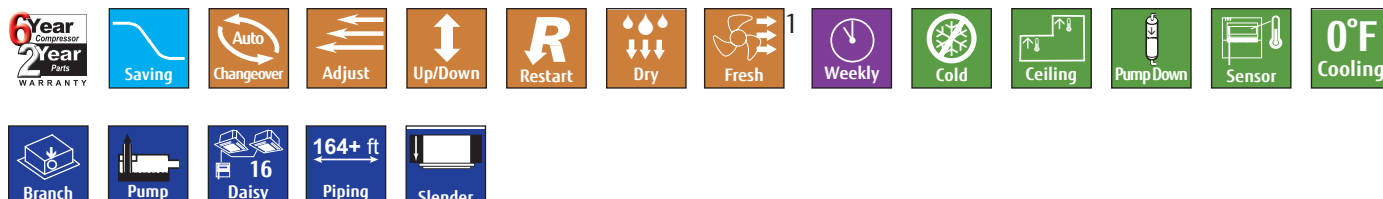


1 Fresh air knockout available. Fresh air fan and ductwork field supplied. See design and technical manual for details. Fujitsu fresh air intake kit available part #KHRS940-25.

FUNCTION

Up to 16-SEER, these models provide up to 30% increase in efficiency over 13-SEER models. These models offer the ability to send up to 38% of their capacity through two branch ducts to adjacent rooms. Slender fit feature now offered on all models decreases space required above the ceiling increasing application opportunities.

SLENDER FIT

Cassette body can be moved downward into the room 1-3/8" to accommodate limited ceiling space.

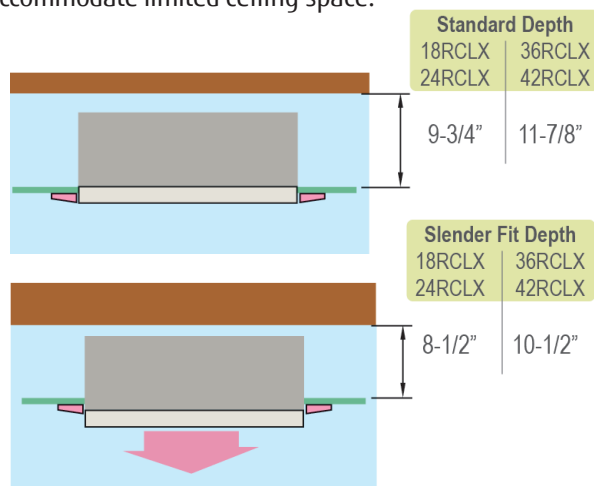

Fujitsu provides knock-outs on all ceiling cassettes where contractors can:

- Install optional field supplied branch ducts on up to two sides to supply up to 18% capacity per side to adjoining spaces up to 16 feet away. See Design and Technical Manual for details.
- Allows fresh air to be brought into the indoor unit using fresh air knockout.

APPLICATIONS

Four-way airflow, concealed flush mount design and the ability to operate in high ceiling rooms makes these systems ideal for commercial applications such as offices, conference rooms, restaurants, night clubs and bars in retrofit and new construction. Long maximum combined piping lengths of 165 to 230 feet with 60 to 98 feet of height, depending on model, allow the outdoor unit to be remotely located up to 7 stories away and far from indoor unit. The ceiling cassettes are also used in new construction condominiums and homes taking advantage of their branch duct capability to feed adjacent rooms. These heat pumps provide up to 30% additional available heat when compared to conventional models.



SYSTEMS 18RCLX, 24RCLX, 36RCLX, 42RCLX

UP TO 16.0 SEER

UP TO 16.0 SEER		18RCLX		24RCLX		36RCLX		42RCLX	
Performance									
Nominal Cooling	BTUh	17,800		22,200		34,100		42,700	
Min.-Max. Cooling	BTUh	5,000~21,500		5,000~27,300		8,500~36,000		13,700~45,000	
Nominal Heating	BTUh	21,000		24,200		36,000		45,200	
Min.-Max. Heating	BTUh	5,000~25,600		5,000~29,000		9,200~42,700		14,300~54,600	
SEER		16.0		15.0		14.0		15.0	
HSPF		8.5		8.5		8.5		8.5	
EER		11.1		10.6		8.1		9.2	
Cooling Operating Range	°F (°C)	0~115 (-18~46)		0~115 (-18~46)		0~115 (-18~46)		0~115 (-18~46)	
Heating Operating Range	°F (°C)	14~75 (-10~24)		14~75 (-10~24)		14~75 (-10~24)		0~75 (-18~24)	
Moisture Removal	Pt./h (l/h)	5.3 (2.5)		6.4 (3.0)		8.5 (4.0)		11.6 (5.5)	
Fan									
Air Circulation: Hi	CFM (m3/h)	559 (950)		618 (1,050)		942 (1,600)		1,000 (1,700)	
Medium	CFM (m3/h)	477 (810)		536 (910)		824 (1,400)		854 (1,450)	
Low	CFM (m3/h)	394 (670)		436 (740)		677 (1,150)		736 (1,250)	
Fan Speed Stage		3 + Auto		3 + Auto		3 + Auto		3 + Auto	
Sound									
Indoor Sound Level (Clg/Htg): Hi	dB(A)	42/40 (Clg/Htg)		45/43 (Clg/Htg)		48/48 (Clg/Htg)		50/50 (Clg/Htg)	
Medium	dB(A)	39/38 (Clg/Htg)		43/39 (Clg/Htg)		45/45 (Clg/Htg)		48/48 (Clg/Htg)	
Low	dB(A)	36/36 (Clg/Htg)		38/35 (Clg/Htg)		41/41 (Clg/Htg)		44/44 (Clg/Htg)	
Outdoor Sound Level Clg/Htg	dB(A)	51/53 (Clg/Htg)		53/55 (Clg/Htg)		54/55 (Clg/Htg)		55/56 (Clg/Htg)	
Electrical									
Voltage/Frequency/Phase		208-230/60/1		208-230/60/1		208-230/60/1		208-230/60/1	
Circuit Breaker	Amps	20		20		30		30	
Current Rated/Max: Cooling	Amps	7.0/12.5		9.2/12.5		18.3/18.8		20.3/21.7	
Current Rated/Max: Heating	Amps	8.9/12.5		10.4/12.5		16.1/18.8		18.8/21.7	
Power Use Rated/Max: Cooling	kW	1.61/2.88		2.10/2.88		4.22/4.35		4.66/4.99	
Power Use Rated/Max: Heating	kW	2.05/2.88		2.37/2.88		3.70/4.35		4.31/4.99	
Size & Weight									
Net Weight	lbs. (kg)	Suc. 1/2	Dis. 1/4	Suc. 5/8	Dis. 3/8	Suc. 5/8	Dis. 3/8	Suc. 5/8	Dis. 3/8
Dimensions: Height	Inch	75 (34)	141 (64)	75 (34)	141 (64)	82 (37)	141 (64)	88 (40)	231 (105)
	mm	9-3/4	32-3/4	9-3/4	32-3/4	11-5/8	32-3/4	11-5/8	50-7/8
Width	Inch	246	830	246	830	296	830	296	1290
	mm	32-3/4	35-1/2	32-3/4	35-1/2	32-3/4	35-1/2	32-3/4	35-1/2
Depth	Inch	830	900	830	900	830	900	830	900
	mm	32-3/4	13	32-3/4	13	32-3/4	13	32-3/4	13
Refrigerant		830	330	830	330	830	330	830	330
Additional Data									
Air Direction: Horizontal		-		-		-		-	
Vertical		Automatic		Automatic		Automatic		Automatic	
Air Filter		Washable		Washable		Washable		Washable	
Front Grille		Removable		Removable		Removable		Removable	
Minimum Lineset Length	Ft (m)	16 (5)		16 (5)		16 (5)		16 (5)	
Maximum Lineset Length	Ft (m)	165 (50) Each (pre-charge: 49')		165 (50) Each (pre-charge: 49')		165 (50) Each (pre-charge: 49')		230 (70) Each (pre-charge: 66)	
Max. Vertical Diff.	Ft (m)	66 (20)		66 (20)		98 (30)		98 (30)	
Lineset Size	Inch	Suc. 1/2	Dis. 1/4	Suc. 5/8	Dis. 3/8	Suc. 5/8	Dis. 3/8	Suc. 5/8	Dis. 3/8
		Indoor AUU18RCLX	Outdoor AOU18RLX	Indoor AUU24RCLX	Outdoor AOU24RLX	Indoor AUU36RCLX	Outdoor AOU36RLX	Indoor AUU42RCLX	Outdoor AOU42RLX

Note: Figures are based on 230 Volts.

MULTI-ZONE MINI-SPLIT SYSTEMS

- Operate as few as one indoor unit or all indoor units
- Choose from 4 indoor unit styles - wall mount, slim duct, compact cassette, and floor mount
- Six combinations are ENERGY STAR® qualified
- Create hundreds of combinations based on indoor type and BTUh



- Connect 2 to 5 indoor units, depending on model
- Connect 14,000 to 54,000 BTUh
- No branch boxes or separation tubes required



18, 24, 36,000 BTUh

- Connect 2 to 4 indoor units, depending on model
- Connect 14,000 to 39,000 BTU
- eXtra Low Temp Heating down to -15°F outdoor temps
- No branch boxes or separation tubes required




- Connect 2 to 8 indoor units
- 80 to 130% connectable capacity
- Connect 39,000 to 62,000 BTU
- Branch boxes and separation tubes required



YEAR-ROUND, WHOLE HOME OR BUSINESS COMFORT

Halcyon Systems are some of today's most advanced forms of heating and air conditioning. Multi-zone outdoor units can operate from 2 to 8 indoor units simultaneously. Fujitsu's systems are super quiet as well as highly energy efficient.

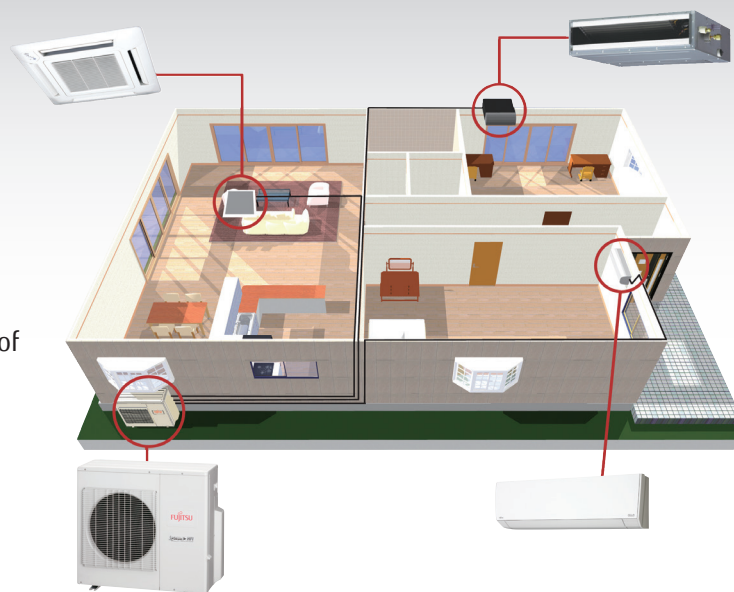

MULTI-ZONE AND XLTH SERIES SYSTEMS

18, 24, 36, AND 45,000 BTUh

AOU18RLXFZ

AOU24RLXFZ

AOU36RLXFZ1

AOU45RLXFZ

AOU18RLXFZH

AOU24RLXFZH

AOU36RLXFZH

CONNECTABLE CAPACITY

This allows connectable indoor units' total capacity to exceed outdoor unit capacity. See Allowable Combination Table on page 64.

If all indoor units are cooling or heating at the same time, the system will limit their capacity so that their total matches the outdoor unit's capacity. When a zone meets a desired set temperature it requires less capacity. The unused capacity is then distributed to the remaining indoor units, increasing their capacity.

FOR EXAMPLE

The load on a 3-bedroom home with a living room and kitchen downstairs and 3 bedrooms upstairs is 39,000 BTUh (21,000 BTU downstairs and 18,000 BTU upstairs). However the family isn't upstairs and downstairs at the same time, therefore not all units will be running simultaneously allowing 100% heating or cooling to occupied spaces. This can be achieved by our AOU36RLXFZ1 outdoor unit.

HFI SERIES SYSTEM 48,000 BTUh

AOU48RLXFZ1

130% CONNECTABLE CAPACITY

The HFI system is rated at 48,000 BTUh but you can connect up to 130%, or 62,000 BTUh of rated indoor unit capacity to the AOU48RLXFZ1. Connectable capacity allows you to connect indoor units that can exceed outdoor unit capacity. However, if you connect indoor units that exceed 100% of the outdoor unit's capacity there are limitations.

If all indoor units are cooling or heating at the same time, the system will limit their capacity so that their total matches the outdoor unit's capacity. When a zone meets a desired set temperature it requires less capacity. The unused capacity is then distributed to the remaining indoor units, increasing their capacity.

FOR EXAMPLE









The load on a small 2-story office building with a business downstairs and worker apartments upstairs is 62,000 BTUh (38,000 BTUh downstairs and 24,000 BTUh upstairs) but the workers aren't upstairs and downstairs at the same time, therefore not all units will be running simultaneously allowing 100% heating or cooling to occupied spaces.

MIX AND MATCH FLEXIBILITY

The ability to create the **right** combinations, the **right** quantity (up to 8-zones), the **right** style indoor units, and the **right** capacity. It's the **RIGHT** choice for your home or business.

MULTI-ZONE INDOOR UNITS

WALL MOUNTS					
ASU7, 9, 12RLF1	✓	✓	✓	✓	✓
ASU15RLF1		✓	✓	✓	✓
ASU18RLF		✓	✓	✓	✓
ASU24RLF			✓	✓	✓
FLOOR MOUNTS					
AGU9, 12RLF	✓	✓	✓	✓	✓
AGU15RLF		✓	✓	✓	✓
SLIM DUCTS					
ARU7, 9, 12RLF	✓	✓	✓	✓	✓
ARU18RLF		✓	✓	✓	✓
ARU24RLF			✓	✓	✓
COMPACT CASSETTES					
AUU7, 9, 12RLF	✓	✓	✓	✓	✓
AUU18RLF		✓	✓	✓	✓
OTHER					
SEPARATION TUBES: UTP-SX248A					✓
BRANCH BOXES: UTP-PU03A, B					✓

				
AOU18RLXFZ	AOU24RLXFZ	AOU36RLXFZ1	AOU45RLXFZ	AOU48RLXFZ1
				
AOU18RLXFZH	AOU24RLXFZH	AOU36RLXFZH		

MULTI-ZONE OUTDOOR UNITS

INDIVIDUAL ZONING: PERSONALIZED WHOLE HOME COMFORT

WALL MOUNTED

They mount high on a wall, out of sight and do not require ductwork, increasing energy efficiency.

- Quiet operation
- Easy maintenance
- High delivered efficiency means lower utility bills



SLIM DUCT

Mounted in a ceiling or in a framed enclosure below a ceiling. They use minimal ductwork and remain very energy efficient.

- Concealed and out of sight
- Look of central air with the efficiency of a mini-split
- Less ducts = higher efficiency

COMPACT CASSETTE

Cassettes are extremely discreet, with only the grille showing in the ceiling. They use the latest fan technology to distribute the conditioned air evenly.

- Wired remote control (wireless is optional)
- Powerful turbo fan operation
- Fits into a standard 2' x 2' ceiling grid



FLOOR MOUNTED

Floor mount systems are ideal for residential radiator replacements or any room with limited upper wall space, like a kitchen or sunroom.

- Compact size fits easily under a standard window
- Features twin airflow for improved heat delivery
- Designer wireless remote control

7, 9, 12, 15, 18, 24,000 BTUh WALL MOUNT


MULTI-ZONE INDOOR



ASU7, 9, 12, 15RLF1



ASU18, 24RLF

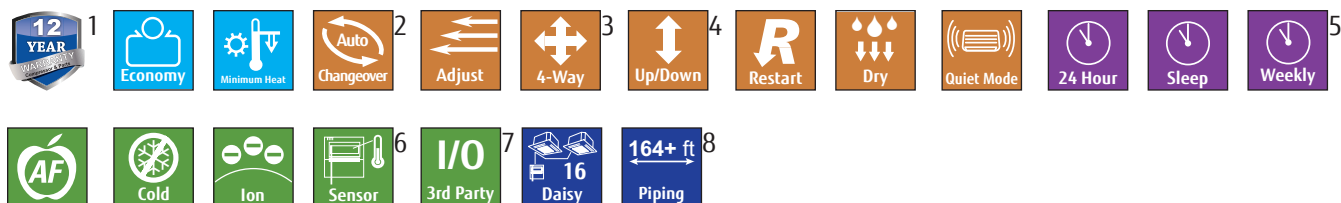

1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.

2 Auto Changeover is not designed to provide rapid changes between heating and cooling operation or simultaneous heating and cooling. This feature is not recommended for systems with more than one indoor unit unless all indoor units have similar heating and cooling requirements and have similar temperature set points. If all indoor units have similar heating and cooling requirements and have similar temperature set points, auto changeover will work.

3 RLF models only.

4 RLF1 models only.

5 RLF1 models: Available only with optional wired remote control.

6 Available only with optional wired remote control and optional interface kit.

7 Available only with optional interface kit.

8 Available only when used with Flex Zone AOU48RLXFZ1 outdoor unit.



BUILT IN FILTRATION

LONG-LIFE ION DEODORIZATION FILTER



The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine-particle ceramic. The filter can be used for approximately 3 years if it is washed with water when dirty to restore its surface action.

APPLE-CATECHIN FILTER









Dust, mold spores and micro-organisms are absorbed onto the filter by static electricity and growth is inhibited and deactivated.

HFI ASU7RLF1, ASU9RLF1, ASU12RLF1, ASU15RLF1, ASU18RLF, ASU24RLF



		ASU7RLF1	ASU9RLF1	ASU12RLF1	ASU15RLF1	ASU18RLF	ASU24RLF
Performance		HFI	HFI	HFI	HFI	HFI	HFI
Nominal Cooling	BTUh	7,000	9,000	12,000	14,000	18,000	24,000
Nominal Heating	BTUh	8,100	10,200	13,500	16,300	20,000	27,000
Fan							
Air Circulation: Hi	CFM (m3/h)	Clg 330 (560) Htg 330 (560)	Clg 353 (600) Htg 353 (600)	Clg 388 (660) Htg 388 (660)	Clg 430 (730) Htg 430 (730)	Clg 542 (920) Htg 542 (920)	Clg 659 (1,120) Htg 647 (1,100)
Medium	CFM (m3/h)	Clg 294 (500) Htg 294 (500)	Clg 306 (520) Htg 306 (520)	Clg 330 (560) Htg 330 (560)	Clg 353 (600) Htg 362(615)	Clg 436 (740) Htg 436 (740)	Clg 530 (900) Htg 530 (900)
Low	CFM (m3/h)	Clg 253 (430) Htg 253 (430)	Clg 253 (430) Htg 253 (430)	Clg 265 (450) Htg 277 (470)	Clg 312 (530) Htg 330 (560)	Clg 365 (620) Htg 365 (620)	Clg 436 (740) Htg 436 (740)
Quiet	CFM (m3/h)	Clg 182 (310) Htg 194 (330)	Clg 182 (310) Htg 194 (330)	Clg 182 (310) Htg 194 (330)	Clg 212 (360) Htg 221 (375)	Clg 324 (550) Htg 324 (550)	Clg 365 (620) Htg 365 (620)
Fan Speed Stage		4+auto	4+auto	4+auto	4+auto	4+auto	4+auto
Sound							
Indoor Sound Level (Clg/Htg): Hi	dB(A)	36/36	37/37	40/40	42/42	43/44	49/48
Medium	dB(A)	32/32	33/33	36/36	38/38	37/37	42/42
Low	dB(A)	29/29	29/29	30/31	33/35	33/33	37/37
Quiet	dB(A)	21/22	21/22	21/22	25/27	31/31	33/33
Electrical							
Voltage/Frequency/Phase		208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Current Rated: Cooling	Amps	0.13	0.15	0.19	0.25	0.32	0.53
Current Rated: Heating	Amps	0.13	0.15	0.19	0.25	0.32	0.53
Power Use Rated: Cooling	W	15	17	22	28	41	69
Power Use Rated: Heating	W	15	17	22	28	41	69
Size & Weight							
Net Weight	lbs. (kg)	19 (8.5)	19 (8.5)	19 (8.5)	19 (8.5)	31 (14)	31 (14)
Dimensions: Height	Inch	10-1/2	10-1/2	10-1/2	10-1/2	12-5/8	12-5/8
	mm	268	268	268	268	320	320
Width	Inch	33-1/16	33-1/16	33-1/16	33-1/16	39-1/4	39-1/4
	mm	840	840	840	840	998	998
Depth	Inch	8	8	8	8	9	9
	mm	203	203	203	203	228	228
Refrigerant		R410A	R410A	R410A	R410A	R410A	R410A
Additional Data							
Air Direction: Horizontal		Manual	Manual	Manual	Manual	Auto	Auto
Vertical		Auto	Auto	Auto	Auto	Auto	Auto
Primary Air Filter		Washable	Washable	Washable	Washable	Washable	Washable
Ion Deodorizing Filter		Disposable	Disposable	Disposable	Disposable	Disposable	Disposable
Apple-Catechin Filter		Disposable	Disposable	Disposable	Disposable	Disposable	Disposable
Lineset Size	Inch	suc 3/8	suc 3/8	suc 3/8	suc 1/4 dis 1/2	suc 1/2	suc 5/8

The following combinations are ENERGY STAR® qualifying:

		AOU18RLXFZ with (2) ASU9RLF1 AOU18RLXFZ with (1) ASU7RLF1 + (1) ASU12RLF1 AOU18RLXFZ with (1) ASU9RLF1 + (1) ASU12RLF1 AOU18RLXFZH with (2) ASU9RLF1
		AOU24RLXFZ with (2) ASU7RLF1 + (1) ASU9RLF1 AOU24RLXFZH with (2) ASU7RLF1 + (1) ASU9RLF1
		AOU36RLXFZH with (4) ASU9RLF1

7, 9, 12, 18, 24,000 BTUh SLIM DUCT


MULTI-ZONE INDOOR

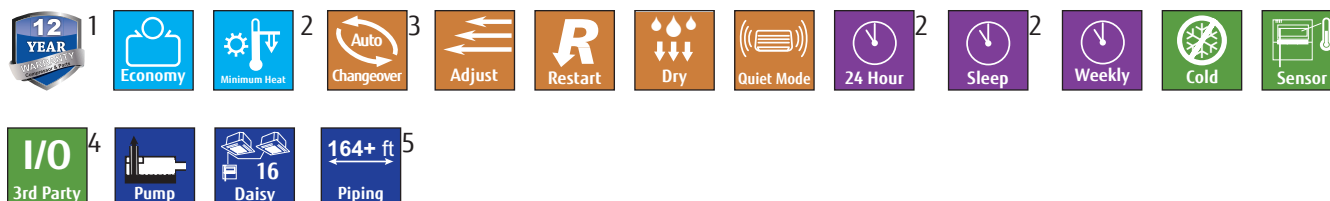

- 1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.
 2 Available only with optional wireless remote control.
 3 Auto Changeover is not designed to provide rapid changes between heating and cooling operation or simultaneous heating and cooling. This feature is not recommended for systems with more than one indoor unit unless all indoor units have similar heating and cooling requirements and have similar temperature set points. If all indoor units have similar heating and cooling requirements and have similar temperature set points, auto changeover will work.
 4 Available only with optional interface kit.
 5 Available only when used with Flex Zone AOU48RLXFZ1 outdoor unit.


FLEXIBLE INSTALLATION

Horizontal or vertical, though internal drain pump will not operate when the unit is mounted in a vertical configuration.

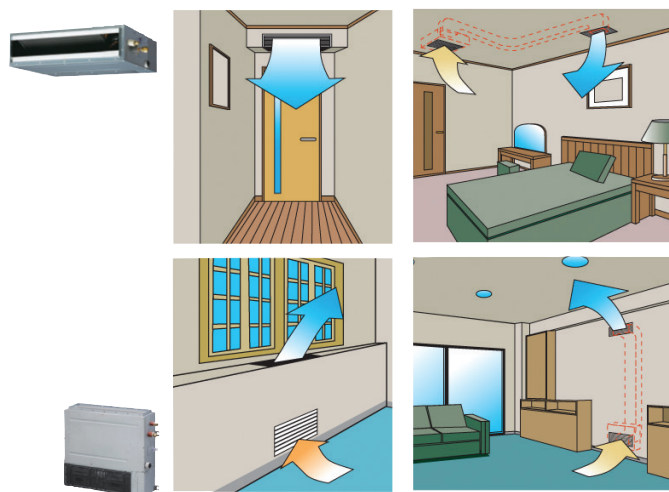

SLIM DUCT

Adaptable when ceiling cavity is small and there is no slope for drain.

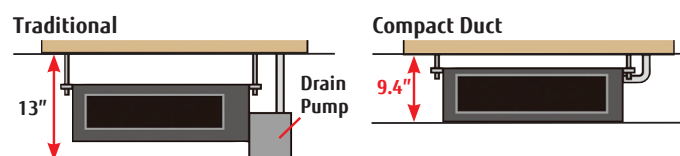

FIELD SUPPLIED FILTERS

Filters are sized to keep velocities and static pressure loss low. This will ensure sufficient static pressure is available for ductwork, fittings and supply and return grilles. Alternative filter sizes with equivalent face areas can be used.

CFM
 Typical Filter Size
 Velocity, FPM
 Unit External SP, in. W.C.
 SP Loss, in. W.C.
 Available Static Pressure
 SP Loss, in. W.C.
 Available Static Pressure
 SP Loss, in. W.C.
 Available Static Pressure


ARU7RLF	ARU9RLF	ARU12RLF	ARU18RLF	ARU24RLF
323	353	383	554	785
12 x 20	12 x 20	12 x 20	14 x 25	18 x 30
194	212	230	228	209
0.36	0.36	0.36	0.36	0.20
1" Fiberglass Filter				
0.04	0.04	0.05	0.04	0.04
0.32	0.32	0.31	0.32	0.16
1" MERV 8 Pleated Filter				
0.10	0.12	0.14	0.14	0.12
0.26	0.24	0.22	0.22	0.08
2" MERV 8 Pleated Filter				
0.06	0.07	0.08	0.08	0.07
0.30	0.29	0.28	0.28	0.13

HFI ARU7RLF, ARU9RLF, ARU12RLF, ARU18RLF, ARU24RLF

		ARU7RLF	ARU9RLF	ARU12RLF	ARU18RLF	ARU24RLF
Performance		HFI	HFI	HFI	HFI	HFI
Nominal Cooling	BTUh	7,000	9,000	12,000	18,000	24,000
Nominal Heating	BTUh	8,100	10,200	13,500	20,000	27,000
Fan						
Air Circulation: Hi	CFM (m3/h)	323 (550)	353 (600)	383 (650)	554 (940)	783 (1,330)
Medium	CFM (m3/h)	288 (490)	324 (550)	353 (600)	518 (880)	730 (1,240)
Low	CFM (m3/h)	276 (470)	294 (500)	324 (550)	483 (820)	648 (1,100)
Quiet	CFM (m3/h)	259 (440)	265 (450)	283 (480)	442 (750)	607 (1,030)
Fan Speed Stage		4 + Auto	4 + Auto	4 + Auto	4 + Auto	4 + Auto
Sound						
Indoor Sound Level (Clg/Htg): Hi	dB(A)	28/28	28/28	29/29	32/33	33/35
Medium	dB(A)	26/26	27/26	28/28	31/32	32/34
Low	dB(A)	25/25	26/25	27/27	30/31	30/32
Quiet	dB(A)	24/24	25/24	26/24	29/29	29/29
Electrical						
Voltage/Frequency/Phase		208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Static Pressure	W. C.	0 ~ 0.36	0 ~ 0.36	0 ~ 0.36	0 ~ 0.36	0 ~ 0.20
Current Rated: Cooling	Amps	0.30	0.30	0.35	0.44	0.66
Current Rated: Heating	Amps	0.30	0.30	0.35	0.44	0.66
Power Use Rated: Cooling	W	33	49	58	73	111
Power Use Rated: Heating	W	33	49	58	73	111
Size & Weight						
Net Weight	lbs. (kg)	37 (17)	41 (19)	41 (19)	50 (23)	59 (27)
Dimensions: Height	Inch	7-25/32	7-25/32	7-25/32	7-25/32	7-25/32
	mm	198	198	198	198	198
Width	Inch	27-9/16	27-9/16	27-9/16	35-7/16	43-5/16
	mm	700	700	700	900	1,100
Depth	Inch	24-13/32	24-13/32	24-13/32	24-13/32	24-13/32
	mm	620	620	620	620	620
Supply Duct Flange Dimensions: Height	Inch	5-15/16	5-15/16	5-15/16	5-15/16	5-15/16
	mm	151	151	151	151	151
Width	Inch	25-19/32	25-19/32	25-19/32	33-15/32	41-11/32
	mm	650	650	650	850	1,050
Depth	Inch	3/4	3/4	3/4	3/4	3/4
	mm	19	19	19	19	19
Return Duct Dimensions: Height	Inch	6	6	6	6	6
	mm	152	152	152	152	152
Width	Inch	22	22	22	30	37-3/4
	mm	559	559	559	762	959
Height	Inch	3/4 (Flat)	3/4 (Flat)	3/4 (Flat)	3/4 (Flat)	3/4 (Flat)
	mm	19 (Flat)	19 (Flat)	19 (Flat)	19 (Flat)	19 (Flat)
Refrigerant		R410A	R410A	R410A	R410A	R410A
Additional Data						
Air Filter		Washable	Washable	Washable	Washable	Washable
Lineset Size	Inch	suc 3/8 dis 1/4	suc 3/8 dis 1/4	suc 3/8 dis 1/4	suc 1/2 dis 1/4	suc 5/8 dis 1/4

7, 9, 12, 18,000 BTUh COMPACT CASSETTES



MULTI-ZONE INDOOR

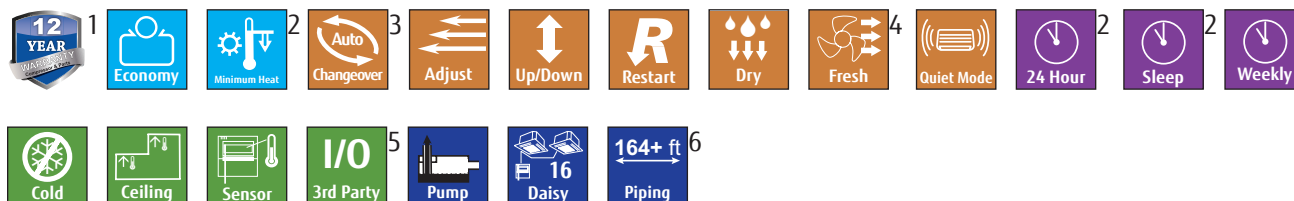

- 1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in residence. See full warranty for details.
- 2 Available only with optional wireless remote control.
- 3 Auto Changeover is not designed to provide rapid changes between heating and cooling operation or simultaneous heating and cooling. This feature is not recommended for systems with more than one indoor unit unless all indoor units have similar heating and cooling requirements and have similar temperature set points. If all indoor units have similar heating and cooling requirements and have similar temperature set points, auto changeover will work.
- 4 Requires Fujitsu's Optional Fresh Air Kit part #UTZ-VXAA. Allows for a 4-inch flex duct connection. Requires a field supplied duct booster fan capable of 60 CFM at .2"W.C. or 90 CFM at .4"W.C. For fan static pressure requirements, see installation manual. Add hood, filter and duct losses for fan total static pressure requirements. Will add 4" to the height of the indoor unit.
- 5 Available only with optional Interface kit. Operation monitoring and On/Off control only.
- 6 Available only when used with Flex Zone AOU48RLXFZ1 outdoor unit.

EASY INSTALLATION

Fits into a standard ceiling tile. Dimensions of outer grille are 27-9/16" x 27-9/16" and may overlap adjacent tiles.

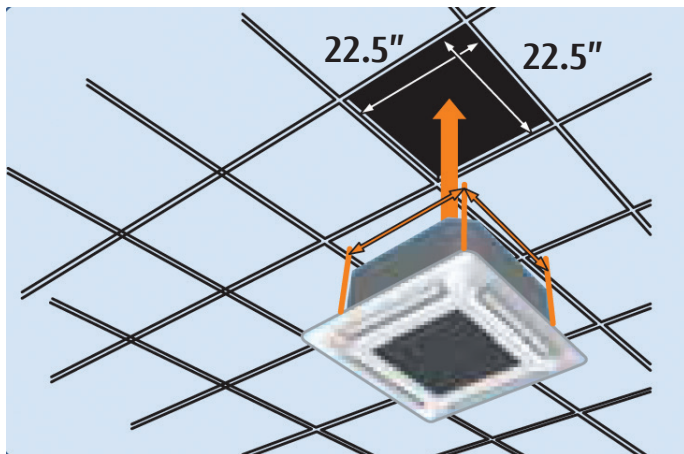


Fresh Air Kit**

UTZ-VXAA

Mixes room air then passes through the heat exchanger.

2-STAGE TURBO FAN

Air distribution is evenly spread across the heat exchanger by the 2 stage turbo fan which produces two separate airflow streams.

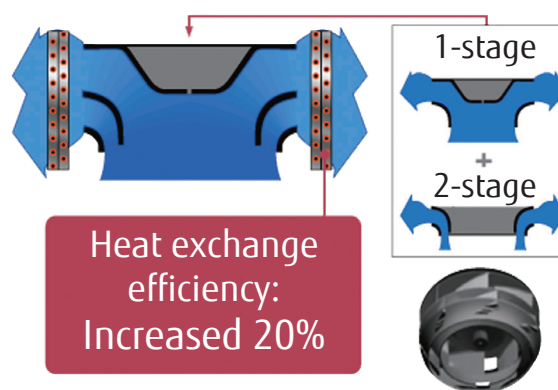

HFI AUU7RLF, AUU9RLF, AUU12RLF, AUU18RLF

		AUU7RLF	AUU9RLF	AUU12RLF	AUU18RLF
Performance		HFI	HFI	HFI	HFI
Nominal Cooling	BTUh	7,000	9,000	12,000	18,000
Nominal Heating	BTUh	8,100	10,200	13,500	20,000
Fan					
Air Circulation: Hi	CFM (m3/h)	318 (540) Clg or Htg	318 (540) Clg or Htg	359 (610) Clg or Htg	441 (750) Clg 471 (800) Htg
Medium	CFM (m3/h)	288 (490) Clg or Htg	288 (490) Clg or Htg	312 (530) Clg or Htg	359 (610) Clg 418 (710) Htg
Low	CFM (m3/h)	259 (440) Clg or Htg	259 (440) Clg or Htg	277 (470) Clg or Htg	306 (520) Clg 353 (600) Htg
Quiet	CFM (m3/h)	230 (390) Clg or Htg	230 (390) Clg or Htg	241 (410) Clg or Htg	241 (410) Clg 265 (450) Htg
Fan Speed Stage		4+auto	4+auto	4+auto	4+auto
Sound					
Indoor Sound Level (Clg/Htg): Hi	dB(A)	33/34	33/34	37/37	42/44
Medium	dB(A)	31/32	31/32	33/33	37/40
Low	dB(A)	29/29	29/29	31/31	33/37
Quiet	dB(A)	27/27	27/27	28/28	29/30
Electrical					
Voltage/Frequency/Phase		208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Current Rated: Cooling	Amps	0.15	0.15	0.19	0.30
Current Rated: Heating	Amps	0.15	0.15	0.19	0.30
Power Use Rated/Max: Cooling	(kw)	18	18	23	39
Power Use Rated/Max: Heating	(kw)	18	18	23	39
Size & Weight					
Net Weight	lbs. (kg)	33 (15)	33 (15)	33 (15)	33 (15)
Dimensions: Height	Inch	9-11/16	9-11/16	9-11/16	9-11/16
	mm	245	245	245	245
Width	Inch	22-7/16	22-7/16	22-7/16	22-7/16
	mm	570	570	570	570
Depth	Inch	22-7/16	22-7/16	22-7/16	22-7/16
	mm	570	570	570	570
Refrigerant		R410A	R410A	R410A	R410A
Additional Data					
Air Direction: Vertical		Automatic	Automatic	Automatic	Automatic
Air Filter		Washable	Washable	Washable	Washable
Front Grille		UTG-CCGF*	UTG-CCGF*	UTG-CCGF*	UTG-CCGF*
Grille Dim: Height	Inch (mm)	1-15/16 (49)	1-15/16 (49)	1-15/16 (49)	1-15/16 (49)
Width	Inch (mm)	27-9/16 (700)	27-9/16 (700)	27-9/16 (700)	27-9/16 (700)
Depth	Inch (mm)	27-9/16 (700)	27-9/16 (700)	27-9/16 (700)	27-9/16 (700)
Lineset Size	Inch	suc 3/8 dis 1/4	suc 3/8 dis 1/4	suc 3/8 dis 1/4	suc 1/2 dis 1/4

* Compact Cassette Grille UTG-CCGF sold separately. Must order one with each compact cassette.

9, 12, 15,000 BTU_h FLOOR MOUNT


MULTI-ZONE INDOOR



1												2	
		2	3	2	<p>1 Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.</p> <p>2 Available with optional wired remote control.</p> <p>3 Available only with optional Interface kit. Operation monitoring and On/Off control only.</p>								

2-FAN AND WIDE AIRFLOW

Having both upper and lower airflow quickly warms or cools the entire room. Floor mount can be set in "Upward Airflow Only" when occupants wish not to have feet warmed or cooled.



<p>Cooling</p> <p>Fig. 1</p> <p>Fig. 2</p>	<p>Heating</p> <p>Fig. 1</p> <p>Fig. 2</p>
<p>1. Upon startup, both top and bottom louvers open.</p> <p>2. As the room temperature nears the setpoint, only the top louver stays open to help prevent cold air from falling.</p>	<p>1. Upon startup, both top and bottom louvers open.</p> <p>2. Closer to setpoint, only the top louver stays open to help prevent cold drafts from windows.</p>

FLEXIBLE AND EASY INSTALLATION

<p>Beneath standard window</p>	<p>Standard concave portion</p>
<p>Wall</p>	<p>Half concealed*</p>

*Field supplied insulation required




HFI AGU9RLF, AGU12RLF, AGU15RLF

		AGU9RLF		AGU12RLF		AGU15RLF	
Performance		HFI		HFI		HFI	
Nominal Cooling	BTUh	9,000		12,000		14,200	
Nominal Heating	BTUh	12,000		16,000		18,000	
Fan							
Air Circulation: Hi	CFM (m3/h)	312 (530)		353 (600)		383 (650)	
Medium	CFM (m3/h)	259 (440)		288 (490)		306 (520)	
Low	CFM (m3/h)	212 (360)		224 (380)		235 (400)	
Quiet	CFM (m3/h)	159 (270)		159 (270)		159 (270)	
Fan Speed Stage		4+Auto		4+Auto		4+Auto	
Sound							
Indoor Sound Level (Clg/Htg): Hi	dB(A)	39/39		42/42		44/44	
Medium	dB(A)	34/34		36/38		38/39	
Low	dB(A)	28/28		30/32		31/33	
Quiet	dB(A)	22/22		22/22		22/22	
Electrical							
Voltage/Frequency/Phase		208-230/60/1		208-230/60/1		208-230/60/1	
Current Rated: Cooling	Amps	0.15		0.18		0.20	
Current Rated: Heating	Amps	0.15		0.18		0.20	
Power Use Rated: Cooling	(kw)	16		18		23	
Power Use Rated: Heating	(kw)	16		18		23	
Size & Weight							
Net Weight	lbs. (kg)	31 (14)		31 (14)		31 (14)	
Dimensions: Height	Inch	23-5/8		23-5/8		23-5/8	
	mm	600		600		600	
Width	Inch	29-1/8		29-1/8		29-1/8	
	mm	740		740		740	
Depth	Inch	7-7/8		7-7/8		7-7/8	
	mm	200		200		200	
Refrigerant		R410A		R410A		R410A	
Additional Data							
Air Direction: Horizontal		Manual		Manual		Manual	
Air Direction: Vertical		Auto		Auto		Auto	
Apple Catechin Filter		Washable		Washable		Washable	
Ion Deodorizing Filter		Yes		Yes		Yes	
Connection Method		Yes		Yes		Yes	
Lineset Size	Inch	Suc. 3/8	Dis. 1/4	Suc. 3/8	Dis. 1/4	Suc. 1/2	Dis. 1/4



18, 24, 36, 45,000 BTU/h MULTI-ZONE OUTDOOR UNITS

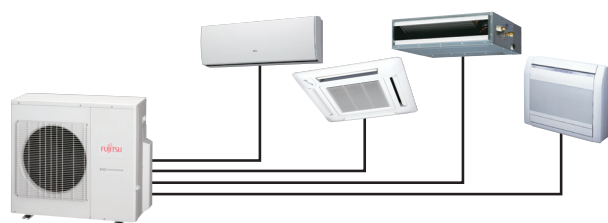

Outdoor unit

Contractors can select either an 18, 24, 36 or 45,000 BTU outdoor unit combined with wall mounted, slim duct, compact cassette or floor mount type indoor units. Mix-and-match flexibility of evaporator type and capacity allows you to choose the indoor unit that best fits the application, whether it be hidden or showcased. These systems are ideal for nursing homes, doctor's offices, condominiums, apartments and residences - any place where individual cooling or heating is needed.


DC TWIN ROTARY COMPRESSOR

A high performance, low noise, large capacity DC twin rotary compressor is used.



COMPACT SIZE

The compact size of the outdoor units allows for many installation opportunities.

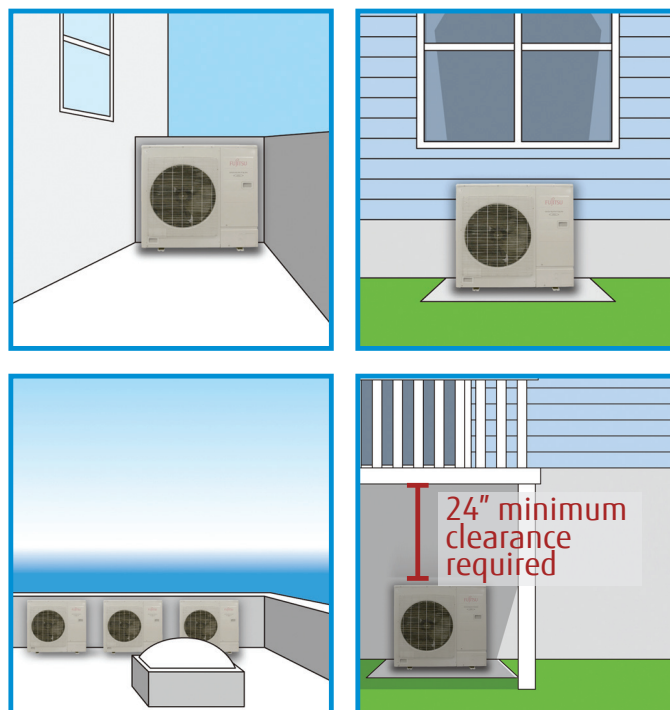

NOMINAL CAPACITIES, SEER AND HSPF RATINGS

Data below is based on AHRI 210/240 non-ducted wall mounted models. Yellow rows represent systems that are ENERGY STAR® qualified.



Model	Indoor Unit		Cooling Capacity Btu/h 95°F	EER	SEER	Heating Rated Capacity Btu/h		Heating Maximum Capacity Btu/h		COP 47°F	HSPF
	Type	Combination				47°F	17°F	17°F	5°F		
AOU18RLXFZ	Non-Ducted	9+9	18,000	12.5	18.0	22,000	13,900	16,300	13,900	3.44	9.3
	Ducted	9+9	18,000	12.1	16.0	22,000	13,900	16,300	13,900	3.52	9.0
	Mixed	9+9	18,000	12.3	17.0	22,000	13,900	16,300	13,900	3.48	9.2
	Specific	ASU7+ASU12 and ASU9+ASU12	18,000	12.5	18.0	22,000	13,900	16,300	13,900	3.67	9.0
AOU24RLXFZ	Non-Ducted	9+7+7	22,000	12.5	18.0	24,000	14,100	19,800	16,300	4.04	9.5
	Ducted	9+7+7	22,000	10.6	15.5	24,000	14,100	19,800	16,300	3.42	9.0
	Mixed	9+7+7	22,000	11.6	16.8	24,000	14,100	19,800	16,300	3.74	9.3
AOU36RLXFZ1	Non-Ducted	9+9+9+9	35,200	10.0	18.0	24,000	22,000	32,500	25,400	3.56	9.4
	Ducted	9+9+9+9	35,200	9.0	16.0	24,000	22,000	32,500	25,400	3.32	8.7
	Mixed	9+9+9+9	35,200	9.5	17.0	24,000	22,000	32,500	25,400	3.44	9.1
AOU45RLXFZ	Non-Ducted	9+9+9+9+9	45,000	10.5	19.7	48,000	28,200	36,900	31,500	3.60	10.3
	Ducted	9+9+9+9+9	45,000	9.8	17.7	46,000	27,800	36,900	31,500	3.46	9.3
	Mixed	9+9+9+9+9	45,000	10.2	18.7	47,000	28,000	36,900	31,500	3.53	9.8

HFI AOU18RLXFZ, AOU24RLXFZ, AOU36RLXFZ1, AOU45RLXFZ

		AOU18RLXFZ ASU9+ASU9	AOU24RLXFZ ASU9+ASU7+ASU7	AOU36RLXFZ1 ASU9 x 4	AOU45RLXFZ ASU9 x 5
Performance		HFI	HFI	HFI	HFI
Connectable Indoor Units		2	2 to 3	2* to 4	2 to 5
Connectable Unit Capacity Class	BTUh	14 to 21,000 ¹	14 to 27,000 ¹	27 to 39,000 ¹	34 to 54,000
Rated Capacity Cooling / Heating	BTUh	18,000 / 22,000	22,000 / 24,000	35,200 / 36,400	45,000 / 48,000
Cooling Operating Range	°F (°C)	14~115 (-10~46)	14~115 (-10~46)	14~115 (-10~46)	14~115 (-10~46)
Heating Operating Range	°F (°C)	5~75 (-15~24)	5~75 (-15~24)	5~75 (-15~24)	5~75 (-15~24)
Electrical					
Rated Input Power Clg/Htg	kW	1.44/1.87	1.76/1.73	3.52/3.00	4.28/3.88
Voltage/Frequency/Phase		208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Maximum Total Current	Amps	10.0	13.7	20.3	23.8
Minimum Circuit Ampacity	Amps	12.1	16.7	24.6	28.9
Maximum Circuit Breaker	Amps	15	20	30	30
Fan: Type x Quantity		Propeller x 1	Propeller x 1	Propeller x 1	Propeller x 1
Sound Pressure Level Cooling	dB(A)	49	51	53	53
Sound Pressure Level Heating	dB(A)	49	52	55	55
Lineset Requirements					
Minimum Lineset Length Each	ft(m)	16 (5)	16 (5)	16 (5)	16 (5)
Maximum Lineset Length Each	ft(m)	82 (25)	82 (25)	82 (25)	82 (25)
Minimum Lineset Length Total	ft(m)	49 (15)	49 (15)	66 (20)	49 (15)
Maximum Lineset Length Total	ft(m)	164 (50)	164 (50)	230 (70)	264 (80)
Pre-Charge Length Total	ft(m)	98 (30)	98 (30)	164 (50)	164 (50)
Maximum Lineset Height Difference Btwn Outdoor Unit & Furthest Indoor Unit	ft(m)	49 (15)	49 (15)	49 (15)	49 (15)
Maximum Lineset Height Difference Btwn Indoor Units	ft(m)	33 (10)	33 (10)	33 (10)	33 (10)
Lineset Diameter	Inch	Liq. 1/4 x 2 Suc. 3/8 x 2	Liq. 1/4 x 3 Suc. 1/2 x 1, 3/8 x 2	Liq. 1/4 x 4 Suc. 1/2 x 1, 3/8 x 3	Liq. 1/4 x 5 Suc. 1/2 x 2, 3/8 x 3
Size & Weight					
Net Weight	lbs. (kg)	119 (54)	124 (56)	149 (68)	205 (93)
Dimensions: Height	Inch	27-9/16	27-9/16	32-11/16	39-5/16
	mm	700	700	830	998
Width	Inch	35-7/16	35-7/16	35-7/16	38-3/16
	mm	900	900	900	970
Depth	Inch	13	13	13	14-9/16
	mm	330	330	330	370
Refrigerant		R410A	R410A	R410A	R410A

*18+18 is the only 2 indoor unit (ASU, ARU or AUU) combination and requires K9FZ1818

¹See table for allowed combinations within this connectable capacity range.



Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.


18, 24, 36,000 BTU/h XLTH MULTI-ZONE OUTDOOR UNITS



AMBIENT HEATING TEMPERATURE OF -15°F

Other models may go as low as -5°F, however they do not include a base heater and other advancements found in XLTH models. See the full **XLTH** story on page 14.

The base of Fujitsu's XLTH outdoor condensing units.

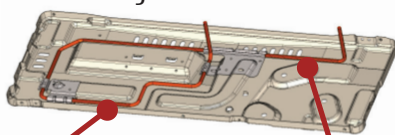

Base Heater

When temperatures reach 36°F, a built-in heater warms the base of the outdoor unit so that condensation doesn't freeze. Without a heater, freezing condensate can cause noise, damage to the fan blade, condenser, and system performance.

Base Drainage Holes

The contoured base design discharges melted water through many holes located at the bottom of the unit.




XLTH
18, 24,000 BTU/h



XLTH
36,000 BTU/h

IMPROVED HEATING CAPACITY

Heating capacity at low outdoor temperatures was improved by adopting a large heat exchanger and a high capacity compressor.

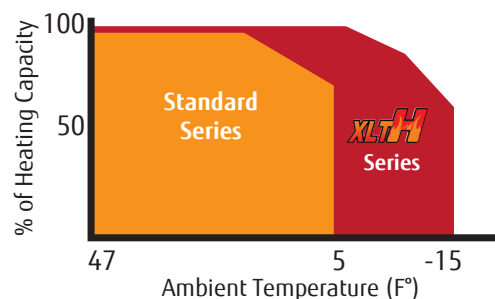

NOMINAL CAPACITIES, SEER AND HSPF RATINGS

Data below is based on AHRI 210/240 non-ducted wall mounted models. Yellow rows represent systems that are ENERGY STAR® qualified.



Model	Indoor Unit		Cooling Capacity Btu/h 95°F	EER	SEER	Heating Rated Capacity Btu/h		Heating Maximum Capacity Btu/h		COP 47°F	HSPF
	Type	Combination				47°F	17°F	17°F	5°F		
AOU18RLXFZH	Non-Ducted	9+9	18,000	13.5	21.5	22,000	14,200	23,600	22,000	3.79	10.3
	Ducted	9+9	18,000	12.4	19.0	22,000	14,200	23,600	22,000	3.60	9.0
	Mixed	9+9	18,000	13.0	20.3	22,000	14,200	23,600	22,000	3.70	9.7
AOU24RLXFZH	Non-Ducted	9+7+7	22,000	13.3	20.0	25,000	15,400	26,400	25,000	4.04	10.3
	Ducted	9+7+7	22,000	12.1	18.0	25,000	15,400	26,400	25,000	3.87	9.0
	Mixed	9+7+7	22,000	12.7	19.0	25,000	15,400	26,400	25,000	3.96	9.7
AOU36RLXFZH	Non-Ducted	9+9+9+9	35,200	13.0	20.0	36,400	21,400	39,300	36,400	4.00	10.3
	Ducted	9+9+9+9	35,200	12.0	18.0	36,400	21,400	39,300	36,400	3.88	9.3
	Mixed	9+9+9+9	35,200	12.5	19.0	36,400	21,400	39,300	36,400	3.93	9.8

HIGH-HEAT AOU18RLXFZH, AOU24RLXFZH, AOU36RLXFZH

		AOU18RLXFZH	AOU24RLXFZH	AOU36RLXFZH
Performance		XLH	XLH	XLH
Connectable Indoor Units		2	2 to 3	2 to 4
Connectable Unit Capacity Class	BTUh	14,000 to 21,000	14,000 to 27,000	27,000 to 39,000
Rated Capacity Cooling/Heating	BTUh	18,000/22,000	22,000/25,000	35,200/36,400
Cooling Operating Range	°F (°C)	14 to 115 (-10 to 46)	14~115 (-10~46)	14~115 (-10~46)
Heating Operating Range	°F (°C)	-15 to 75 (-26 to 24)	-15~75 (-26~24)	-15~75 (-26~24)
Electrical				
Rated Input Power Clg/Htg	kW	1.33/1.70	1.65/1.81	2.70/2.67
Voltage/Frequency/Phase		208-230/60/1	208-230/60/1	208-230/60/1
Maximum Total Current	Amps	16.4	20.8	26.0
Minimum Circuit Ampacity	Amps	19.7	25.1	31.5
Maximum Circuit Breaker	Amps	20	30	40
Fan: Type x Quantity		Propeller x 1	Propeller x 1	Propeller x 1
Sound Pressure Level Cooling	dB(A)	48	50	53
Sound Pressure Level Heating	dB(A)	50	52	55
Lineset Requirements				
Minimum Lineset Length Each	ft(m)	16 (5)	16 (5)	16 (5)
Maximum Lineset Length Each	ft(m)	82 (25)	82 (25)	82 (25)
Minimum Lineset Length Total	ft(m)	49 (15)	49 (15)	49 (15)
Maximum Lineset Length Total	ft(m)	164 (50)	230 (70)	230 (70)
Pre-Charge Length Total	ft(m)	98 (30)	98 (30)	164 (50)
Maximum Lineset Height Difference Btwn Outdoor Unit & Furthest Indoor Unit	ft(m)	49 (15)	49 (15)	49 (15)
Maximum Lineset Height Difference Btwn Indoor Units	ft(m)	33 (10)	33 (10)	33 (10)
Lineset Diameter	Inch	Liq. 1/4 x 2 Suc. 3/8 x 2	Liq. 1/4 x 3 Suc. 1/2 x 1, 3/8 x 2	Liq. 1/4 x 4 Suc. 1/2 x 1, 3/8 x 3
Size & Weight				
Net Weight	lbs. (kg)	134 (61)	146 (66)	205 (93)
Dimensions: Height	Inch	32-11/16	32-11/16	39-5/16
	mm	830	830	998
Width	Inch	35-7/16	35-7/16	38-3/16
	mm	900	900	970
Depth	Inch	13	13	14-9/16
	mm	330	330	370
Refrigerant		R410A	R410A	R410A



Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.

48,000 BTU_h FLEX-ZONE OUTDOOR UNIT



A Hybrid system is the blending of a complex VRF system with the simplicity of a multi-zone system to create a hybrid solution that shares the best of both systems.


Flex provides the ability to create the right combinations, the right quantity (up to 8-zones), the right style indoor units, and the right capacity. It's the right choice for your home or business.

An Inverter is a system that controls the rotational speed (not just an ON/OFF signal) of an electric motor by adjusting the frequency and voltage of the electrical power supplied to the motor. The inverter constantly regulates the compressor speed to its optimum energy usage, producing higher refrigerant performance with less power consumption.

This system provides individual temperature control throughout your home or business so each room, zone or floor will be the temperature you set! An optional Central Remote Controller is available which can control up to all 8 indoor units from one keypad.


SELF DIAGNOSTIC FEATURE

This printed circuit board provides three modes of diagnostics - setting, monitoring and function mode, as well as error codes. It also provides a pre-commissioning check function. Setting mode allows optional functions to be selected. Monitoring mode provides temperature for each thermistor, compressor operation and other functions. Function mode provides cooling test run, heating test run and pump down operation.







PIPING FLEXIBILITY

Contractors can choose the best direction for piping from the outdoor unit.

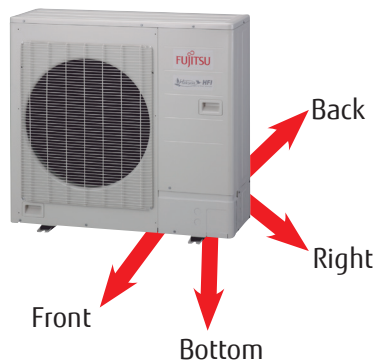


COMPACT SIZE

The compact size of outdoor unit AOU48RLXFZ1 allows for many installation opportunities.



DC TWIN ROTARY COMPRESSOR


A high performance, low noise, large capacity DC twin rotary compressor is used. Includes Quiet Mode for night operation.



HFI AOU48RLXFZ1



AOU48RLXFZ1

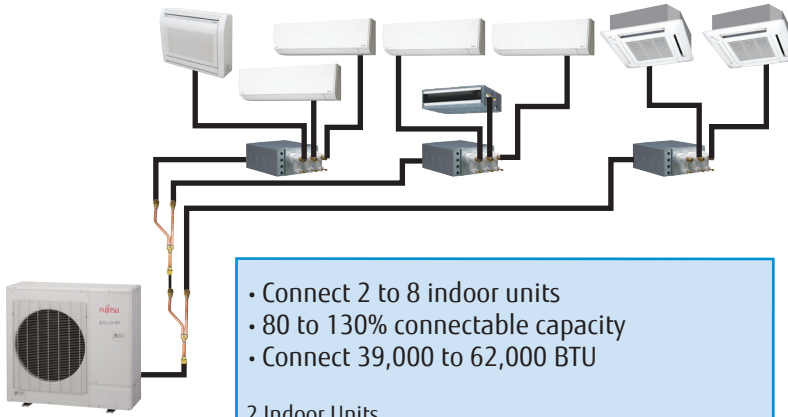

- Connect 2 to 8 indoor units
- 80 to 130% connectable capacity
- Connect 39,000 to 62,000 BTU

2 Indoor Units

18k BTUh + 24 k BTUh = 42k BTUh --OK

12k BTUh + 24 k BTUh = 36k BTUh --Not Allowed (below 80%)

8 Indoor Units

7k BTUh × 8 units = 56k BTU --OK

9k BTUh × 8 units = 72k BTU --Not Allowed (over 130%)

	SEER	HSPF	EER
Ducted	14.7	9.3	8.7
Non-Ducted	17.0	9.8	9.25
Mixed	15.8	9.5	8.97

Performance **HFI**

Connectable Indoor Units		2 - 8
Connectable Unit Capacity Class	BTUh	80~130% Nominal (39,000~62,000)
Connectable Branch Boxes		1 - 3
Nominal Cooling	BTUh	48,000
Max Cooling	BTUh	51,100
Nominal Heating	BTUh	54,000
Low Temp. Heating 17°F	BTUh	40,000
Max Heating	BTUh	57,000
Cooling Operating Range	°F (°C)	23~115 (-5~46)
Heating Operating Range	°F (°C)	5~75 (-15~24)

Electrical

Rated Input Power Cooling*	kW	5.52 / 5.19 / 5.35
Rated Input Power Heating*	kW	5.02 / 4.89 / 4.96
Voltage/Frequency/Phase		208-230/60/1
Maximum Current: Outdoor Cooling	Amps	24.5 / 23.0 / 23.7
Maximum Current: Outdoor Heating	Amps	22.3 / 21.7 / 22.0
Maximum Circuit Breaker	Amps	40
Fan: Type x Quantity		Propeller x 1
Fan Motor Output	W	111
Sound Pressure Level Cooling	dB(A)	56
Sound Pressure Level Heating	dB(A)	58

Lineset Requirements

Maximum Lineset Length Total	ft(m)	377 (115)
Max. Pipe Length Between Box & Farthest Indoor Unit	ft(m)	49 (15)
Max. Pipe Height Difference Between Outdoor Unit & Branch Box)	ft(m)	98 (30)
Maximum Lineset Height Difference Btwn Outdoor Unit & Furthest Indoor Unit	ft(m)	98 (30)
Maximum Lineset Height Difference Btwn Indoor Units	ft(m)	49 (15)
Lineset Diameter	Inch	3/8 (Liq.) 5/8 (Suc.)

Size & Weight

Net Weight	lbs. (kg)	216 (98)
Dimensions: Height	Inch	36
	mm	914
Width	Inch	38-1/4
	mm	970
Depth	Inch	14-5/8
	mm	370
Refrigerant		R410A

37*Ducted / Non-Ducted / Mixed



Applies when properly registered AND installed by a Fujitsu Elite Contractor in a residence. See full warranty for details.

BRANCH BOXES

UTP-PU03A, UTP-PU03B



	UTP-PU03A Primary	UTP-PU03B Secondary
Connectable Indoor Unit	1 ~ 3	1 ~ 3
Max. Combination BTUh	62,000 Nom.*	62,000 Nom.*
Min. Combination BTUh	7,000 Nom.*	7,000 Nom.*
Clg. Operating Range °F(°C)	25-115 (-5-46)	25-115 (-5-46)
Htg. Operating Range °F(°C)	5-75 (-15-24)	5-75 (-15-24)
%RH	80 or less	80 or less
Voltage/Frequency/Phase	208-230/60/1	208-230/60/1
Maximum Current Ampacity (A)	15	15
Running Current Rated (A): Cooling	0.050	0.050
Heating	0.050	0.050
Power Use Rated (W): Cooling	10	10
Heating	10	10

Dimensions: Gross (Flare to Flare):

Height x Width x Depth Inch

Height x Width x Depth mm

Dimensions: Net (Metal Box Only):

Height x Width x Depth Inch

Height x Width x Depth mm

Net Weight lbs. (kg)

Conn. Pipe Diameter - Main Inch

Conn. Pipe Diameter - Branch Inch

Connection Method

Connection Adapter Included Inch


	UTP-PU03A Primary	UTP-PU03B Secondary
Dimensions: Gross (Flare to Flare):		
Height x Width x Depth Inch	7-5/8 x 33 x 14-5/8	7-5/8 x 33 x 14-5/8
Height x Width x Depth mm	195 x 838 x 370	195 x 838 x 370
Dimensions: Net (Metal Box Only):		
Height x Width x Depth Inch	7-5/8 x 17 x 14-5/8	7-5/8 x 17 x 14-5/8
Height x Width x Depth mm	195 x 433 x 370	195 x 433 x 370
Net Weight lbs. (kg)	20 (9)	20 (9)
Conn. Pipe Diameter - Main Inch	(3/8 Liq. x 5/8 Suc.)	(3/8 Liq. x 5/8 Suc.)
Conn. Pipe Diameter - Branch Inch	(1/4 Liq. x 1/2 Suc.)	(1/4 Liq. x 1/2 Suc.)
Connection Method	3 pair	3 pair
Connection Adapter Included Inch	Flare	Flare
	(1/2MF x 3/8FF) x 3	(1/2MF x 3/8FF) x 3
	(1/2MF x 5/8FF) x 3	(1/2MF x 5/8FF) x 3
	No adapter needed for 18k BTU	No adapter needed for 18k BTU

*As long as the total system nominal capacity is between 39,000 and 62,000 BTUh.

Warning: Branch boxes are not weather tight enclosures and cannot be mounted outdoors or in damp environments exceeding 80% relative humidity, unless using the Branch Box Outdoor Enclosure, Part #UTP-PX-A.


ALLOWED BRANCH BOX MOUNTING DIRECTION

Threaded Rod Mount




By reversing the electrical box position you can orient the inlet and outlet pipes into a left hand or right hand configuration.

Horizontal Wall Mount



By reversing the electrical box position you can orient the inlet and outlet pipes into a left hand or right hand configuration.

Vertical Wall Mount




You cannot reverse the electrical box position when mounting the branch box vertically.

BRANCH BOX OUTDOOR ENCLOSURE

UTP-PX-A

The Branch Box Outdoor Enclosure is used to mount the indoor style Branch Box outdoors. The Branch Box Outdoor Enclosure is a painted metal cover to match the condensing unit. When Branch Box Outdoor Enclosure is not required, see Installation Manual for indoor mounting instructions.

Allowed Mounting Positions

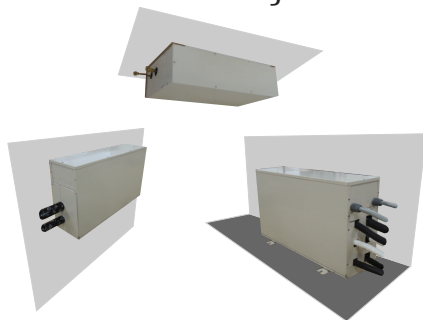

Dimensions in. (mm)


Net (HxWxD)	8-11/16 x 32 x 17-7/8 (220 x 813 x 454)
Gross (HxWxD)	3-15/16 x 33-11/16 x 20-5/16 (100 x 880 x 515)
Weight lbs. (kg)	
Net Branch Box cover only	22 (10)
Net Branch Box + Cover	44.1 (20)
Gross	30.9 (14)




SEPARATION TUBE ASSEMBLY KIT

UTP-SX248A

Size	Liquid Inch	3/8 x 3/8 x 3/8
	Suction Inch	5/8 x 5/8 x 5/8




PIPING

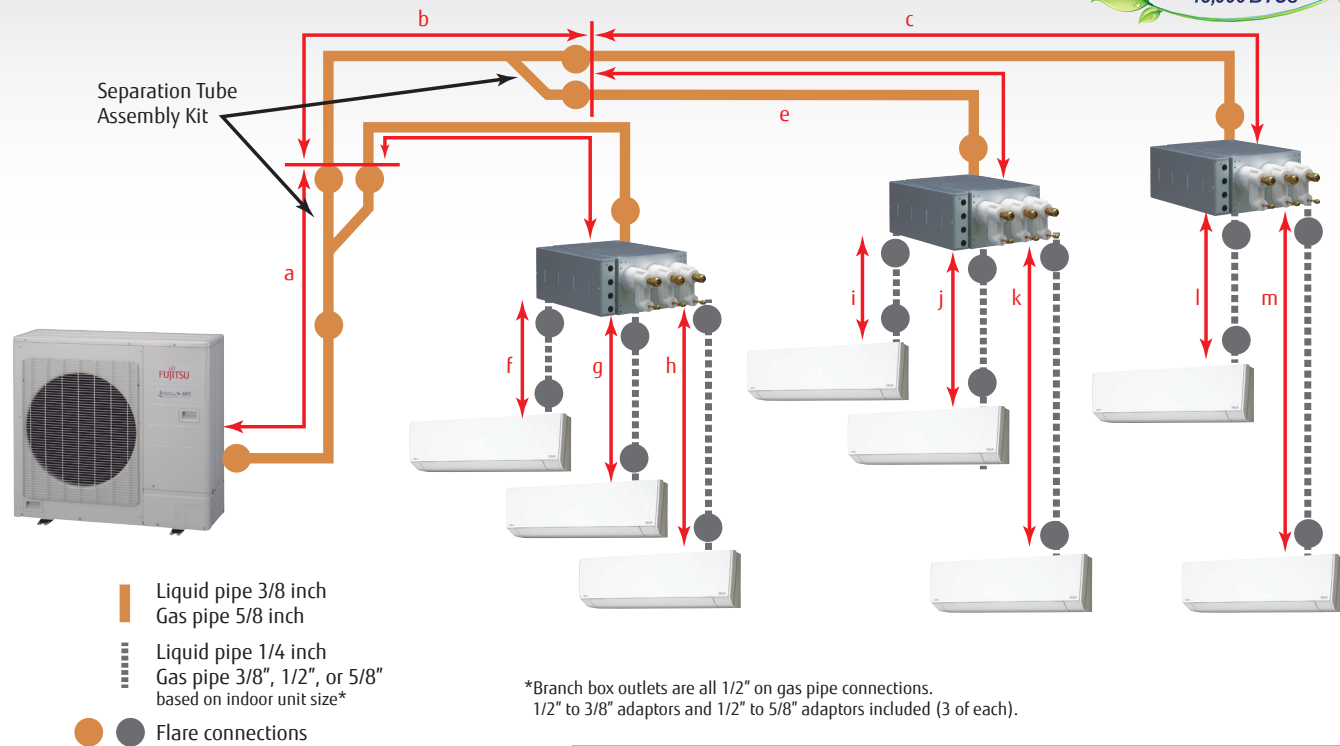


		Liquid pipe	Adaptor	Gas pipe
Branch Box to Indoor	7,000 BTUh	1/4"	included	3/8"
	9,000 BTUh		included	
	12,000 BTUh		included	
	18,000 BTUh		n/a	1/2"
	24,000 BTUh		included	5/8"
Calculate Refrigerant Charge Factory Charge 7.6 lb (3.45 kg) Unit pre-charged to 0 feet	Pipe Diameter	Location		Additional Refrig.
	3/8"	Outdoor to Branch Box		0.624 oz./ft. or 58g/meter
	1/4"	Branch Box to Indoor Unit		0.224 oz./ft. or 21g/meter
	(Total length of 3/8" liquid line × 0.624 oz./ft. or 58g/meter) + (Total length of 1/4" liquid line × 0.224 oz./ft. or 21g/meter)			
	(a+b+c+d+e) × 0.624 oz./ft. or 58g/meter + (f+g+h+i+j+k+l+m) × 0.224 oz./ft. or 21g/meter = additional refrigerant			

Total Pipe Length 377' max.**

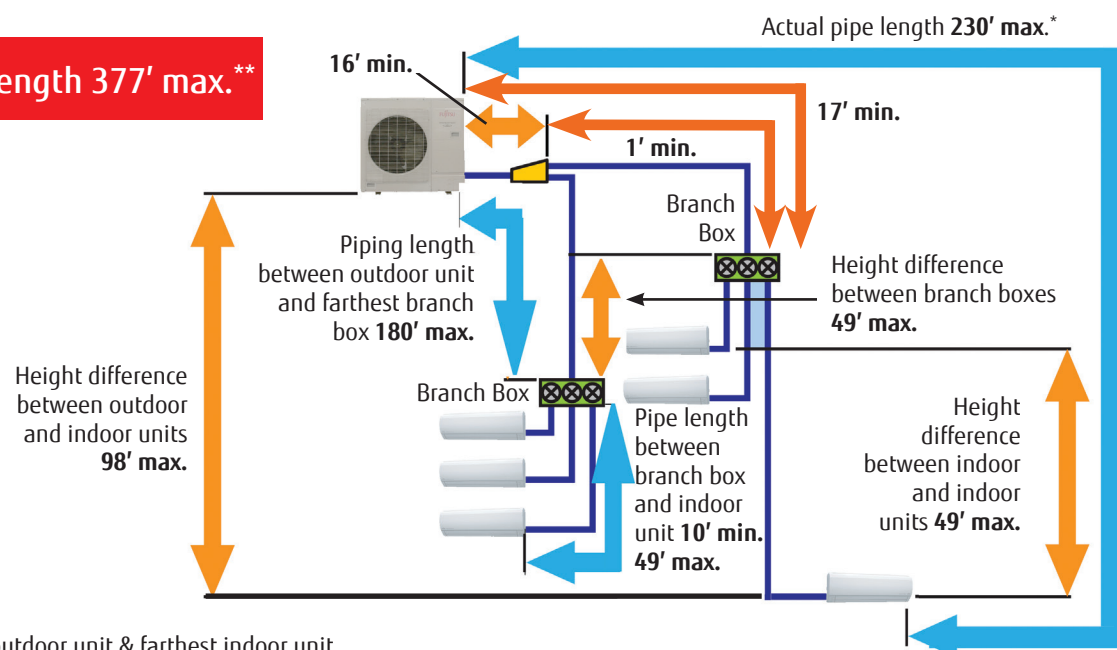

* Distance between outdoor unit & farthest indoor unit.

** Total liquid pipe or total gas pipe.

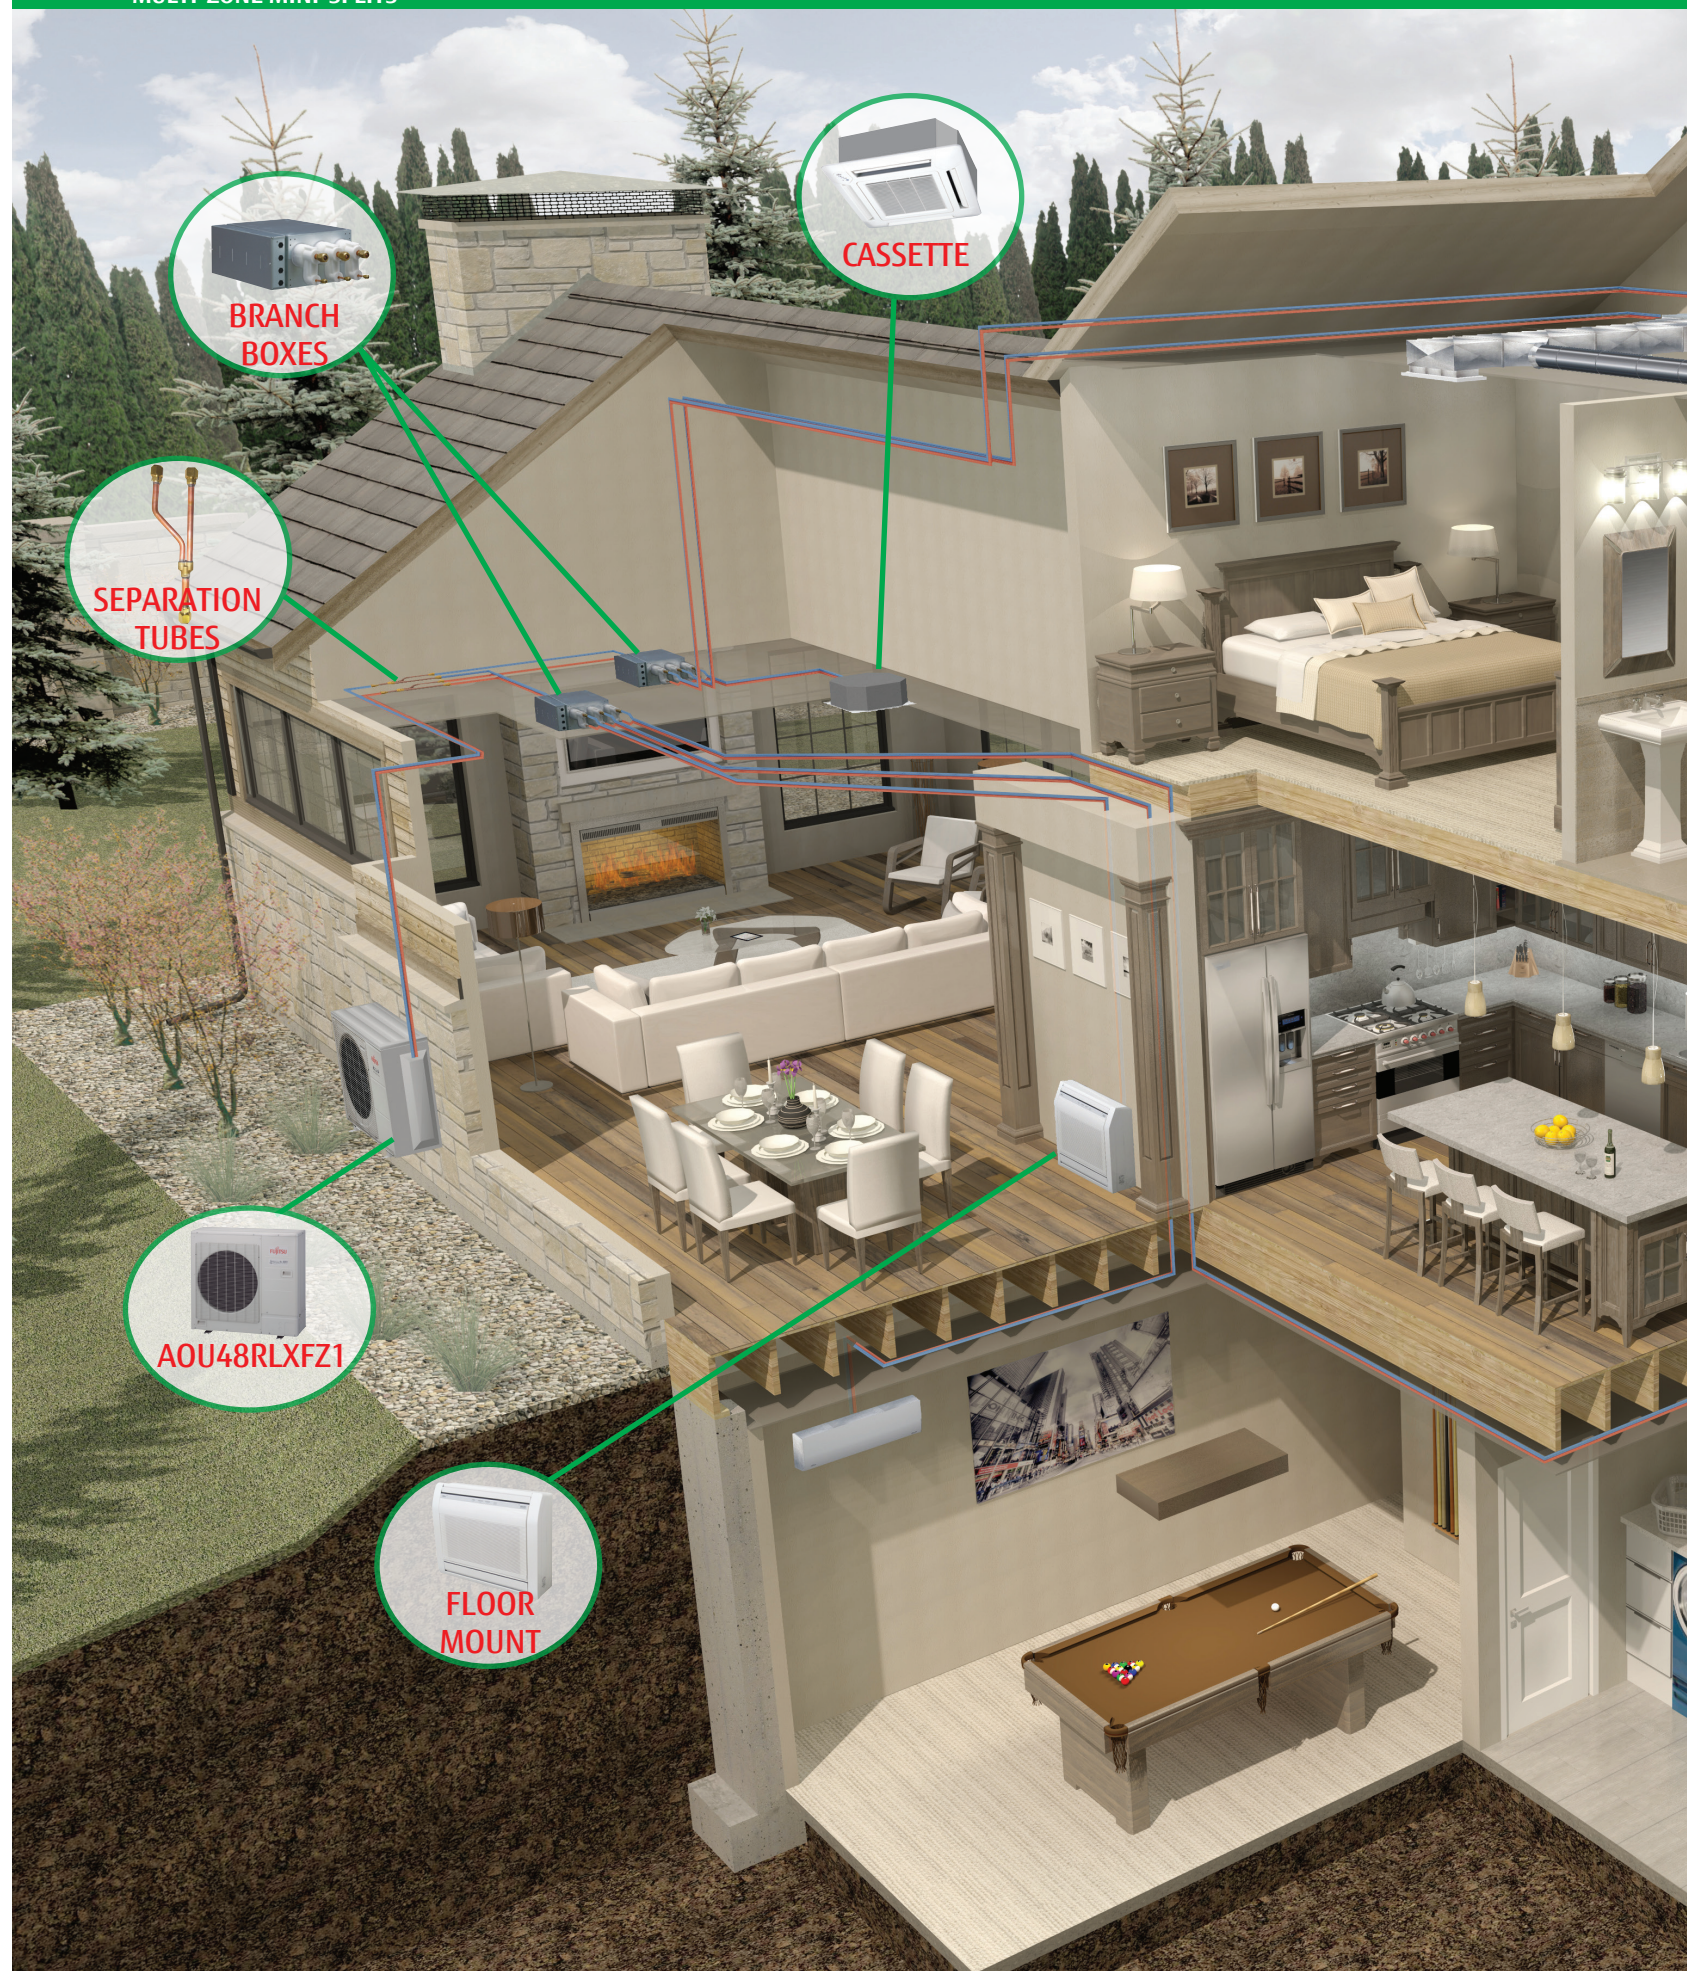



WHOLE HOME SOLUTIONS




- Connect 2 to 8 indoor units
- 80 to 130% connectable capacity
- Connect 39,000 to 62,000 BTU
- Branch boxes and separation tubes required

Cool or heat one room, a few rooms or an entire home.

ALLOWABLE COMBINATIONS

Select either an 18, 24, 36, 45 or 48,000 BTU/h outdoor unit combined with wall mounted, slim duct, compact cassette or floor mount type indoor units. Mix-and-match flexibility of evaporator type and capacity allows you to choose the indoor unit that best fits the application, whether it be hidden or showcased.

CHOOSE AN OUTDOOR UNIT:




BTU/h Capacity	7,000	9,000	12,000	15,000	18,000	24,000
----------------	-------	-------	--------	--------	--------	--------

AOU18RLXFZ / AOU18RLXFZH		AOU24RLXFZ / AOU24RLXFZH		AOU36RLXFZ1 / AOU36RLXFZH		AOU36RLXFZ1 / AOU36RLXFZH		AOU45RLXFZ		AOU48RLXFZ1	
2 INDOOR UNITS	7	7	-	-	-	14	9	9	12	-	30
	7	9	-	-	-	16	9	9	15	-	33
	7	12	-	-	-	19	9	9	18	-	36
	9	9	-	-	-	18	9	12	12	-	33
	9	12	-	-	-	21	9	12	15	-	36
	9	12	-	-	-	21	9	12	18	-	39
3 INDOOR UNITS MAX	7	7	-	-	-	14	12	12	12	-	36
	7	9	-	-	-	16	12	12	15	-	39
	7	12	-	-	-	19	7	7	7	7	28
	7	15	-	-	-	22	7	7	7	9	30
	7	18	-	-	-	25	7	7	7	12	33
	9	9	-	-	-	18	7	7	7	15	36
	9	12	-	-	-	21	7	7	7	18 [^]	39
	9	15	-	-	-	24	7	7	9	9	32
	9	18	-	-	-	27	7	7	9	12	35
	12	12	-	-	-	24	7	7	9	15	38
	12	15	-	-	-	27	7	7	12	12	38
	7	7	7	-	-	21	7	9	9	9	34
	7	7	9	-	-	23	7	9	9	12	37
	7	7	12	-	-	26	9	9	9	9	36
2 INDOOR UNITS	7	9	9	-	-	25	9	9	9	12	39
	9	9	9	-	-	27	18	18	-	-	36
	18	18	-	-	-	36	12	24	-	-	36
	7	24	-	-	-	31	15	24	-	-	39
	9	24	-	-	-	33	18	24	-	-	42
	12	24	-	-	-	36	24	24	-	-	48
4 INDOOR UNITS MAX	18*	18*	-	-	-	36	7	7	24	-	38
	7	7	15	-	-	29	7	9	18	-	34
	7	7	18	-	-	32	7	9	24	-	40
	7	7	24	-	-	38	7	12	18	-	37
	7	9	12	-	-	28	7	12	24	-	43
	7	9	15	-	-	31	7	15	15	-	37
	7	9	18	-	-	34	7	15	18	-	40
	7	12	12	-	-	31	7	15	24	-	46
	7	12	15	-	-	34	7	18	18	-	43
	7	12	18	-	-	37	7	18	24	-	49
	9	9	9	-	-	27	9	9	18	-	36
	9	9	24	-	-	42	9	9	24	-	42
	9	12	15	-	-	36	9	12	15	-	36
	9	12	18	-	-	39	9	12	18	-	39
3 INDOOR UNITS MAX	7	7	7	15	-	36	7	7	7	15	36
	7	7	7	18	-	39	7	7	7	18	39
	7	7	7	24	-	45	7	7	7	24	45
	7	7	9	12	-	35	7	7	9	12	35
	7	7	9	15	-	38	7	7	9	15	38
	7	7	9	18	-	41	7	7	9	18	41
	7	7	9	24	-	47	7	7	9	24	47
	7	7	12	12	-	38	7	7	12	12	38
	7	7	12	15	-	41	7	7	12	15	41
	7	7	12	18	-	44	7	7	12	18	44
	7	7	12	24	-	50	7	7	12	24	50
	7	7	15	15	-	44	7	7	15	15	44
	7	7	15	18	-	47	7	7	15	18	47
	7	7	15	24	-	53	7	7	15	24	53
4 INDOOR UNITS MAX	7	7	18	18	-	50	7	7	18	18	50
	7	9	9	9	-	34	7	9	9	9	34
	7	9	9	12	-	37	7	9	9	12	37
	7	9	9	15	-	40	7	9	9	15	40
	7	9	9	18	-	43	7	9	9	18	43
	7	9	9	24	-	49	7	9	9	24	49
	7	9	12	12	-	40	7	9	12	12	40
	7	9	12	15	-	43	7	9	12	15	43
	7	9	12	18	-	46	7	9	12	18	46
	7	9	12	24	-	52	7	9	12	24	52
	7	9	15	15	-	43	7	9	15	15	43
	7	9	15	18	-	46	7	9	15	18	46
	7	9	15	24	-	52	7	9	15	24	52
	7	9	18	18	-	49	7	9	18	18	49
5 INDOOR UNITS MAX	7	7	7	7	7	35	7	7	7	7	35
	7	7	7	7	9	37	7	7	7	7	37
	7	7	7	7	12	40	7	7	7	7	40
	7	7	7	7	15	43	7	7	7	7	43
	7	7	7	7	18	46	7	7	7	7	46
	7	7	7	7	24	52	7	7	7	7	52
	7	7	7	9	9	39	7	7	7	9	39
	7	7	7	9	12	42	7	7	7	9	42
	7	7	7	9	15	45	7	7	7	9	45
	7	7	7	9	18	48	7	7	7	9	48
	7	7	7	9	24	54	7	7	7	9	54
	7	7	7	12	12	45	7	7	7	12	45
	7	7	7	12	15	48	7	7	7	12	48
	7	7	7	12	18	51	7	7	7	12	51
	7	7	7	12	24	57	7	7	7	12	57


Actual rated cooling capacity of ASU15RLF1 is 14,000 BTU/h. * The optional kit "K9FZ1818 (UTP-MU36A2)" is necessary for dual zone system "18+18" with AOU36RLXFZ1 only. ^ Wall mounted type ASU18RLF cannot be connected in this combination. "-" represents available circuit for future expansion when connecting this combination.

ALLOWABLE COMBINATIONS CONT'D.

CHOOSE INDOOR UNITS:



ASU7RLF1
ASU9RLF1
ASU12RLF1
ASU15RLF1
ASU18RLF
ASU24RLF



ARU7RLF
ARU9RLF
ARU12RLF
ARU18RLF
ARU24RLF



AUU7RLF
AUU9RLF
AUU12RLF
AUU18RLF




AGU9RLF
AGU12RLF
AGU15RLF

= Allowed "Connectable Capacity" combinations between 100 and 130%

5 INDOOR UNITS MAX	7	7	7	9	18	48	AOU48RLXFZ1										7	7	18	18		50	4 INDOOR UNITS MAX	9	12	12	18		51
	7	7	7	9	24	54	2 INDOOR	18	24		42	7	7	18	24		56	9	12	12	24			57					
	7	7	7	12	12	45		24	24		48	7	7	24	24		62	9	12	15	15			51					
	7	7	7	12	15	48	7	9	24		40	7	9	9	15		40	9	12	15	18			54					
	7	7	7	12	18	51	7	12	24		43	7	9	9	18		43	9	12	15	24			60					
	7	7	7	15	15	51	7	15	18		40	7	9	9	24		49	9	12	18	18			57					
	7	7	7	15	18	54	7	15	24		46	7	9	12	12		40	9	15	15	15			54					
	7	7	9	9	9	41	7	18	18		43	7	9	12	15		43	9	15	15	18			57					
	7	7	9	9	12	44	7	18	24		49	7	9	12	18		46	9	15	15	24			63					
	7	7	9	9	15	47	7	24	24		55	7	9	12	24		52	9	15	18	18			60					
	7	7	9	9	18	50	9	9	24		42	7	9	15	15		46	12	12	12	12			48					
	7	7	9	12	12	47	9	12	18		39	7	9	15	18		49	12	12	12	15			51					
	7	7	9	12	15	50	9	12	24		45	7	9	15	24		55	12	12	12	18			54					
	7	7	9	12	18	53	9	15	18		42	7	9	18	18		52	12	12	12	24			60					
	7	7	9	15	15	53	9	15	24		48	7	9	18	24		58	12	12	15	15			54					
	7	7	12	12	12	50	9	18	18		45	7	12	12	12		43	12	12	15	18			57					
	7	7	12	12	15	53	9	18	24		51	7	12	12	15		46	12	12	15	24			63					
	7	9	9	9	9	43	9	24	24		57	7	12	12	18		49	12	12	18	18			60					
	7	9	9	9	12	46	12	12	18		42	7	12	12	24		55	12	15	15	15			57					
	7	9	9	9	15	49	12	12	24		48	7	12	15	15		49	12	15	15	18			60					
	7	9	9	9	18	52	12	15	15		42	7	12	15	18		52	12	15	18	18			63					
	7	9	9	12	12	49	12	15	18		45	7	12	15	24		58	15	15	15	15			60					
	7	9	9	12	15	52	12	15	24		51	7	12	18	18		55	15	15	15	18			63					
	7	9	12	12	12	52	12	18	18		48	7	12	18	24		61	7	7	7	7	12		40					
	9	9	9	9	9	45	12	18	24		54	7	15	15	15		52	7	7	7	7	15		43					
	9	9	9	9	12	48	12	24	24		60	7	15	15	18		55	7	7	7	7	18		46					
	9	9	9	9	15	51	15	15	15		45	7	15	15	24		61	7	7	7	7	24		52					
	9	9	9	9	18	54	15	15	18		48	7	15	18	18		58	7	7	7	9	9		39					
9	9	9	12	12	51	15	15	24		54	7	18	18	18		61	7	7	7	9	12	42							
9	9	9	12	15	54	15	18	18		51	9	9	9	12		39	7	7	7	9	15	45							
9	9	12	12	12	54	15	18	24		57	9	9	9	18		42	7	7	7	9	18	48							
						15	24	24		63	9	9	9	24		51	7	7	7	9	24	54							
						18	18	18		54	9	9	12	12		42	7	7	7	12	12	45							
						18	18	24		60	9	9	12	15		45	7	7	7	12	18	51							
						7	7	7	18	39	9	9	12	18		48	7	7	7	12	24	57							
						7	7	7	24	45	9	9	12	24		54	7	7	7	15	15	51							
						7	7	9	18	41	9	9	15	15		48	7	7	7	15	18	54							
						7	7	9	24	47	9	9	15	18		51	7	7	7	15	24	60							
						7	7	12	15	41	9	9	15	24		57	7	7	7	18	18	57							
						7	7	12	18	44	9	9	18	18		54	7	7	9	9	9	41							
						7	7	12	24	50	9	9	18	24		60	7	7	9	9	12	44							
						7	7	15	15	44	9	12	12	12		45	7	7	9	9	15	47							
						7	7	15	18	47	9	12	12	15		48	7	7	9	9	18	50							
						7	7	15	24	53																			

ALLOWABLE COMBINATIONS CONT'D

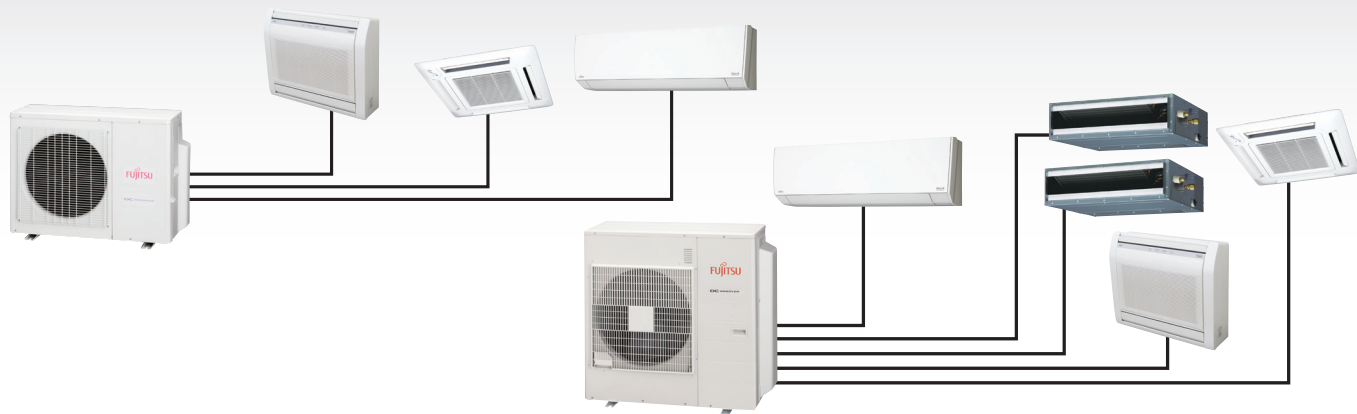

BTUh Capacity 7,000 9,000 12,000 15,000 18,000 24,000

— = Allowed "Connectable Capacity" combinations between 100 and 130%

AOU48RLXFZ1, con't.

AOU48RLXFZ1, con't.							
5 INDOOR UNITS MAX	7	7	9	9	24	56	
	7	7	9	12	12	47	
	7	7	9	12	15	50	
	7	7	9	12	18	53	
	7	7	9	12	24	59	
	7	7	9	15	15	53	
	7	7	9	15	18	56	
	7	7	9	15	24	62	
	7	7	9	18	18	59	
	7	7	12	12	12	50	
	7	7	12	12	15	53	
	7	7	12	12	18	56	
	7	7	12	12	24	62	
	7	7	12	15	15	56	
	7	7	12	15	18	59	
	7	7	12	18	18	62	
	7	7	15	15	15	59	
	7	7	15	15	18	62	
	7	9	9	9	9	43	
	7	9	9	9	12	46	
7	9	9	9	15	49		
7	9	9	9	18	52		
7	9	9	9	24	58		
7	9	9	12	12	49		
7	9	9	12	15	52		
7	9	9	12	18	55		
7	9	9	12	24	61		
7	9	9	15	15	55		
7	9	9	15	18	58		
7	9	9	18	18	61		
7	9	12	12	12	52		
7	9	12	12	15	55		
7	9	12	12	18	58		
7	9	12	15	15	58		
7	9	12	15	18	61		
7	9	15	15	15	61		
7	9	15	15	18	64		
5 INDOOR UNITS MAX	7	12	12	12	12	55	
	7	12	12	12	15	58	
	7	12	12	12	18	61	
	7	12	12	15	15	61	
	7	12	15	15	15	64	
	9	9	9	9	9	45	
	9	9	9	9	12	48	
	9	9	9	9	15	51	
	9	9	9	9	18	54	
	9	9	9	9	24	60	
	9	9	9	12	12	51	
	9	9	9	12	15	54	
	9	9	9	12	18	57	
	9	9	9	15	15	57	
	9	9	9	15	18	60	
	9	9	12	12	12	54	
	9	9	12	12	15	57	
	9	9	12	12	18	60	
	9	9	12	15	15	60	
	9	9	12	15	18	63	
	9	9	15	15	15	63	
	9	12	12	12	12	57	
	9	12	12	12	15	60	
	9	12	12	15	15	63	
	12	12	12	12	12	60	
12	12	12	12	15	63		
6 INDOOR UNITS MAX	7	7	7	7	7	42	
	7	7	7	7	7	9	44
	7	7	7	7	7	12	47
	7	7	7	7	7	15	50
	7	7	7	7	7	18	53
	7	7	7	7	7	24	59
	7	7	7	7	9	9	46
	7	7	7	7	9	12	49
	7	7	7	7	9	15	52
	7	7	7	7	9	18	55
	7	7	7	7	9	24	61
	7	7	7	9	9	9	48
	7	7	7	9	9	12	51
	7	7	7	9	9	15	54
	7	7	7	9	9	18	57
	7	7	7	9	12	12	54
	7	7	7	9	12	15	57
	7	7	7	9	12	18	60
	7	7	7	9	15	15	60
	7	7	7	9	15	18	63
	7	7	7	12	12	12	57
	7	7	7	12	12	15	60
	7	7	7	12	15	15	63
	7	7	7	12	15	18	66
	7	7	9	9	9	9	50
	7	7	9	9	9	12	53
7	7	9	9	9	15	56	
7	7	9	9	9	18	59	
7	7	9	9	12	12	56	
7	7	9	9	12	15	59	
7	7	9	9	12	18	62	
7	7	9	9	15	15	62	
7	7	9	9	15	18	65	
7	7	9	9	18	18	68	
7	7	9	12	12	12	62	
7	7	9	12	12	15	65	
7	7	9	12	12	18	68	
7	7	9	15	15	15	65	
7	7	9	15	15	18	68	
7	7	9	18	18	18	71	
7	7	9	18	18	24	74	
7	7	9	24	24	24	77	
7	7	9	24	24	24	80	
7	7	9	24	24	24	83	
7	7	9	24	24	24	86	
7	7	9	24	24	24	89	
7	7	9	24	24	24	92	
7	7	9	24	24	24	95	
7	7	9	24	24	24	98	
7	7	9	24	24	24	101	
7	7	9	24	24	24	104	
7	7	9	24	24	24	107	
7	7	9	24	24	24	110	
7	7	9	24	24	24	113	
7	7	9	24	24	24	116	
7	7	9	24	24	24	119	
7	7	9	24	24	24	122	
7	7	9	24	24	24	125	
7	7	9	24	24	24	128	
7	7	9	24	24	24	131	
7	7	9	24	24	24	134	
7	7	9	24	24	24	137	
7	7	9	24	24	24	140	
7	7	9	24	24	24	143	
7	7	9	24	24	24	146	
7	7	9	24	24	24	149	
7	7	9	24	24	24	152	
7	7	9	24	24	24	155	
7	7	9	24	24	24	158	
7	7	9	24	24	24	161	
7	7	9	24	24	24	164	
7	7	9	24	24	24	167	
7	7	9	24	24	24	170	
7	7	9	24	24	24	173	
7	7	9	24	24	24	176	
7	7	9	24	24	24	179	
7	7	9	24	24	24	182	
7	7	9	24	24	24	185	
7	7	9	24	24	24	188	
7	7	9	24	24	24	191	
7	7	9	24	24	24	194	
7	7	9	24	24	24	197	
7	7	9	24	24	24	200	
7	7	9	24	24	24	203	
7	7	9	24	24	24	206	
7	7	9	24	24	24	209	
7	7	9	24	24	24	212	
7	7	9	24	24	24	215	
7	7	9	24	24	24	218	
7	7	9	24	24	24	221	
7	7	9	24	24	24	224	
7	7	9	24	24	24	227	
7	7	9	24	24	24	230	
7	7	9	24	24	24	233	
7	7	9	24	24	24	236	
7	7	9	24	24	24	239	
7	7	9	24	24	24	242	
7	7	9	24	24	24	245	
7	7	9	24	24	24	248	
7	7	9	24	24	24	251	
7	7	9	24	24	24	254	
7	7	9	24	24	24	257	
7	7	9	24	24	24	260	
7	7	9	24	24	24	263	
7	7	9	24	24	24	266	
7	7	9	24	24	24	269	
7	7	9	24	24	24	272	
7	7	9	24	24	24	275	
7	7	9	24	24	24	278	
7	7	9	24	24	24	281	
7	7	9	24	24	24	284	
7	7	9	24	24	24	287	
7	7	9	24	24	24	290	
7	7	9	24	24	24	293	
7	7	9	24	24	24	296	
7	7	9	24	24	24	299	
7	7	9	24	24	24	302	
7	7	9	24	24	24	305	
7	7	9	24	24	24	308	
7	7	9	24	24	24	311	
7	7	9	24	24	24	314	
7	7	9	24	24	24	317	
7	7	9	24	24	24	320	
7	7	9	24	24	24	323	
7	7	9	24	24	24	326	
7	7	9	24	24	24	329	
7	7	9	24	24	24	332	
7	7	9	24	24	24	335	
7	7	9	24	24	24	338	
7	7	9	24	24	24	341	
7	7	9	24	24	24	344	
7	7	9	24	24	24	347	
7	7	9	24	24	24	350	
7	7	9	24	24	24	353	
7	7	9	24	24	24	356	
7	7	9	24	24	24	359	
7	7	9	24	24	24	362	
7	7	9	24	24	24	365	
7	7	9	24	24	24	368	
7	7	9	24	24	24	371	
7	7	9	24	24	24	374	
7	7	9	24	24	24	377	
7	7	9	24	24	24	380	
7	7	9	24	24	24	383	
7	7	9	24	24	24	386	
7	7	9	24	24	24	389	
7	7	9	24	24	24	392	
7	7	9	24	24	24	395	
7	7	9	24	24	24	398	
7	7	9	24	24	24	401	
7	7	9	24	24	24	404	
7	7	9	24	24	24	407	
7	7	9	24	24	24	410	
7	7	9	24	24	24	413	
7	7	9	24	24	24	416	
7	7	9	24	24	24	419	
7	7	9	24	24	24	422	
7	7	9	24	24	24	425	
7	7	9	24	24	24	428	
7	7	9	24	24	24	431	
7	7	9	24	24	24	434	
7	7	9	24	24	24	437	
7	7	9	24	24	24	440	
7	7	9	24	24	24	443	
7	7	9	24	24	24	446	
7	7	9	24	24	24	449	
7	7	9	24	24	24	452	
7	7	9	24	24	24	455	
7	7	9	24	24	24	458	
7	7	9	24	24	24	461	
7	7	9	24	24	24	464	
7	7	9	24	24	24	467	
7	7	9	24	24	24	470	
7	7	9	24	24	24	473	
7	7	9	24	24	24	476	
7	7	9	24	24	24	479	
7	7	9	24	24	24	482	
7	7	9	24	24	24	485	
7	7	9	24	24	24	488	
7	7	9	24	24	24	491	
7	7	9	24	24	24	494	
7	7	9	24	24	24	497	
7	7	9	24	24	24	500	
7	7	9	24	24	24	503	
7	7	9	24	24	24	506	
7	7	9	24	24	24	509	
7	7	9	24	24	24	512	
7	7	9	24	24	24	515	
7	7	9	24	24	24	518	
7	7	9	24	24	24		

CONTROLS

Wired Remote Control

UTY-RNNUM
UTY-RNBYU
3-Wire

**Group
Control**



The wired remote control with its unique lock function and sleek design provides full feature access to property managers, building owners, and facility maintenance, as well as providing basic comfort features to tenants, employees, and teachers.

Wired Remote Control

UTY-RVNUM
3-Wire

**Group
Control**



Features a large backlit LCD display and displays the room temperature. Provides full feature access to property managers, building owners, and facility maintenance, as well as providing basic comfort features to tenants, employees, and teachers.

Simple Remote Control

UTY-RSNUM
3-Wire

**Group
Control**



Suitable when only basic operations are required for hotels, offices and other places where there is frequent arrival and departure of occupants. Remote does not allow any timer settings.

Remote Sensor

UTY-XSZX



Wall mounted room temperature sensor for slim duct models. Replaces room temperature sensor in the return when installed while still allowing for temperature correction.

Simple Remote Control

2-Wire
UTY-RSRY

**Group
Control**



Backlit 2-wire remote with built in temperature sensor. Offers set point adjustment in 1°F increments. (Compatible with System 30RLXEH)

Wired Remote (Touch Panel)

UTY-RNRUZ1
2-Wire

**Group
Control**



Features a large backlit LCD display and displays the room temperature. Provides full feature access to property managers, building owners, and facility maintenance, as well as providing basic comfort features to tenants, employees, and teachers. (Compatible with System 30RLXEH)

Wireless Remote Control

UTY-LNHUM



For spaces where there is just no place to mount the wired remote or where wireless operation is preferred.

Central Controller

UTY-DMMUM
3-Wire



This remote controls up to 8 individual indoor units. Set temperatures on timers to best meet individuals needs. Includes a large backlit LCD and 4-way navigation pad. Remote connects in daisy chain to branch boxes.

Receiver Unit

UTY-LRHUM

3-Wire



For slim duct models. Includes a wireless remote control.

Group Control: With this feature, multiple evaporators can be 'daisy-chained' together on one single remote control, allowing for multiple single-zoned systems installed in an application to be grouped together by evaporator. The same feature can be used on a multi-zone system however, multiple multi-zone systems cannot be grouped together nor can a single-zone system be group controlled with a multi-zone system. For additional information, see Engineering Bulletin # 036 and/or 037.

WI-FI DEVICES

See compatibility table, page 13.

IR Wireless Module

Model: FJ-IR-WIFI-1NA

Works with
IntesisHome® app


**Wired Module**

Model: FJ-RC-WIFI-1NA


Works with
IntesisHome® app



SAMPLE WI-FI APP SCREEN DISPLAYS



IntesisHome®



FGLair®

Wi-Fi Module

Model: UTY-TFNXZ2

Works with
FGLair® app



ADDITIONAL CONTROLS

Network Converter

UTY-VTGX

The Network Converter is used to control and monitor one or more single-zone Halcyon indoor units (max of 16 IDU's per converter) through Airstage VRF Central Controllers.

**Thermostat Converter**

UTY-TTRX

Control Halcyon products¹ using a third party thermostat. Up to 16 indoor units can be connected as a group to one thermostat converter.



[^] Minimum Heat, Sleep Timer functions will be lost when the wired remote control is installed.

^{*} Wall mounted ASU7, 9, and 12RLF1 require accessory interface kit (Part UTY-XCBXZ2) in order to connect this device to them. Wall mounted ASU9, 12, and 15RLS3/H require accessory interface kit (Part UTY-TWBXF1) in order to connect this device to them.

¹ NOT compatible with models ABU18/24RULX, ABU36RSLX, AUU18/24/36/42RCLX.

INTERFACE KITS

Dry Contact Wire Kit*
UTY-XWZX/UTY-XWZXZ5

Turns system on or off using a normally open circuit. For example in home automation, BMS integration of only On/Off operation, occupancy sensor, key card switch, or lead-lag control of other heating/cooling devices.

Slim Duct Connector Kit
UTD-ECS5A

Comes with 5 sets of wires. Can be used to turn unit on/off, wire in float switch, AUX heater, turn on an external device (Fan), or show if the unit is running.

Interface Kit
UTY-XCSXZ1

Required to connect ASU30RLE to Dry Contact Wire Kit UTY-XWZX3, and Lead Lag Control function^.

Interface Kit
UTY-XCBXZ2

Required to connect ASU7RLF1, 9RLF1, and 12RLF1 to Wired Remotes UTY-RNNUM and UTY-RVNUM, Dry Contact Wire Kit UTY-XWZX, and Simple Remote Control UTY-RSNUM.

Outdoor Unit Input/Output Connector
UTY-XWZXZ3

Gives the ability to limit the noise of the unit*, stop the outdoor unit, limit power consumption*, control the operating mode (Htg/Clg), or use output status to see if the compressor is running. You will need to order a kit for each option.

Interface Kit Box
UTZ-GXXB

Used to conceal Interface Kit UTY-XCSXZ1.

Interface Kit
UTY-TWBF1

Required to connect the ASU15RLS2/H* and ASU9, 12, 15RLS3/H to Wired Remotes UTY-RNNUM and UTY-RVNUM, Dry Contact Wire Kit UTY-XWZXZ5, and Simple Remote Control UTY-RSNUM.

Outdoor Unit Base Heater Connector
UTY-XWZXZ4

Used to hook up an AUX base pan heater to the outdoor unit. Heater will stop ice from forming in the outdoor unit. Base heater will operate when outdoor temperature is below 36°F. Heater is field supply. Heaters greater than 25W can't be fed directly from the board, but have to be powered from another source.

* Will reduce capacity.

^ Wired remotes cannot be used when using this feature. This includes UTY-RNRUZ1, UTY-RVNUM, UTY-RNNUM, UTY-RSNUM.


FRESH AIR INTAKE KITS

High Humidity Insulation Kit
UTZ-KXGC

Additional insulation for compact cassette units, which may be needed when they are installed in high humidity areas.

**Air Outlet Shutter Plate**
UTR-YDZB

In a 3-way air flow configuration an Air Outlet Shutter Plate kit is required to block air flow of 1 louver.

**Fresh Air Intake Kit**
UTZ-VXAA

Mixes room air then passes it through a heat exchanger. Allows for a 4-inch flex duct connection. Requires a field supplied duct booster fan capable of 60 CFM at .2"W.C. or 90 CFM at .4"W.C. For fan static pressure requirements, see installation manual.

Fresh Air Intake Kit
KHRS940-25

Fresh air kit for RCLX/RULX/RLSX systems. Kit contains Current Sensor with Built-in Relay and Switching Power Supply. Requires field supplied ductwork and a fan capable of generating 15 CFM at a static pressure of approximately 0.26" WC.

MISCELLANEOUS

3-Pole Single Throw Safety Switch
K3PST


For use where code requires a disconnect at the indoor unit.

**R410A Swivel Adapter**
K9R410A55

In order to minimize incorrect charging of systems with R22 Fujitsu uses a different access port. Contractors will need this 55-degree swivel access fitting.

**Plug Model**
UTY-WIFI

In order to connect certain models to Wired Wi-Fi Module, FJ-RC-WIFI-1NA, this plug must be used.

Condensate Pump
UTR-DPB24T

OEM design plugs into factory harness for ease of installation. Rated for 11.8" of vertical lift. Only used with System 36RSLX.

18+18 Combo Fittings Kit
K9FZ1818

Allows two 18,000 BTU indoor units to be used on an outdoor AOU36RLXFZ1. Requires special piping; limited to only 18,000 BTU models. Total BTU capacity is limited to 31,600 BTU in cooling. The kit upsizes linesets to 3/8" and 1/2".

Auto Louver Grille Kit
UTD-GXSA-W (for ARU7/9/12)
UTD-GXSB-W (for ARU18)
UTD-GXSC-W (for ARU24)

Auto Louver provides comfortable airflow and blends in with various interiors. Grille can be connected either directly to indoor unit or through the rectangular duct. Only compatible with ARU models with serial numbers greater than 2000.

ACCESSORY COMPATIBILITY

[illegible]

1 If using UTY-RNBYU with these models you need to change the dip switch SW-1 to "ON". Refer to Tech Tip #028.
2 Wall mounted ASU9, 12, and 15RLS3Y/RLS3YH require accessory interface kit #UTY-TWBXF1 in order to connect these devices to them.
3 Wall mounted ASU7, 9, and 12RLF1 require accessory interface kit #UTY-XCBXZ2 in order to connect these devices to them.†† Only multi-zone models greater than specific serial numbers are compatible with UTY-RV-
NUM. See Service Bulletin 0031 for serial number compatibility.t
5 Plug model #UTY-WIFI required to connect these devices to them.
6 Wireless Receiver #UTY-LRHUM is required in order to connect this device.
* Requires accessory interface kit #UTY-XCBXZ2 and plug model #UTY-WIFI in order to connect these devices to them.
† Requires accessory interface kit #UTY-TWBXF1 and plug model #UTY-WIFI in order to connect these devices to them.

LINE SET SIZES AND LENGTHS

SINGLE-ZONE SYSTEMS																																							
	9RL2	9RLFF	9RLFFH	9RLFW1	9RLS3	9RLS3H	12RL2	12RLFF	12RLFFH	12RLFW1	12RLS3	12RLS3H	15RLFF	15RLFFH	15RLS3	15RLS3H	18RLB	18RLXFW1	18RLXFWH	24RLXFW1	24RLXFWH	24RLB	30RLXEH	30RLXB	36RLXB	9RLFCD	12RLFCD	18RLFCD	9RLFCC	12RLFCC	18RLFCC	18RLUX	24RLUX	36RLSX	18RLCX	24RLCX	36RLCX	42RLCX	
1/4" x 3/8"	●	●	●	●	●	●	●	●	●	●	●	●														●	●		●	●									
1/4" x 1/2"													●	●	●	●	●					●							●			●	●						
1/4" x 5/8"																																							
3/8" x 1/2"																																							
3/8" x 5/8"																		●	●	●	●		●	●	●									●	●		●	●	●
Total System																																							
Max. Combined Pipe Length ft (m)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	165 (50)	165 (50)	165 (50)	165 (50)	66 (20)	246 (75)	165 (50)	165 (50)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	66 (20)	165 (50)	165 (50)	165 (50)	165 (50)	165 (50)	165 (50)	230 (70)
Min. Combined Pipe Length ft (m)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	16 (5)	16 (5)	16 (5)	16 (5)	10 (3)	16 (5)	16 (5)	16 (5)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	10 (3)	16 (5)	16 (5)	16 (5)	16 (5)	16 (5)	16 (5)	16 (5)

While these systems share indoor units, different line sizes are required.

MULTI / FLEX ZONE MODELS																																	
	ASU7RLF1	ASU9RLF1	ASU12RLF1	ASU18RLF	ASU24RLF	AGU9RLF	AGU12RLF	AGU15RLF	ARU7RLF	ARU9RLF	ARU12RLF	ARU18RLF	ARU24RLF	AUU7RLF	AUU9RLF	AUU12RLF	AUU18RLF	ASU18RLF x 2*	AGU18RLF x 2*	ARU18RLF x 2*	AUU18RLF x 2*	UTP-PU03A/B^	AOU18RLFZ	AOU18RLFZH	AOU24RLFZ	AOU24RLFZH	AOU36RLFZ1	AOU36RLFZ1 (18+18)	AOU36RLFZH	AOU45RLFZ	AOU48RLFZ1		
1/4" x 3/8"	●	●	●			●	●		●	●	●			●	●	●																	
1/4" x 1/2"				●				●				●					●																
1/4" x 5/8"					●								●																				
3/8" x 1/2"																		●		●	●												
3/8" x 5/8"																					●												
Total System																																	
Max. Combined Pipe Length ft (m)																							165 (50)	165 (50)	165 (50)	165 (50)	230 (70)	131 (40)	230 (70)	264 (80)	377 (115)		
Min. Combined Pipe Length ft (m)																							49 (15)	49 (15)	49 (15)	49 (15)	66 (20)	49 (15)	49 (15)	49 (15)	16' 10" (5)	10' ² (3) ²	
Each Indoor Unit	Minimum and maximum pipe lengths for multi-zone units are found on pages 55, 57 and 60.																																

*18+18 is the only 2 indoor unit combination allowed for AOU36RLFZ1 and requires kit K9FZ1818.

While these systems share indoor units, different line sizes are required.

Line set size from outdoor unit AOU48RLFZ1 to the branch boxes.

¹ Minimum combined pipe length from outdoor unit to branch box.

² Minimum combined pipe length from branch box to indoor unit each.

FUJITSU MODEL NOMENCLATURE

Model	18	R	L	X	F	Z	H
ASU Wall Mount	BTUh in thousands	R = Reverse cycle heat pump	C = Cassette	L = Inverter	S = Super Efficient	Z = Zone	H = High Heating
ABU Universal Mount Ceiling Susp.		C = Cooling only	S = Ceiling Susp.	X = Extended Line Set	X = Extended Line Set	W = Wall Mount Only	
ARU Slim Duct			L = Inverter	S = Super Efficient	F = HFI (when followed by "W" or "Z") or Floor Mount	H = High Heating	
AUU Cassette Mount			U = Universal	F = HFI	H = High Heating		
AGU Floor Mount				B = 230V	W = Wall Mount Only		
AOU Outdoor Unit					C = Compact Cassette or Slim Duct		
					B = 230V		
					E = Engineering Series		

* 1, 2 or 3 at the end of a model number denotes a model revision. Please note models may not be combined with each other.

THINGS TO KNOW BEFORE YOU BUY A FUJITSU SYSTEM

COMPLETE SYSTEM WARRANTY

Standard warranties vary depending on model:



6 Year Compressor / 2 Year Parts warranty OR



7 Year Compressor / 5 Year Parts warranty.

Extended warranties include:



10 Year Compressor/Parts warranty for Halcyon systems that have been installed by a licensed contractor and the online Product Registration* has been submitted.



12 Year Compressor/Parts warranty for Halcyon systems that have been installed by an Elite Contractor and the online Product Registration* has been submitted.

10-Year and 12-Year warranties exclude: R22 models, IAQ models, ASU30RLX, ABU18RLX, ABU24RLX, ABU36RLX, AUU18RLX, AUU24RLX, AUU36RLX, AUU42RLX, AOU18RLX, AOU24RLX, AOU30RLX, AOU36RLX, AOU42RLX

* Residents of California and Quebec are not required to register the System in order to obtain all of the rights and remedies applicable to this Warranty.

For full details, see Halcyon Warranty Statement.

TRADEMARKS

The Fujitsu logo is a registered trademark of Fujitsu Limited. The Halcyon and Halcyon HFI logos and names are trademarks of Fujitsu General America, Inc. ENERGY STAR® is a registered trademark of the EPA and DOE. Copyright © 2017 Fujitsu General America, Inc.

NON-INTERNET RETAIL POLICY

Internet sales are strictly prohibited and unauthorized. Any HVAC systems purchased on the Internet, from an online retailer or any similar e-tailing website, OR where the original factory serial numbers of the display have been removed, defaced, or replaced in any way WILL NOT BE COVERED BY WARRANTY.

Note: Condensing units come pre-charged from factory. Additional refrigerant may be required, be sure to check installation manual for more details.

NOTE

- Cooling capacity is based on the following conditions:
Indoor temperature: 80°F DB/67°F WB (26.7°C DB/19.4°C WB)
Outdoor temperature: 95°F DB/75°F WB (35°C DB/23.9°C WB)
- Heating capacity is based on the following conditions:
Indoor temperature: 70°F DB (21.1°C DB)
Outdoor temperature: 47°F DB/43°F WB (8.3°C DB/6.1°C WB)

THINGS TO KNOW BEFORE YOU INSTALL A FUJITSU SYSTEM

WARNING

Always use a licensed installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion. Use only parts and accessories supplied or specified by Fujitsu. Ask a licensed contractor to install parts and accessories. Use of unauthorized or improper installation of parts and accessories can result in injury or property damage. Read the owner's operation manual carefully before using this product. The owners operation manual provides important safety instructions and warnings which should be followed closely. For any questions or concerns, please contact Fujitsu General America, Inc. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.

HEAT PUMP DISCLAIMER

In most climates a heat pump will handle all of your heating needs. However, this system sometimes requires some other additional source of heat to satisfy heating requirements in the coldest environments. Almost all of Fujitsu's heat pumps use inverter technology and as such offer a wider operating range and more heat capacity than a standard heat pump but will not provide adequate heating if improperly sized or operated outside of its operating range. Specifications vary by model; please consult your contractor before choosing a heat pump as your only source of heat. Systems will maintain temperature up to +/-4 degrees relative to set temperature. To increase energy efficiency on multi-type systems, you should turn off the evaporators when heating or cooling is not needed.

DISCLAIMER

Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

CERTIFICATIONS

ISO

ISO14001 is the standard defined by the International Organization for Standardization (ISO) related to environmental management systems. Fujitsu General America, Inc. has been acknowledged by an internationally accredited compliance organization as having an appropriate program of environmental protection procedures and activities to meet the requirements of ISO14001. The air conditioners manufactured by Fujitsu have received ISO9001 series certification for quality assurance.



ASTM

Our outdoor units shall withstand 1,000 hours of salt spray tested per procedure ASTM B117.

ROHS COMPLIANT

Fujitsu participates in the RoHS Directive, which is the Restriction of Hazardous Substances in electrical and electronic equipment. It is an EU directive intended protect the environment by forcing manufacturers to eliminate or severely curtail the use of cadmium, hexavalent chromium, and lead in all products from automobiles to consumer electronics.





AHRI ENERGY GUIDE® PROGRAM (U.S.)

To view AHRI numbers or Energy Guide labels, please go to www.ahridirectory.org.



HRAI ENERGY GUIDE® PROGRAM (CANADA)

Samples:



For over 40 years,
making the hottest places cool
and the coolest places...
more comfortable.

Halcyon Mini-Splits Are For You If:

- If you want to reduce your utility bills by up to 25%
- Central air quotes give you sticker shock
- You don't want to lose space to ductwork
- You have warm or cold spots in your home or business
- Your window air conditioner's noise prevents you from hearing the television

Halcyon 



Distributed by:

FUJITSU

INFINITE COMFORT

Fujitsu General America, Inc.
353 Route 46 West
Fairfield, NJ 07004
Toll Free: (888) 888-3424
Local: (973) 575-0380
Fax: (973) 836-0447
Email: hvac@fujitsugeneral.com
www.fujitsugeneral.com

 is worldwide trademark of FUJITSU GENERAL LIMITED and is a registered trademark of Japan, the USA, and other countries or areas.

 is worldwide trademark of FUJITSU GENERAL LIMITED.

Part #6-26-FG2028 Rev. 1/18



A subsidiary of
Fujitsu General Limited